

iST POWER

Longley Lane
Wythenshawe
Manchester

M22 4RU Tel: +44 (0)161 428 9507
Email: sales@istpower.com
Web: www.istpower.com



INSTALLATION, COMMISSIONING, OPERATION & MAINTENANCE INSTRUCTIONS

BAM NUTTALL

70kVA 33kV SELF-BUNDED AUXILIARY TRANSFORMER

MANUAL NUMBER: MM0719
ISSUE 0

TRANSFORMER SPECIFICATION: 0105449

CUSTOMER ORDER NUMBER: 4500492302/1
4500506081
4500506086
4500507466

SERIAL NUMBERS: S-103276/1-01
S-103276/1-02
S-103324/1-01
S-103325/1-01
S-103325/1-02
S-103326/1-01
S-103326/1-02
S-103376/1-01
S-103376/1-02

REVISION RECORD

Revision	Change	Author	Date
0	First Issue	R.L.	31/05/2022

<u>1.0</u>	<u>Introduction</u>
1.1	Preface
1.2	General Description
1.3	Detailed Description
1.4	Application
1.5	Reference Standards
<u>2.0</u>	<u>Commercial Information</u>
2.1	Contact Details
2.2	Commercial Conditions
2.3	Warranty Information
2.4	Repair Arrangements
<u>3.0</u>	<u>Safety</u>
3.1	Warnings
3.2	Personal Protective Equipment
<u>4.0</u>	<u>Insulating Liquid</u>
4.1	Warning of Liquid Type
4.2	Liquid Level Check
4.3	Refill Arrangements
4.4	Sampling Valve
4.5	Spill Management
4.6	Environmental Credentials
<u>5.0</u>	<u>Earthing Arrangements</u>
5.1	Screen
5.2	Core
5.3	Neutral
5.4	External Earth Pads
<u>6.0</u>	<u>Terminations</u>
6.1	H.V. Connection Details
6.2	L.V. Connection Details
6.3	Auxiliary Wiring
<u>7.0</u>	<u>Delivery</u>
7.1	Delivery Details

<u>8.0</u>	<u>Installation</u>
8.1	Installation Introduction
8.2	Method of Dispatch
8.3	Examination Upon Arrival
8.4	Handling
8.5	Storage
8.6	Location
8.7	Foundation & Connections
<u>9.0</u>	<u>Commissioning</u>
9.1	General
9.2	Tap Changer
9.3	Equipment Pre-Commissioning Checks
9.4	Midel Sample
<u>10.0</u>	<u>Maintenance</u>
10.1	Unit Isolation
10.2	Oil Sampling
10.3	Pressure Relief Device
10.4	Desiccant Breather
10.5	Recommended Spares
10.6	Enclosure Inspection
10.7	Disposal
10.8	Torque Settings
<u>11.0</u>	<u>List of Drawings</u>
11.1	Outline & General Arrangement
11.2	Rating & Diagram Plate
11.3	Auxiliary Wiring Diagram
<u>12.0</u>	<u>Fixtures & Fittings</u>
12.1	Cooling Liquid
12.2	Bushings
12.3	Fuse Switch
12.4	Pressure Relief Device
12.5	Dehydrating Breather

SECTION
1

DESCRIPTION



1.1 Preface

This installation and maintenance manual has been written to assist the user with proper procedure when handling, installing, operating and maintaining the equipment. All the safety warnings and instructions in this book must be followed to prevent injury to personnel.

1.2 General Description

The transformer manufactured by **iST POWER Ltd** is supplied as follows: An auxiliary self-bunded, 3-Phase transformer, suitable for the outdoors, cooled with Midel 7131, for a 33000V 50Hz 3-Phase supply. The secondary voltage is 433V 3-Phase.

Type	Midel cooled, double wound auxiliary transformer in a self-bunded ground mounted tank.
Cooling	KNAN (Midel 7131) to IEC 61099
Continuous Rating	70 kVA
Rated Input Voltage	33000 V
Rated Output Voltage	433 V
Rated Input Current	1.22 A
Rated Output Current	93.36 A
Impedance	4.7 % (The measured value on test is stamped on the rating and diagram plate).
Basic Insulation Level	70 kV (RMS) 170 kV (Peak)
Frequency	50 Hz
Vector Group	Dyn11
Phases	3

Input Termination	35kV 800A Cooper 700 Series Bushings
	OR
	36kV 1250A ANSI 386 Oil Bushings Euromold Series 775S1 Type E
Output Termination	4 Pole 160A Socomec Fuse Switch Fitted with 100A Fuse Links
	OR
	Schneider Moulded Circuit Breaker (MCCB)
Fittings	Rating and Diagram Plate Earthing Terminal Off Circuit Tap Selector Handle Pressure Relief Device Envirogel Breather Re-connection Links Auxiliary Wiring Marshalling Box Lifting Lugs Jacking Lugs Liquid Drain Valve Common Skid Base
Weight of Core and Coils	620 kg
Liquid Quantity	370 Litres
Total Weight	2000 kg
	Specification IEC 60076

1.3 Detailed Description

The transformer is Midel 7131 immersed, naturally cooled and contained in a welded stainless steel tank that is installed within an IP23 ventilated cooling enclosure with integral full capacity bund facility.

The transformer core is of cruciform cross section, built up from cold rolled grain oriented low loss steel laminations with interleaved and mitred joints.

The wound leg is clamped by wedges inserted between the core and the inside secondary coil insulation. The yokes are clamped by folded steel and wooden clamping frames with end clamp bolts. The yoke clamps also serve to clamp the winding assemblies axially by means of tie rods, the top clamp position being adjustable for this purpose.

The core is insulated from the clamping framework and is earthed at one point. This earth point is taken to an external earth boss via an insulated bushing and removable link. The link is removable for test purposes.

The secondary coils are placed next to the core and are layer wound spiral windings formed from paper covered rectangular copper strips wound over circular formers.

A copper foil screen is wound over the secondary winding, and taken to a bushing located in the tank wall, and earthed to an external boss via a removable link. The link is removable for test purposes.

The primary coils are layer wound spiral windings formed from polyester covered round copper wire wound over the primary to secondary insulation.

The assembled core and windings are thoroughly dried out in a forced air circulation oven, the windings carefully matched for length and then clamped tightly between top and bottom frames by means of the tie rods.

When assembled into the internal tank the core and winding assembly is impregnated under full vacuum with Midel at 80°C.

The externally operated off-circuit tapping switch for the primary winding has its operating hand-wheel, suitable for padlocking, mounted behind the Auxiliary Equipment cover on the external tank. The handle of the switch has the facility to be padlocked.

**THIS SWITCH IS NOT SUITABLE FOR OPERATION WITH THE TRANSFORMER ENERGISED.
ENSURE THAT THE TRANSFORMER IS ISOLATED BEFORE OPERATING THE OFF-CIRCUIT TAPPING SWITCH.**

The expansion space over the transformer in the Midel filled tank vents to atmosphere through a desiccant breather. This requires regular inspection as detailed in Section 10.4.

The transformer is fitted with excess pressure relief device on the internal Midel filled tank which will open on a build-up of pressure inside the tank due to an internal fault and thereby prevent tank rupture. A cover is fitted over the pressure relief device to vent hot Midel fluid into the integral bund. An alarm switch is fitted and is wired out to a separate stainless steel marshalling box mounted behind the Auxiliary Equipment cover. In the event of an incident that causes the P.R.D. to operate, there is a mechanical indicator that is visible through a polycarbonate window in one end of the external tank.

The transformer is fitted with a liquid level gauge mounted on the end of the internal Midel filled tank. The gauge is fitted with a switch to provide an alarm signal on falling liquid level. The switch is wired out to the marshalling box. The gauge is visible through a clear polycarbonate window in one end of the external tank.

The marshalling box contains ten spring-loaded terminals mounted on a din rail. The box is mounted behind the Auxiliary Equipment cover in the external tank. The marshalling box is suitable for padlocking.

1.4 Application

This manual states the requirements for 11, 22 and 33kV Oil/Synthetic Liquid filled transformers up to 500kVA for dc traction substations as detailed in Network Rail specification NR/SP/ELP/21020.

1.5 Reference Standards

NR/SP/ELP/21028	Network Rail Line specification for auxiliary wiring of electrical distribution equipment
RT/E/S/21033	Network Rail Line specification for the welding of transformer tanks and conservators during manufacture.
IEC 60076	Power transformers
IEC 60296	Fluids for electro technical applications, Unused mineral insulating Oils for transformers and switchgear
IEC 61099	Insulating liquids. Specification for unused synthetic organic esters for electrical purposes
IEC 60529	Degree of protection provided by enclosures (IP Code)
IEC 60269	Low voltage fuses General requirements
IEC 60439	Low-voltage switchgear and control gear assemblies. Type-tested and partially type-tested assemblies

SECTION
2

COMMERCIAL
INFORMATION



2.1 Contact Details

Leicester Office
iST POWER Ltd
64-66 Percy Road
Leicester
LE2 8FN
Tel: 0116 483 3321

Manchester Office
iST POWER Ltd
Sharston Industrial Estate
Longley Lane
Wythenshawe
Manchester
M22 4RU
Tel: 0161 428 9507

2.2 Commercial Conditions

Please contact **iST POWER Ltd** on the contact details above.

2.3 Warranty Information

Please contact **iST POWER Ltd** on the contact details above.

2.4 Repair Arrangements

For all repair arrangements, please contact **iST POWER Ltd** on the contact details above.

SECTION
3

SAFETY



3.1 Warnings

The externally operated off-circuit tapping switch for the primary winding has its operating hand-wheel, suitable for padlocking, mounted behind the Auxiliary Equipment cover on the external tank.

THIS SWITCH IS NOT SUITABLE FOR OPERATION WITH THE TRANSFORMER ENERGISED.

ENSURE THAT THE TRANSFORMER IS ISOLATED BEFORE OPERATING THE OFF-CIRCUIT TAPPING SWITCH.

The transformer is delivered with the breather pipe capped. This cap must be removed and replaced with the desiccant breather supplied with the transformer.

The transformer breather is shipped as a loose item with the transformer. This will be attached to the outside of the transformer or be inside the L.V. switch box. There will also be a copy of the fitting instructions.

Refer to Section 8.3 for more information.

Transformer is filled with Midel 7131 to IEC 61099 only.
Refer to Section 12.1 for the manufacturer data sheet.

3.2 Personal Protective Equipment


All P.P.E. should follow the rules and regulations for working for Network Rail.

As a minimum this should include:

- Safety Hat/Helmet
- Safety Boots
- High Visibility Overalls (Trousers & Top)
- Safety Goggles
- Gloves

SECTION
4

INSULATING
LIQUID

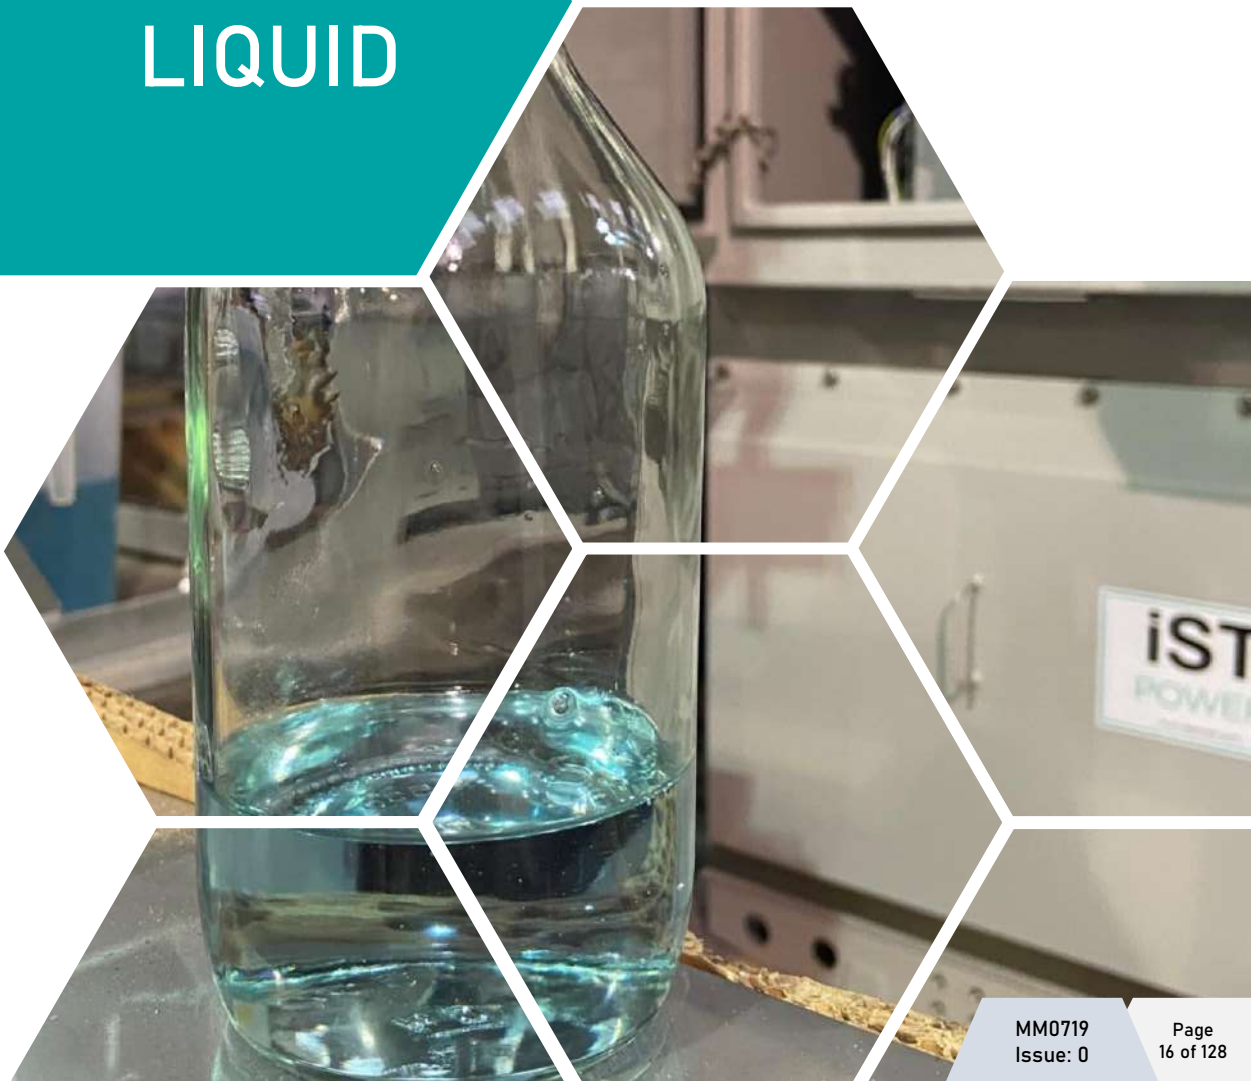

4.1 **Warning of Liquid Type**

The insulating liquid is Midel 7131 synthetic ester classified non-hazardous. See Section 12.1 for the manufacturer data sheet.

4.2 **Liquid Level Check**

The liquid level is indicated on the level gauge at the end of the conservator tank. The level indicated will depend on the ambient temperature and the operating temperature of the transformer.

The transformer is tested for leaks before it leaves the factory so if there is any drop in the liquid level the transformer should be thoroughly inspected for leaks.

- 1) The liquid level gauge is located behind a polycarbonate window on the right-hand side of the transformer. See DWG.014571 – ITEM.08. No access into the transformer enclosure is required.
- 2) The gauge is marked at -20°C, +20°C and + 85°C. Although the gauge markings are in °C, it is not a temperature gauge.
- 3) If the transformer is switched OFF and cold, the gauge will read at a level corresponding to the ambient temperature.
- 4) If the transformer is switched ON, the gauge will read at a level corresponding to the transformer oil temperature.

4.3 **Refill Arrangements**

Topping up of the Midel is done through the 3/4" BSP plug on the top of the conservator. This should only be carried out in good weather conditions or when the transformer can be sufficiently protected against water and debris contamination. Any work must be carried out in compliance with Network Rail practices.

- 1) Remove the cap from the filler socket. Ensure that no debris can fall inside.
- 2) Position a clean funnel in the filler.
- 3) Using only new Midel from a sealed container add fluid until the level is correct.
- 4) Remove the funnel from the filler taking care not to spill fluid.
- 5) Clean the screw threads on the filler socket and filler cap.
- 6) Apply PTFE to the filler socket threads, screw on and fully tighten the cap.
- 7) Wipe clean the transformer to remove any spilt Midel.

4.4 Sampling Valve

The sampling frequency is covered in Section 10.2.
The sampling procedure is outlined below.

Liquid samples should only be taken by experienced operators. Not using the correct sampling techniques can lead to false readings.

- 1) The sampling valve is located on the LV side, behind the Marshalling Box door. See DWG.014571 – ITEM.11.
- 2) Remove the drain valve locking pin.
- 3) Fit a clean rubber hose to the 1/4" hose tail.
- 4) Position the hose into a clean container, slowly open the drain valve and allow approximately 1 litre of Midel fluid to flush the valve and pipe. Do not allow the hose to become contaminated.
- 5) Place the hose into the neck of a clean oil sample bottle. Open the drain valve and fill with 1/3 litre of Midel. Close the valve.
- 6) Seal the bottle and agitate the sample to rinse the inside of the bottle.
- 7) Discard this Midel into a waste container.
- 8) Repeat steps 5 & 6. Ensure the bottle drains completely.
- 9) Place the tube into the neck of the bottle with the open end against the wall of the bottle.
- 10) Open the valve and fill the bottle up to the neck. Allow the fluid to flow smoothly and not create bubbles. Do not let the end of the tube to become submerged in the body of the fluid.
- 11) Close the valve and remove the tube from the bottle. Catch any fluid drips in a clean rag.
- 12) Seal the sample bottle and record the transformer serial number and oil temperature.
- 13) Remove the hose from the hose tail and carefully wipe any free liquid with a clean dry cloth.
- 14) Make sure that the transformer drain valve is fully closed and re-fit the locking pin.
- 15) Ensure that the work area is clean and that any waste liquid is disposed of carefully in an approved manner.
- 16) Job complete.

4.5 **Spill Management**

Personal precautions: Spilt product can constitute a slip hazard. Avoid contact with skin and eyes.

Environmental precautions: In the event of a large spillage, clean as thoroughly as possible and contact local authority. Avoid flushing into drains.

Cleaning procedures: Use an inert absorbent material (e.g. sand, oil absorbent granules, etc.) and place in labelled containers. Product and packaging must be disposed of in accordance with local and national regulations.

Refer to Section 12.1 for Midel 7131 manufacturer data sheet.

4.6 **Environmental Credentials**

Refer to Section 12.1 for Midel 7131 fluid to IEC 61099 data sheet.

SECTION
5

EARTHING
ARRANGEMENTS



5.1 **Screen**

The coil screens are internally wired to a bushing mounted on the side of the Midel filled tank. The bushing is then grounded to the tank via an earth braid taken to a welded boss inside the L.V. switch cabinet.

5.2 **Core**

The core earth is internally wired to a bushing mounted on the side the Midel filled tank. The bushing is then grounded to the tank via an earth braid taken to a welded boss inside the L.V. switch cabinet.

5.3 **Neutral**

The neutral of the Secondary (L.V.) side is grounded to the main transformer tank earth via a removable earth link arrangement located in the L.V. cabinet. This link can be removed to carry out relevant testing, but must be replaced prior to energisation of the transformer.

5.4 **External Earth Pads**

The main earthing points for the transformer are two earth pads located at the base of the transformer in diagonally opposite corners. Refer to DWG.014571 – ITEM.16 for details.

SECTION
6

TERMINATIONS



6.1 H.V. Connection Details

The primary bushings are Separable Connector suitable for either:

- (a) 35kV 800A Cooper 700 Series Bushings
Type 'E' facing with 5/8" UNC 2B thread to ANSI/IEEE 386.

or

- (b) 36kV 1250A Oil bushings Euromold (reference 775S1)
Type 'E' facing with 5/8" UNC 2B thread to ANSI/IEEE 386.

The bushing connectors are secured by the external tank which locks the connectors in place and conceals both the connectors and incoming cables.

Cable cleats are fitted below each bushing to support the H.V. incoming cables.

6.2 L.V. Connection Details

1kV 250A Bushings DT1/250 mounted inside the L.V. cabinet which then feed either: -

- (a) L.V. Fuse Switch Socomec 160A Fuse Switch
Ref: 3841-6015

or

- (b) Schneider Moulded Case Circuit Breaker (MCCB)

Access for incoming cable is via a metal gland plate fitted to the bottom of the L.V. cabinet.

6.3 Auxiliary Wiring

The auxiliary wiring for the P.R.D. and oil level gauge is XLPE/SWA/PVC cable and is terminated in the marshalling box. Each cable is ferruled and crimped at each end.

SECTION
7

DELIVERY



7.1 Delivery Details

The units are dispatched completely assembled, with the exception of the desiccant breather, which is found either in the L.V. cabinet or strapped to the outside of the tank

The transformer is suitable for HIAB off-loading to ground only.

Jacking points are also supplied for final positioning.

SECTION
8

INSTALLATION



8.1 Installation Introduction

These instructions are intended to give guidance and assistance in the installation and maintenance of the Midel filled 3-Phase power transformer.

8.2 Method of Dispatch

Every precaution is taken to ensure that the equipment will arrive at its destination in perfect condition.

The units are dispatched completely assembled, finished and tested on dedicated road transport.

8.3 Examination Upon Arrival

Immediately upon arrival the equipment should be thoroughly examined externally. Any damage should be reported at once to the Carrier and to **iST POWER Ltd** quoting the Advice Note details to enable a claim to be lodged with the responsible party. Any deficiencies of material should also be notified to the Carrier and to **iST POWER Ltd** immediately.

The Desiccant breather is shipped as a loose item with the transformer. This will be attached to the outside of the transformer or be inside the L.V. switch box. There will also be a copy of the fitting instructions.

The breather is fitted to the tank breather pipe located behind the Auxiliary Equipment cover. When opened the breather pipe will be seen on the left hand side.

To attach the breather, it is necessary to remove the $\frac{3}{4}$ " BSP cap from the end of the breather tube. During transport, a small quantity of oil will find its way into the breather tube. This must be allowed to drain before fitting the breather to prevent the breather material being poisoned. To prevent a spillage of oil, position a 1 litre container beneath the breather tube before removing the end cap. Dispose of any Midel in an approved manner.

Screw the breather onto the end of the breather pipe. The breather must be fitted in accordance with the manufacturers instruction leaflet. See Section 12.5 for the breather details and the fitting instruction leaflet.

8.4 **Handling**

When lifting the equipment use the four lifting points provided with the correct lifting slings through each lifting point. If a lifting beam is not used, the sling to load angle must not be less than 60°. Great care must be taken not to knock or damage the equipment.

The lifting weight of the complete unit is 2000kg.
Jacking lugs are provided on each side.

8.5 **Storage**

The unit should be stored indoors or in a covered area, until commissioned.

8.6 **Location**

As this equipment is a static unit the location is of course fixed. Care must be taken to protect the unit from severe environments i.e., pollution from active chemicals, hot air blasting unit or any elements not deemed normal. The unit is dispatched full of Midel to operating level for use outdoors with heavy duty paint finish.

8.7 **Foundation and Connections**

The equipment is must mounted on a suitable prepared plinth. Ensure that the plinth is flat and level. Details of Anti-Vibration Pads are relevant placement is outlined in DWG.014751.

The connection leads to the input and output should be taken through the entries provided by others and the connections fastened securely to the terminals.

Ensure that the leads are connected to the terminals marked as shown in rating and diagram drawings listed below.

Ensure that an efficient earth connection is made to the earth terminals on the tank.

SECTION
9

COMMISSIONING



3.1 General

Check the equipment for any obvious signs of damage, loose items and contamination by water or other substances. Site tests and checks are not carried out by **iST POWER Ltd**. Check the Transformer liquid level.

9.2 Tap Changer

Before the transformer is commissioned or connected to the supply, the off-circuit tapping switch should be padlocked in the selected position.

9.3 Equipment Pre-Commissioning Checks

The following electrical tests should be carried out on the equipment.

9.3.1 Ratio Measurement

Using a proprietary Transformer Ratiometer, check the transformer ratio. Compare the results with the values given in the test certificate.

9.3.2 Resistance Measurement

With the transformer isolated, measure the resistance of the windings. Compare with results in test certificate.

9.3.3 Insulation Resistance Measurement

With the transformer isolated the insulation resistance should be measured.

1. Measured with a 2500V Megger the following are minimum insulation resistance values.
 - a) Transformer Windings to Earth 200M Ω .
 - b) Primary Winding to Secondary Windings 500M Ω .
2. With a 500V Megger, check the L.V. wiring to earth. The minimum value of resistance should be 10M Ω .
3. Reconnect all leads.

9.4

Midel Sample

A Midel sample should be taken via sampling valve provided and as detailed in IEC 60475. See Section 4.4 for sampling procedure.

**ALL TESTING MUST BE CARRIED OUT BY A SUITABLY
QUALIFIED AND EXPERIENCED TEST ENGINEER.**

SECTION
10

MAINTENANCE
INSTRUCTIONS



10.1 Unit Isolation

MAINTENANCE MUST ONLY BE CARRIED OUT WHEN THE EQUIPMENT HAS BEEN TOTALLY ISOLATED. ISOLATE ALL SUPPLIES PRIOR TO WORKING ON THIS EQUIPMENT

The transformer has no inherent means of input isolation. The supply to the transformer of 33000V 3-Phase must therefore be isolated remotely and the terminals earthed down.

10.2 Oil Sampling

The insulating liquid is Midel 7131 (non-hazardous). Refer to Section 12.1 for the manufacturer data sheet. Midel samples should be taken via the sampling valve according to the attached schedule. The sampling procedure is outlined in Section 4.4.

Following commissioning Midel samples should be taken at the following intervals: -

- a) after 6 months
- b) after 12 months
- c) after 60 months
- d) thereafter every 5 years

The samples should have physical analysis, DGA, water content and breakdown strength measured and recorded for on-going monitoring. Any trend that indicates a deterioration of the transformer should be noted and the frequency of sampling increased as required.

After taking any Midel sample check that the liquid level is correct via the liquid level gauge. Taking a liquid sample will remove 2.5 - 3 litres of oil.

Note: Replace or top up the transformer with Midel 7131 to IEC 61099

10.3 Pressure Relief Device

The rating of the micro switch is such that no maintenance of the contacts will be required during the life of the transformer. However, it is advisable that the contacts be checked every 12 months for correct switching by manual operation of the switch only. Refer to Section 12.4 for more information.

10.4 Desiccant Breather

Desiccant breather charges must be checked on regular basis in accordance with the manufactures instructions supplied in this manual. We recommend that the condition of the gel should be checked as follows: -

- After 6 months
- After 12 months

After 12 months the period between inspections can be increased if operating experience indicates that this can be safely done.

Transformer
70 kVA

Breather Charge
Brownell Type R1

Changing the Dehydrating Breather:

- 1) Remove the padlock from the Auxiliary Equipment Door located on the left-hand side of the transformer.
- 2) Remove the two M6 dome head nuts and washer from the door retention studs and open the door.
- 3) The breather is located on the left-hand side of the auxiliary equipment compartment. (See Section 11.1: DWG.014571 – ITEM.9).
- 4) Using a 32mm open ended spanners loosen the breather.
- 5) When free, undo the breather by hand using only the top flange of the breather. Do not use the bottom flange.
- 6) Remove the breather from the transformer.
- 7) Clean the threads at the end of the breather pipe and apply fresh PTFE sealing tape.
- 8) Un-wrap the replacement breather.
- 9) Screw the breather onto the breather pipe by hand using the top flange. Do not use the bottom flange.
- 10) Tighten the breather using a 32mm open ended spanner to 35Nm.
- 11) Close the Auxiliary Equipment Door and fit the two M6 dome head nuts and washers.
- 12) Re-fit the padlock.
- 13) Job complete.

10.5 Recommended Spares

Due to the nature of the product there are very few items that will degrade during the lifespan of the transformer. The only item that will require replacement is the desiccant breather charge. The correct item for the transformer is listed below.

Other than the desiccant breather charge the only other items that may require replacement are the fuses in the fuse switch (if fitted). These will only require replacing if there has been an external fault that has caused them to fail. They are not part of the routine maintenance requirements.

10.6 Enclosure Inspection

As part of the maintenance regime (i.e. oil sampling, breather change), we would recommend that a visual inspection should be conducted of the overall transformer. This would include the paintwork condition, condition of fittings etc.

The oil level gauge should be checked for signs of an liquid level drop. In addition, the inside of the outer enclosure should also be visually assessed for oil leaks. This would be via the Drain Valve hatch (See Section 11.1: DWG.014571 – ITEM.10) and the Marshalling Box door (See Section 11.1: DWG.014571 – ITEM.5).

Contact **iST Power** if further assistance is required.

10.7 Disposal

Disposal of this equipment at the end of its operational life must be in accordance with the environmental legislation in force at the time of disposal.

The transformer is constructed in such a way that the different components can easily be recycled at the end of its life span. However, the components can only be recycled after the cooling liquid has been drained. The liquid should be drained and disposed of by a specialist waste contractor in accordance with local regulations.

NOTE **The transformer does not contain any PCBs, PCTs, PCBTs or asbestos material. Consider using the services of a specialist recycling company who have the capacity, skills and knowledge to recycle transformers.**

10.8

Torque Settings

Maximum tightening torque settings for threaded metric **Steel Grade 8.8** nut and bolts clamping on **6mm thick cork gasket** with lightly lubricated threads:

Bolt Size	Approximate Torque (Nm)
M5	3
M6	5
M8	12
M10	37
M12	45

Ensure all **Brass** nuts are tightened to the following torque settings:


Bolt Size	Approximate Torque (Nm)
M10	14
M12	20

The fixing assembly between the Inner Tank and Outer Bund is made up of a series of gaskets between an M12 nut and bolt. Maximum tightening torque settings for threaded metric **Steel Grade 8.8** with lightly lubricated threads:

Bolt Size	Approximate Torque (Nm)
M12	25

SECTION
11

LIST OF
DRAWINGS

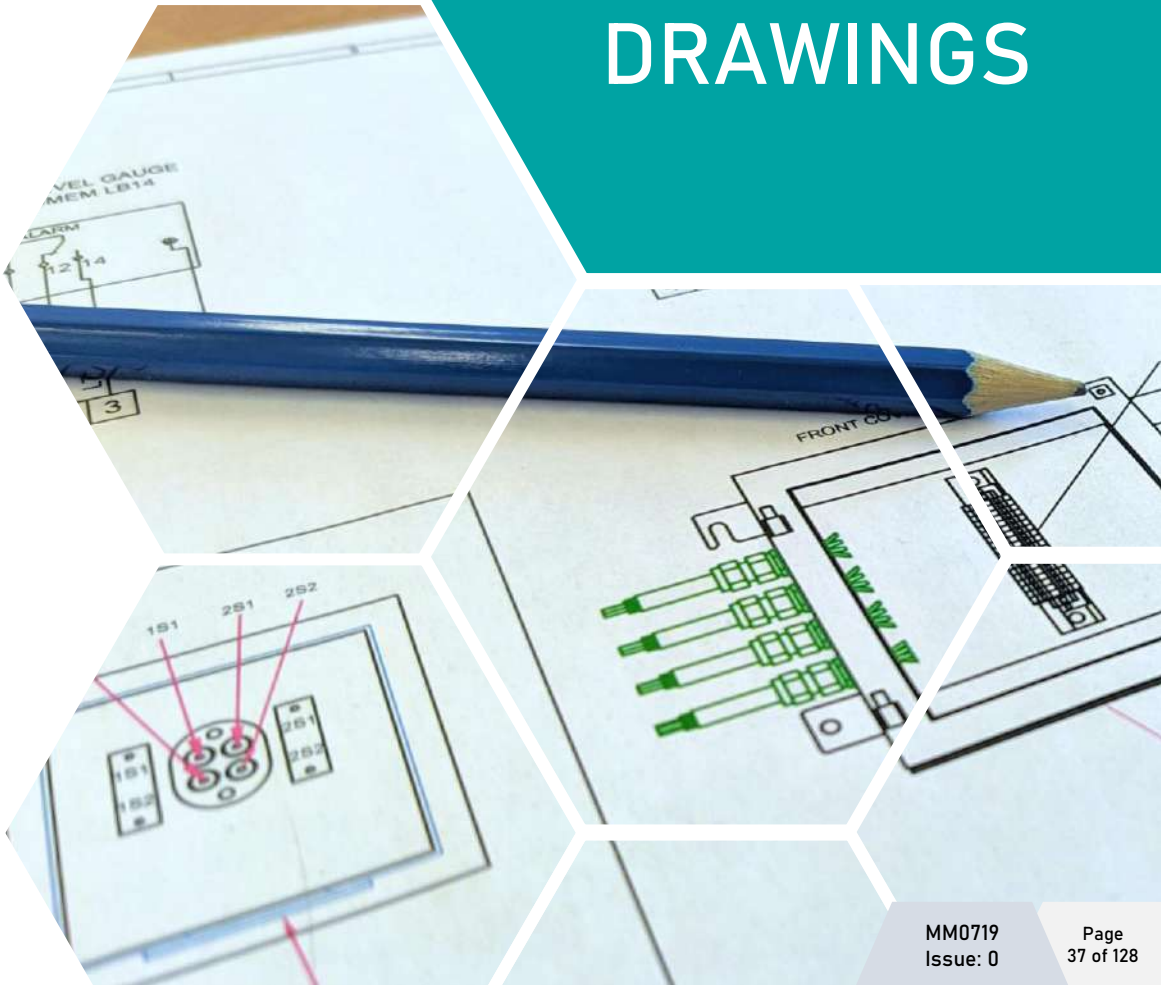

11.1 **Outline & General Arrangement**

014571


11.2 **Rating & Diagram Plate**

014572


11.3 **Auxiliary Wiring Diagram**

014576

DO NOT SCALE - IF IN DOUBT ASK





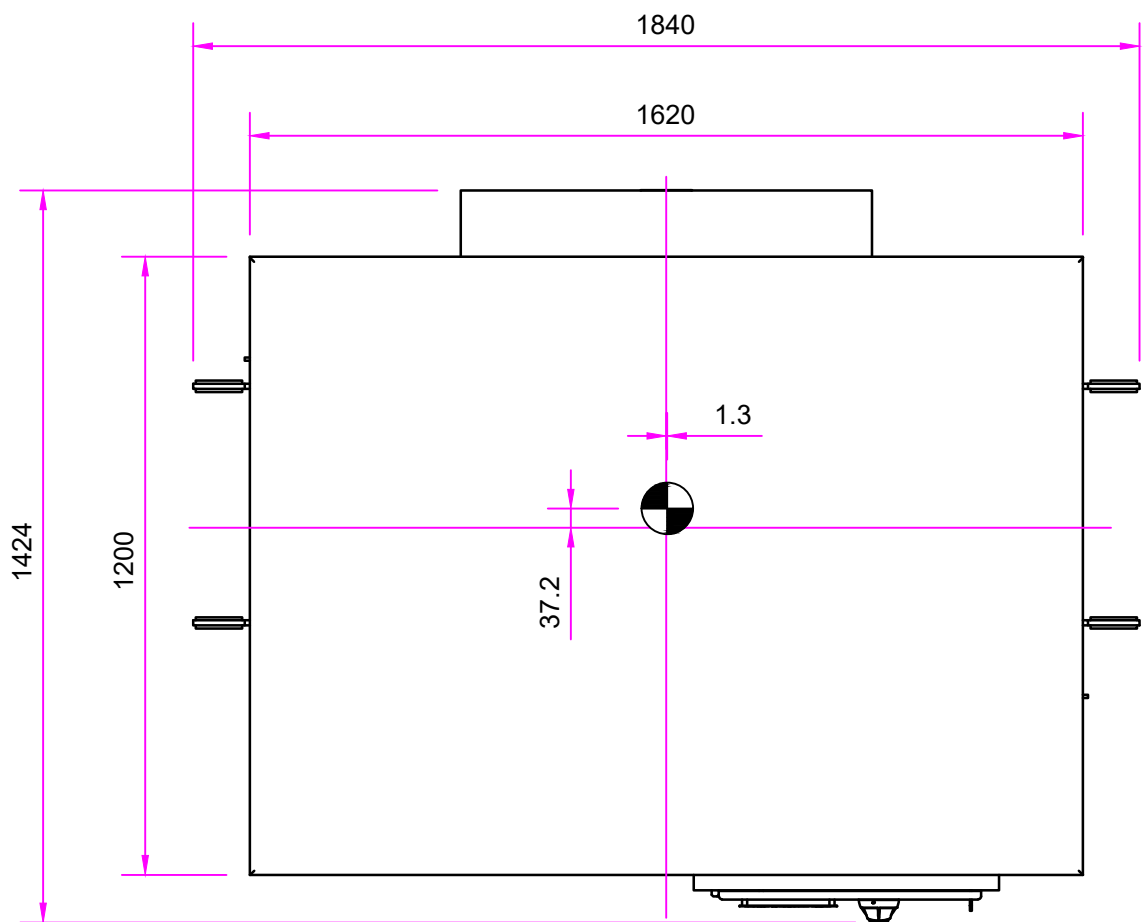


FINAL COLOUR:
SEMI-GLOSS LIGHT GREY (AGATE GREY) RAL7038

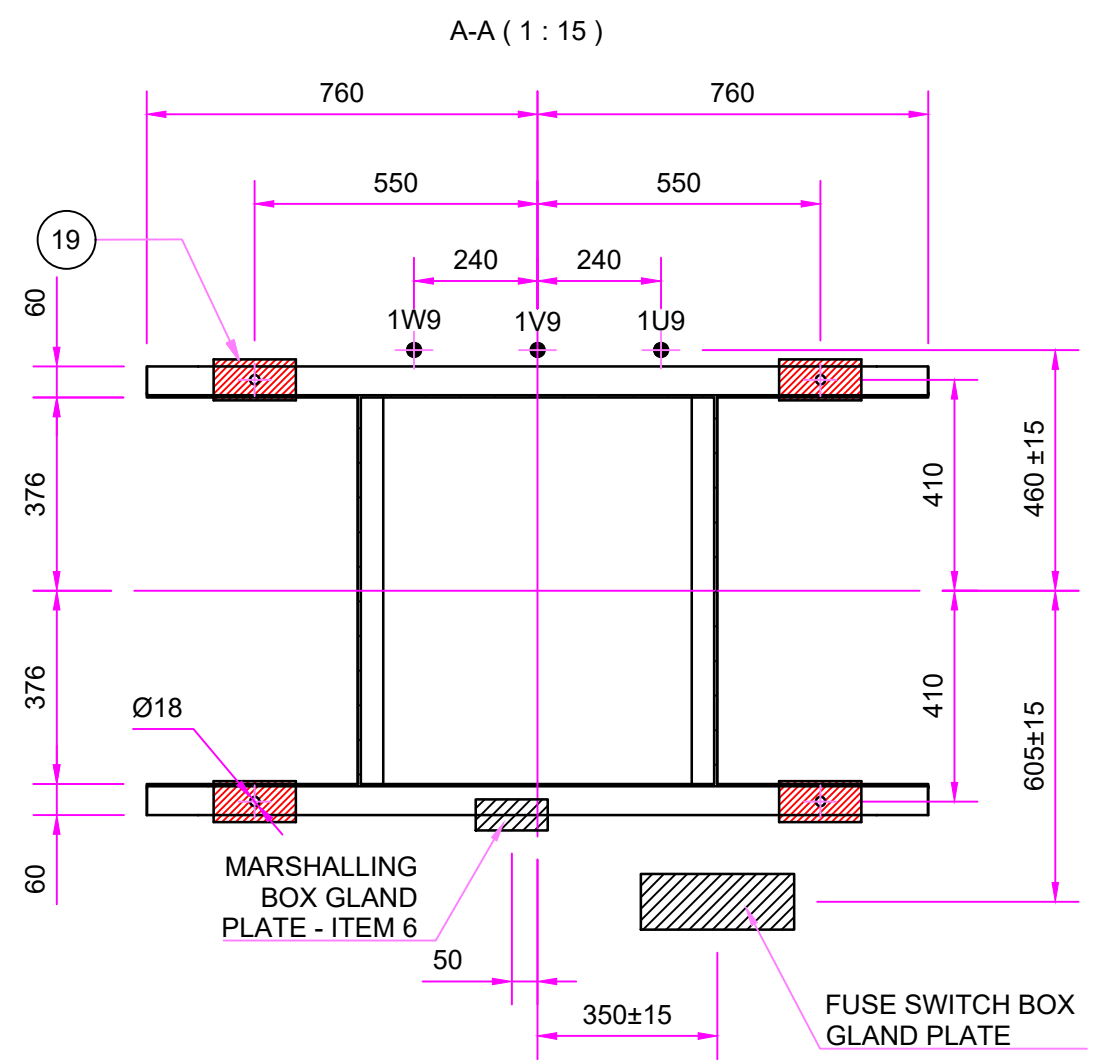

TRANSFORMER RATING		ESTIMATED WEIGHTS	
kVA	70	CORE AND COILS	620 KG
VOLTS	33000 / 433	COOLING LIQUID - MIDEL	370 LT / 360 KG
AMPS	1.22 / 93.36	TOTAL WEIGHT	2000 KG
CONNECTION	Dyn11		

70kVA 33kV 433V AUXILIARY TRANSFORMER - SELF BUNDED	
ITEM	DESCRIPTION
1	36kV 800 AMP TYPE E BUSHING (700 SERIES) - 5/8" UNC THREAD
2	HV CABLE SCREEN EARTH BAR c/w M10 TERMINATIONS
3	160 AMP 4 POLE FUSE SWITCH c/w 100 AMP FUSE LINKS & BOLTED NEUTRAL
4	OFF CIRCUIT TAP CHANGER
5	AUXILIARY WIRING MARSHALLING BOX
6	AUXILIARY WIRING MARSHALLING BOX ACCESS GLAND PLATE
7	P.R.D. c/w OIL DIRECTION DUCT (BEHIND POLYCARBONATE WINDOW)
8	MAGNETIC OIL LEVEL GAUGE (BEHIND POLYCARBONATE WINDOW)
9	SILICA GEL BREATHER (BEHIND POLYCARBONATE WINDOW)
10	DRAIN VALVE - DN25 (BEHIND POLYCARBONATE WINDOW)
11	SAMPLING VALVE
12	MIDEL FILLING PORT
13	THERMOMETER WELL
14	SEPARABLE CONNECTORS PARKING BAY
15	CABLE SUPPORT CHANNEL
16	EARTH PAD c/w 14DIA HOLES (2 PLACES)
17	MAIN LIFTER c/w 40 DIA HOLES
18	RATING & DIAGRAM PLATE (MOUNTED ON LV FUSE SWITCH DOOR)
19	ANTI-VIBRATION PAD

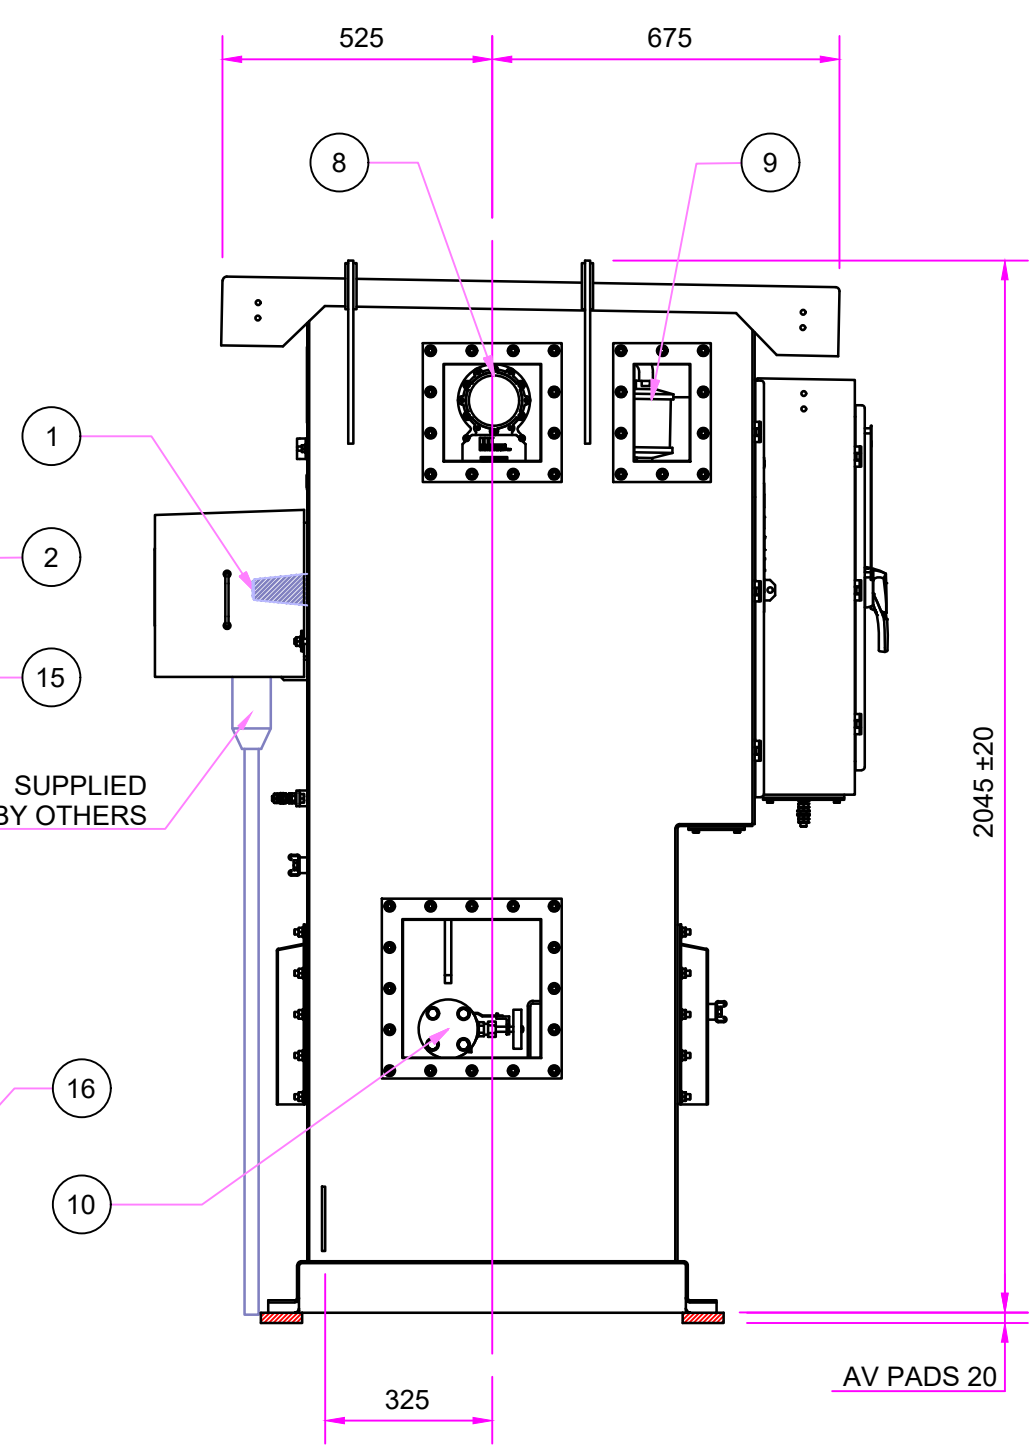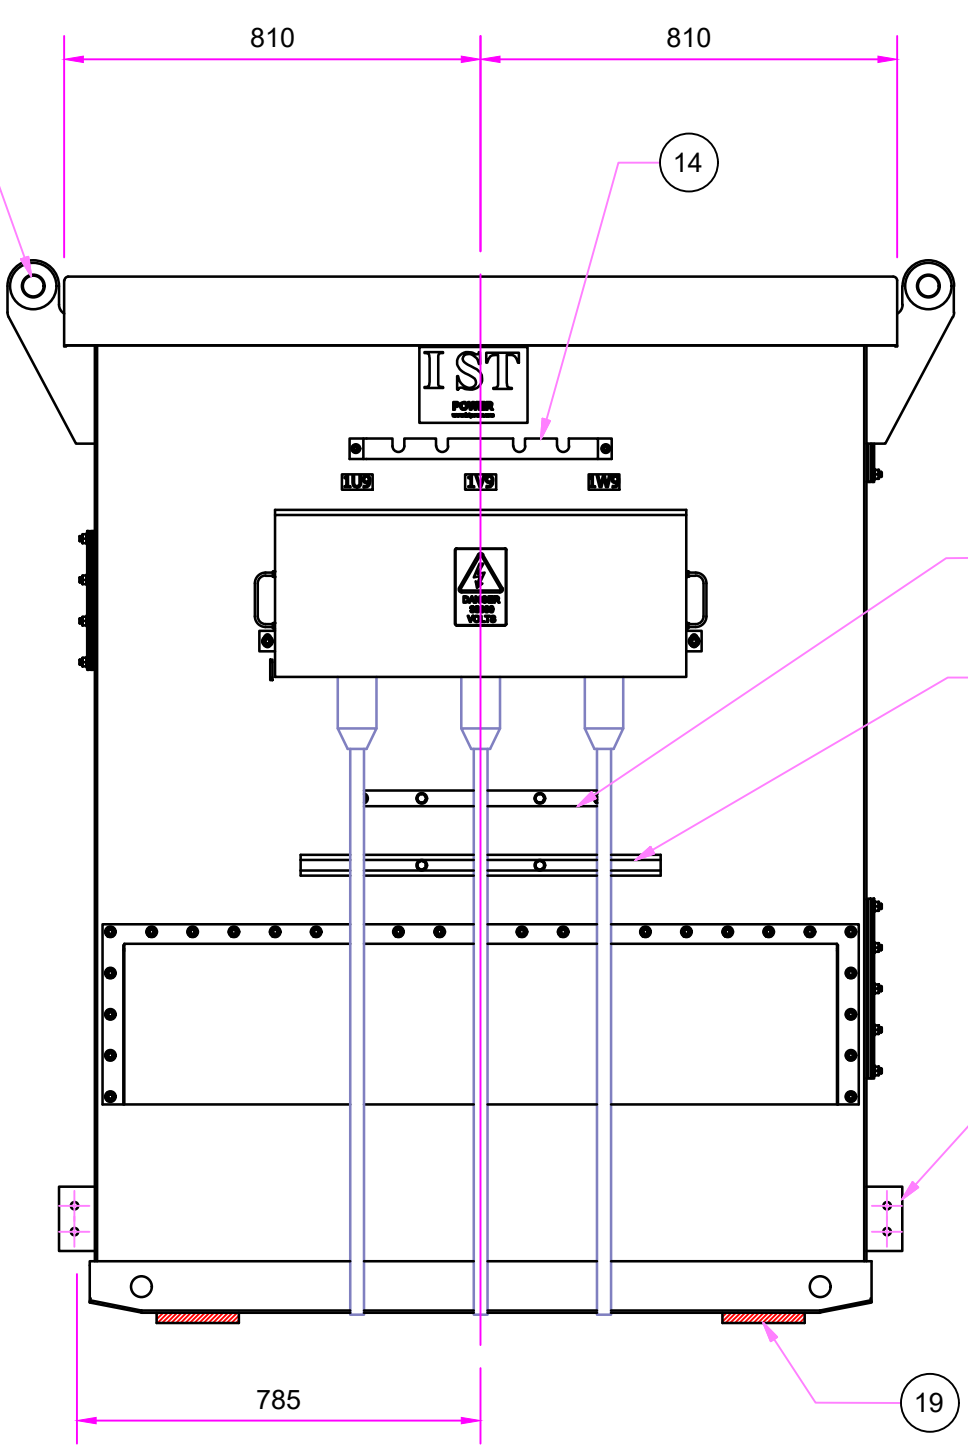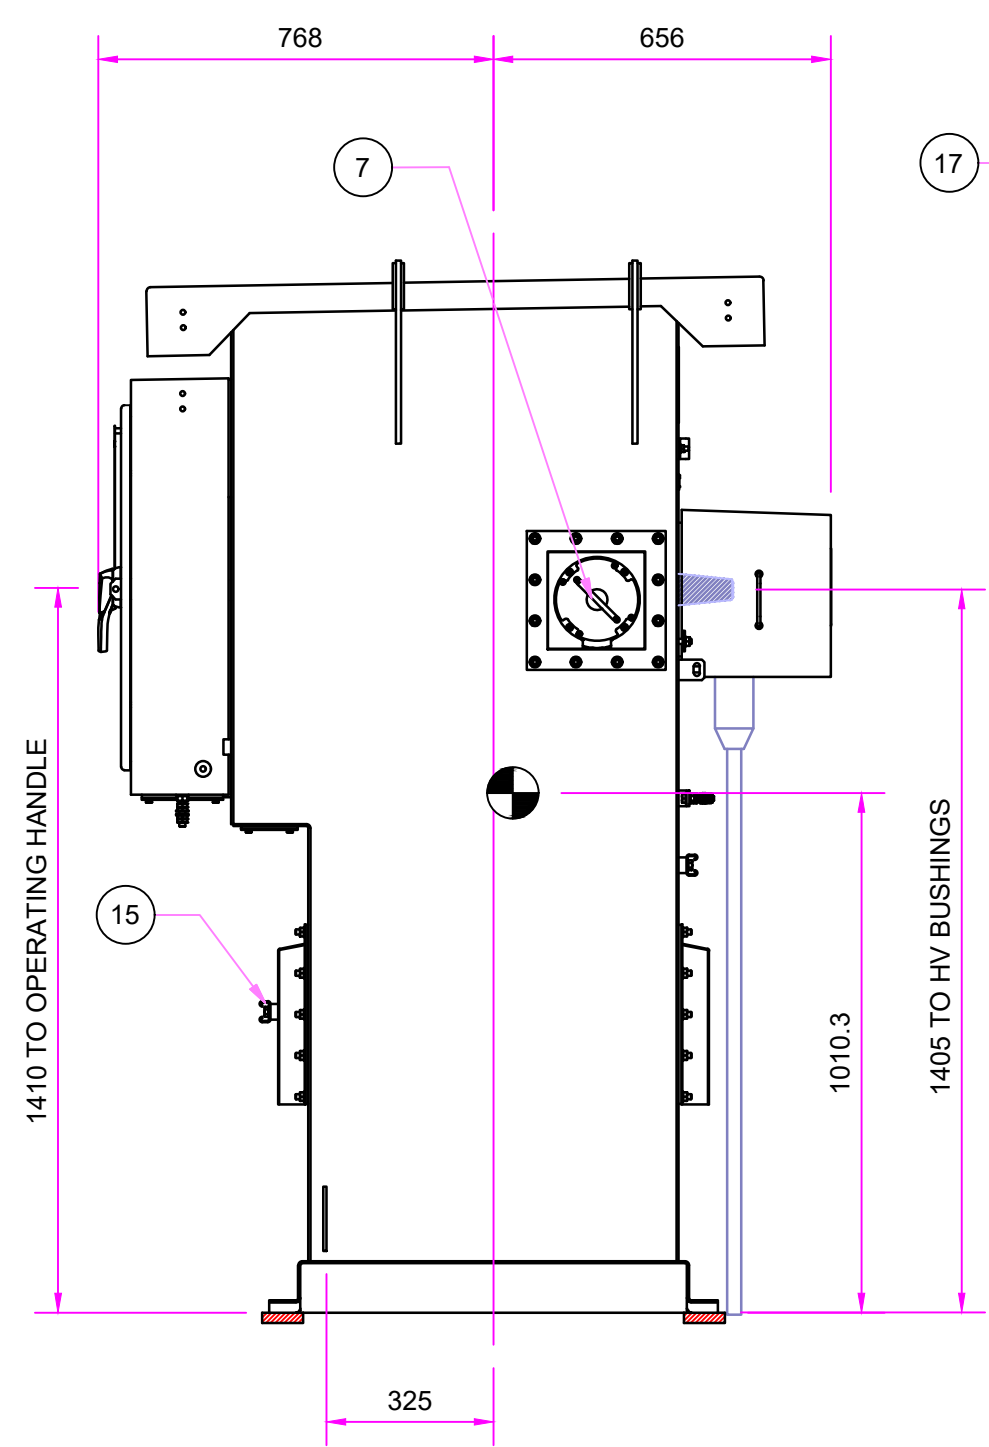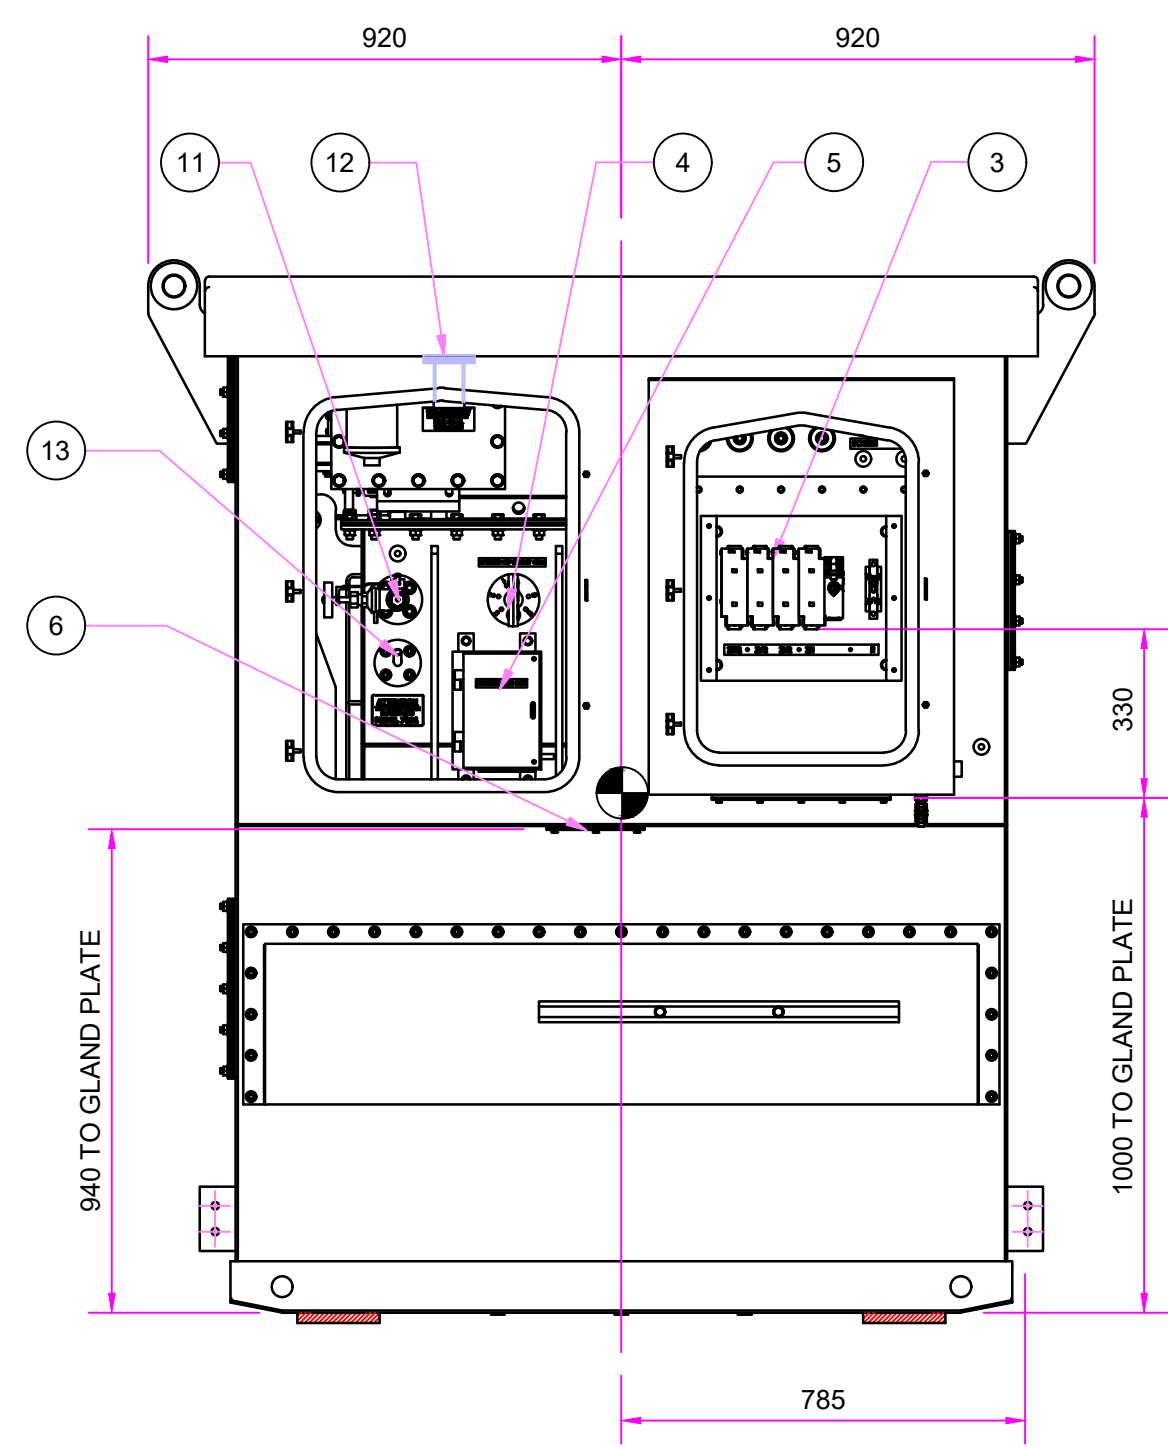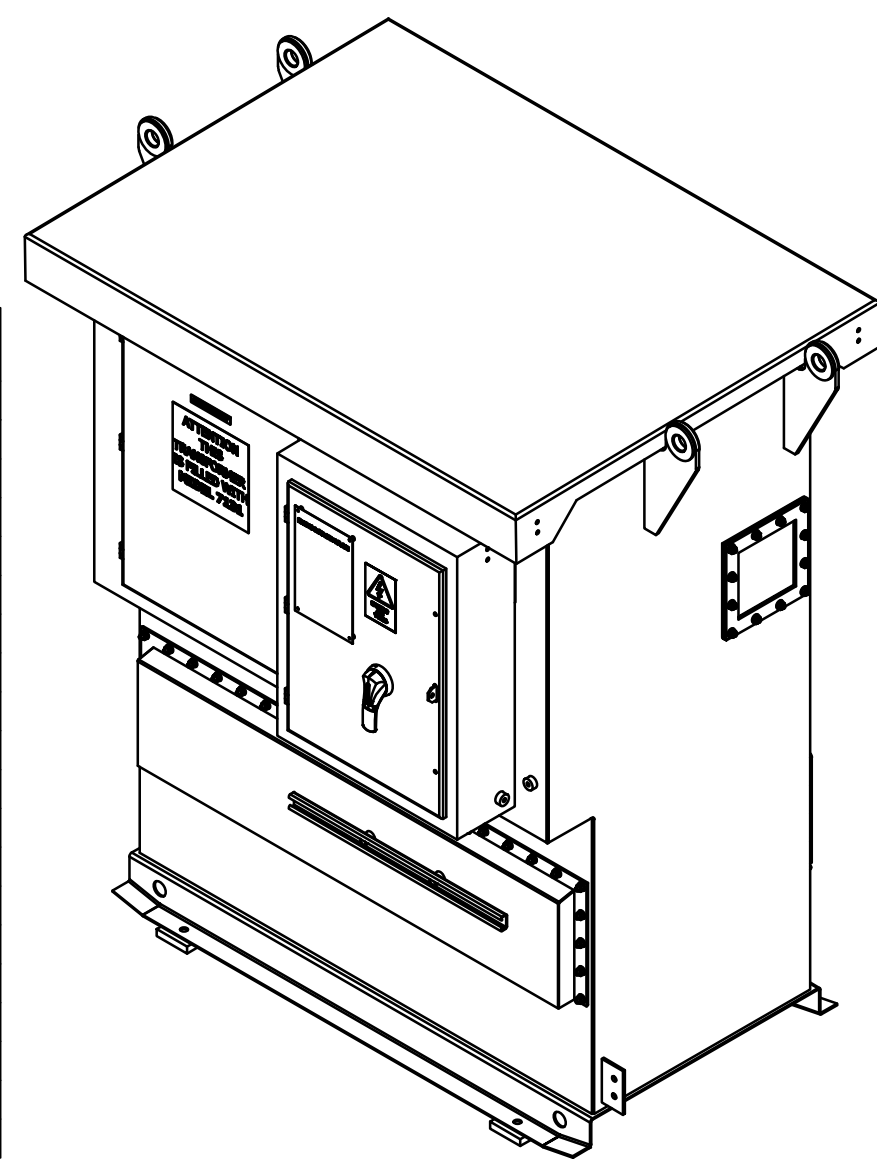

ISSUE	BY	ECN	DESCRIPTION	DATE
0			NEW	
1				
2				
3				
4				
5				
6				
7				
8				

WHERE USED 0105449

TOLERANCES UNLESS OTHERWISE STATED : NO DECIMAL PLACE ±1mm. ONE DECIMAL PLACE ±0.4mm ANGULAR ±1°

A2 840 x 594

TITLE
OUTLINE OF 70kVA 33kV 433V Dyn11
SELF BUNDED AUXILIARY TRANSFORMER

THE INFORMATION, DATA, AND DRAWINGS EMBODIED IN THIS DOCUMENT ARE STRICTLY CONFIDENTIAL, AND ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT THE PRIOR WRITTEN CONSENT OF IST Power Ltd.
ALL RIGHTS RESERVED.

IST POWER
IST Power Ltd
LEICESTER : 0116 283 3321
MANCHESTER : 0161 428 9507

ALL INFORMATION, ILLUSTRATIONS, AND DATA CONTAINED HEREIN COPYRIGHT © IST Power Ltd
ALL RIGHTS RESERVED.


DRAWN BY MK	CHECKED	SCALE 1:15	DATE 26/04/2022
----------------	---------	---------------	--------------------

DRAWING No. 014571

SHEET No. 1

IF IN DOUBT ASK

5x45° CHAMFER

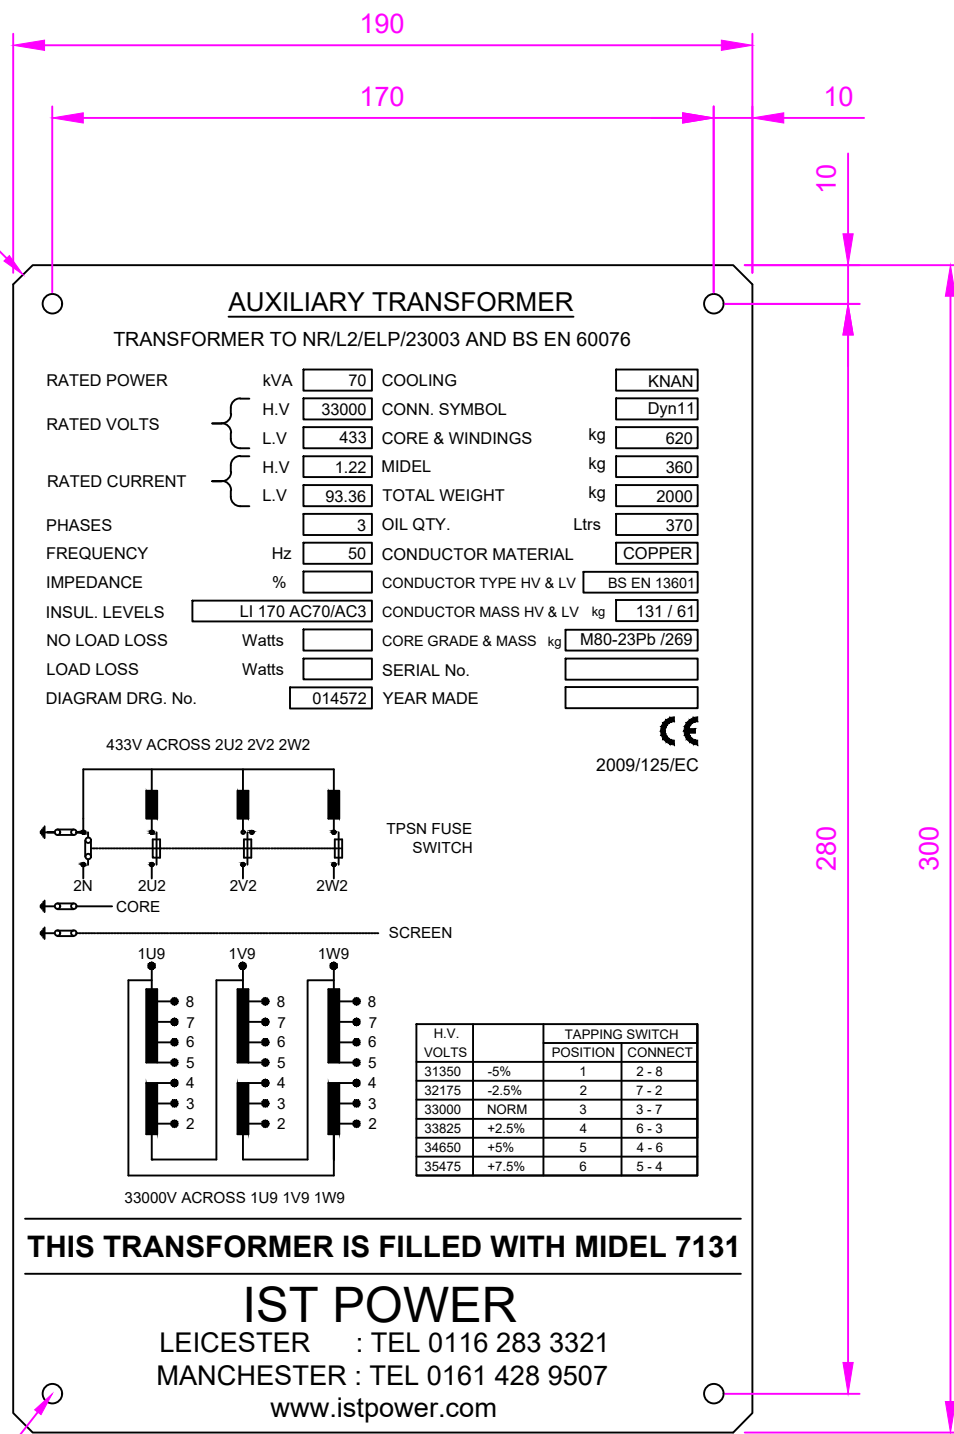

4 - Ø5 HOLES

MATERIAL : 0.8THK STAINLESS STEEL GRADE 316

NOTE : REMOVE ALL SHARP EDGES AND CORNERS

ENGRAVE OR SCREEN PRINT.
TO BE SUITABLE FOR HARSH ENVIRONMENT.

IMPEDANCE, NO LOAD LOSSES, LOAD LOSSES,
SERIAL NUMBER & YEAR OF MANUFACTURE ARE
TO BE ENGRAVED AFTER TEST.
ALL LETTERS TO BE BLACK

WHERE USED 0105449

TOLERANCES UNLESS OTHERWISE STATED : NO DECIMAL PLACE ±1mm ONE DECIMAL PLACE ±0.4mm ANGULAR ±1°

A3 297 X 420

ISSUE	BY	ECN	DESCRIPTION	DATE
0			NEW	

TITLE

RATING & DIAGRAM PLATE

THE INFORMATION, DATA, AND DRAWINGS EMBODIED IN THIS DOCUMENT ARE STRICTLY CONFIDENTIAL, AND ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT THE PRIOR WRITTEN CONSENT OF IST Power Ltd


IST POWER
IST Power Ltd.
LEICESTER : 0116 2833321
MANCHESTER : 0161 428 9507

ALL INFORMATION, ILLUSTRATIONS, AND DATA CONTAINED HEREIN COPYRIGHT © IST Power Ltd ALL RIGHTS RESERVED.


DRAWN MK	CHECKED PWJ	SCALE 1:2	DATE 26/04/2022
DRAWING No. 014572			SHEET No. 1

IF IN DOUBT ASK

PRESSURE RELIEF DEVICE

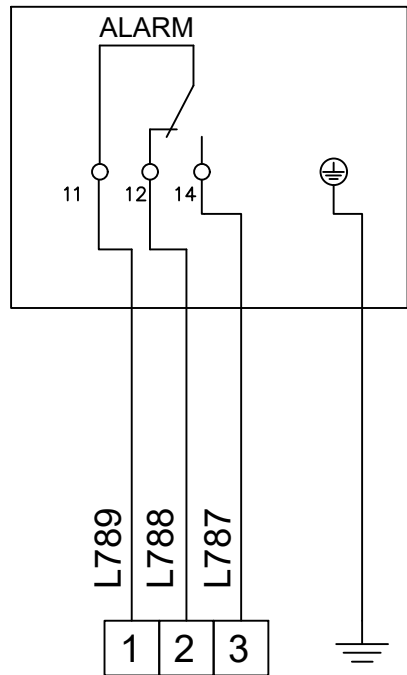


MAGNETIC OIL LEVEL GAUGE

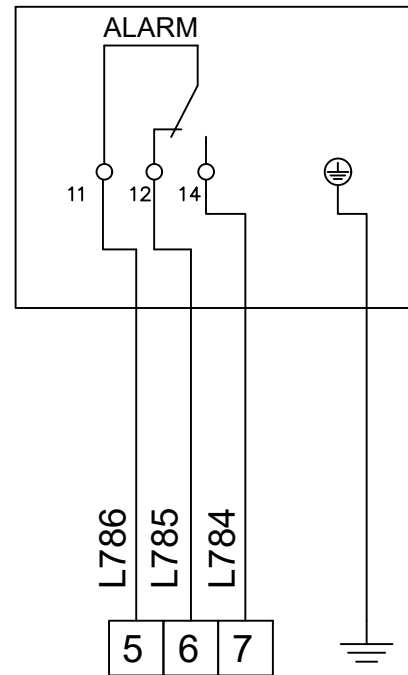

4 SPARE

8 SPARE
9 SPARE
10 SPARE

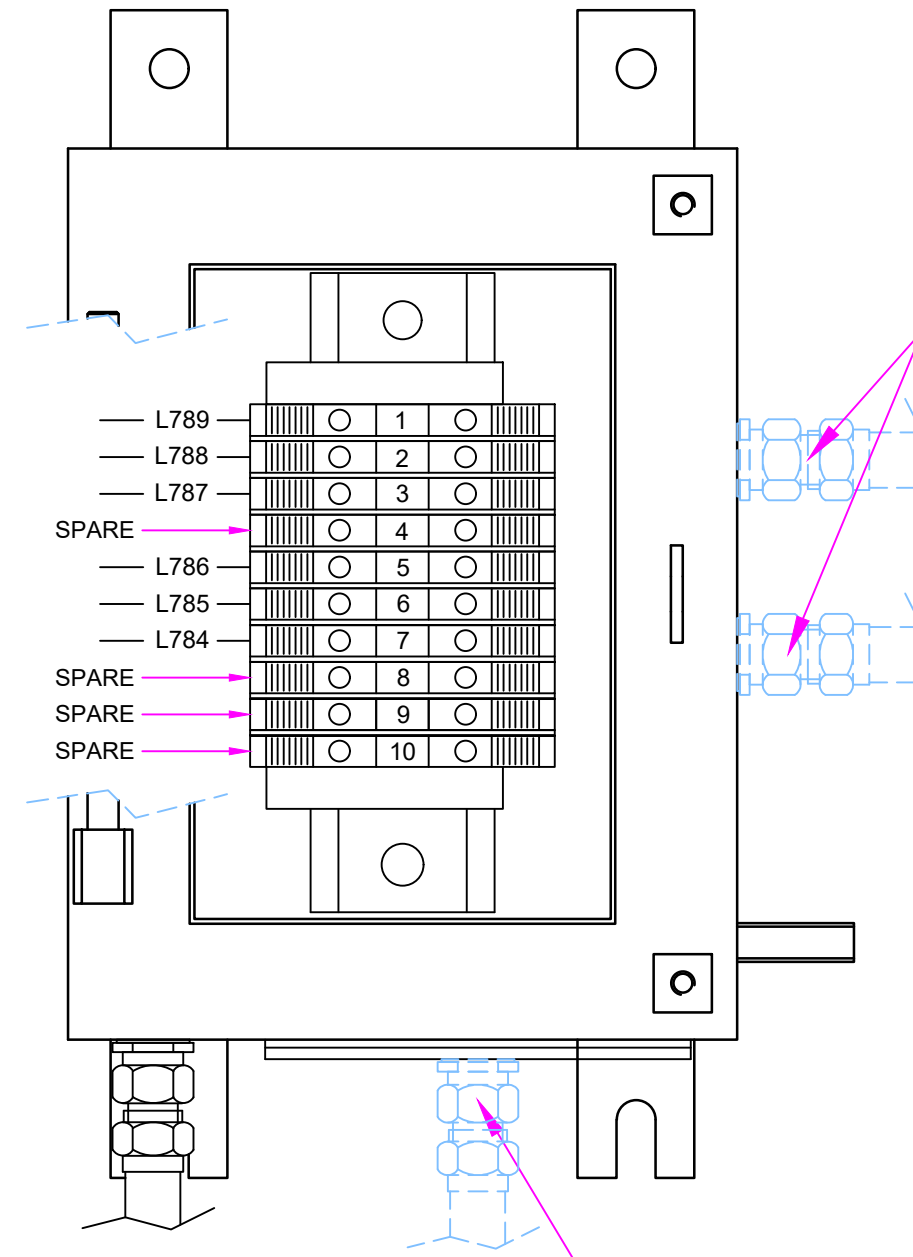

SUGGESTED PROVISION FOR CUSTOMERS CABLE GLANDS

ALTERNATIVE PROVISION FOR CUSTOMERS CABLE GLANDS


2.5mmSQ 4 CORE PVC SWA CABLE
TERMINAL BLOCKS: KLIPPON TYPE WDU 10/SL

TERMINAL BLOCKS TO BE NUMBERED
WIRES TERMINATED WITH HOOKED BLADE TYPE CRIMPS

INSTRUMENT	CONTACTS	OPERATION	COMMENTS
PRESSURE RELIEF DEVICE	1 N.O. 1 N.C.	CHANGE OVER ON RELEASE	RELEASE AT 5.8 P.S.I.(40kPa)
OIL LEVEL GAUGE	1 N.O. 1 N.C.	CHANGE OVER ON MIN OIL LEVEL	

WHERE USED 0105449

TOLERANCES UNLESS OTHERWISE STATED : NO DECIMAL PLACE ±1mm ONE DECIMAL PLACE ±0.4mm ANGULAR ±1°



A3 297 X 420

ISSUE	BY	ECN	DESCRIPTION	DATE
0			NEW	

TITLE
AUXILIARY WIRING DIAGRAM

THE INFORMATION, DATA, AND DRAWINGS EMBODIED IN THIS DOCUMENT ARE STRICTLY CONFIDENTIAL, AND ARE SUPPLIED WITH THE UNDERSTANDING THAT THEY WILL NOT BE DISCLOSED TO THIRD PARTIES WITHOUT THE PRIOR WRITTEN CONSENT OF IST Power Ltd


IST POWER
IST Power Ltd.
LEICESTER : 0116 2833321
MANCHESTER : 0161 428 9507
ALL INFORMATION, ILLUSTRATIONS, AND DATA CONTAINED HEREIN COPYRIGHT © IST Power Ltd ALL RIGHTS RESERVED.

DRAWN MK	CHECKED PWJ	SCALE NTS	DATE 26/04/2022
DRAWING No. 014576			SHEET No. 1

COOLING LIQUID: MIDEL 7131

(PRODUCT DATA - 18 PAGES)

SECTION
12.1

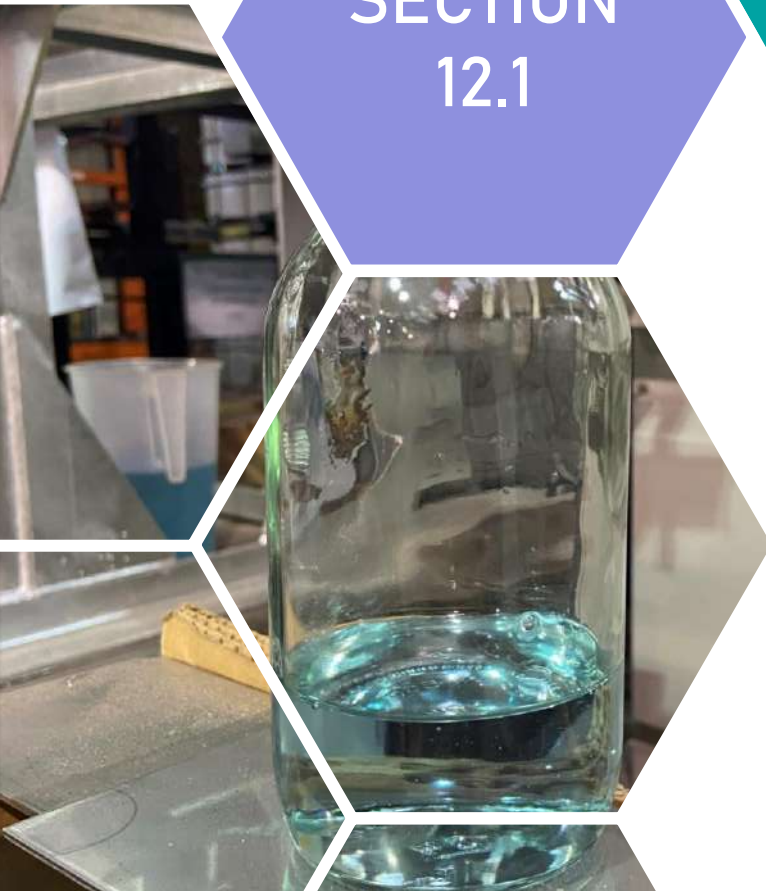



MIDEL® 7131

MIDEL® 7131 Transformer Fluid

Technical Data Sheets

www.midel.com

Dielectric Insulating Fluid Overview

December 2010 Page 1 of 2

MIDEL 7131 Product Overview

MIDEL 7131 is a synthetic ester-based dielectric fluid that has been serving the global transformer market for over 30 years. MIDEL 7131 has been specifically formulated to provide a safe, superior alternative to traditional fluid and dry-type transformers and can be used in indoor or outdoor locations.

MIDEL 7131 is a high performance fluid that offers increased fire safety, greater environmental protection and superior moisture tolerance. Testing has also proven that MIDEL 7131 has excellent dielectric properties.

IEC 61099 Conformity

MIDEL 7131 conforms to IEC 61099 "Specifications for Unused Synthetic Organic Esters for Electrical Purposes". It is classified as type T1, a halogen-free pentaerythritol ester.

Areas of Application

MIDEL 7131 filled transformers are available from all major transformer manufacturers. MIDEL 7131 is suitable for a wide range of transformer applications, including sealed and breathing.

- ▶ Distribution transformers
- ▶ Power transformers
- ▶ Traction transformers
- ▶ Rectifier transformers
- ▶ Pole-type transformers
- ▶ Tapchangers
- ▶ Thyristor cooling

Retrofilling

MIDEL 7131 has been used to retrofill thousands of distribution transformers to improve service life, reduce environmental hazards or increase fire safety.

Corrosive Sulphur

MIDEL 7131 has been tested by independent laboratories to ASTM D1275 B and IEC 62535, it was found to be non-corrosive.

Increased Fire Safety

MIDEL 7131 has a high fire point and a low net calorific value (<32 MJ/kg) and is therefore classified as a K3 class liquid.

- ▶ 100% fire safety record
- ▶ High fire point (>300°C)
- ▶ K-class to IEC 61100 / 61039
- ▶ FM Global[®] approved transformer fluid
- ▶ Reduced fire safeguarding costs

Greater Environmental Protection

MIDEL 7131 is an environmentally friendly alternative to conventional transformer fluids because it is classified as readily biodegradable and non-water hazardous.

- ▶ Readily biodegradable (OECD 301)
- ▶ Fully biodegradable (IEC 61039)
- ▶ Classified as non-water hazardous by (UBA)
- ▶ Non-toxic
- ▶ Will not evaporate into the environment
- ▶ Not detrimental to activated sludge in biological treatment plants
- ▶ RoHS compliant

High Performance

MIDEL 7131 is an extremely robust fluid that delivers long-term stability even when exposed to extreme temperature variations. MIDEL 7131 also has excellent oxygen stability allowing it to be used in breathing transformers.

- ▶ Robust and stable at high temperatures over long periods
- ▶ Suitable for compact transformer design
- ▶ Superior oxygen stability
- ▶ Excellent lubricant
- ▶ No sludge formation

Moisture Tolerance

MIDEL 7131 is moisture tolerant and can absorb far more water than alternative fluids, without compromising the breakdown voltage.

- ▶ No reduction of breakdown voltage (up to 600ppm / 20°C)
- ▶ Allows moisture to migrate from cellulose into the fluid
- ▶ Potentially keeps the cellulose drier and slows the rate of ageing
- ▶ Very high saturation limit making condensation virtually impossible
- ▶ Reduced risk of bubble formation

Delivery

MIDEL 7131 can be delivered in 24.5kg, 195kg or 1000kg sealed containers; bulk tanker deliveries available for >20 tonnes.

Disposal

For disposal, it is recommended that used MIDEL 7131 or remains of the insulating fluid be burnt in a suitable installation.

Dielectric Insulating Fluid Overview

December 2010 Page 2 of 2

Table 1 - Characterisation of Type T1 Transformer Ester According to IEC 61099 and DIN VDE 0375

	Unit	Test Method	Requirement	MIDEL 7131
Physical Properties According to IEC 61099				
Colour	HU	ISO 2211	max. 200	125
Appearance	-	IEC 61099 7.1.2	clear, free from suspended matter and sediment	clear, free from suspended matter and sediment
Density at 20°C	kg/dm ³	ISO 3675	max. 1.00	0.97
Kinematic Viscosity at 40°C	mm ² /s	ISO 3104	max. 35.0	28
Kinematic Viscosity at -20°C	mm ² /s		max. 3000	1400
Flash Point	°C	ISO 2719	min. 250	260
Fire Point	°C	ISO 2592	min. 300	316
Pour Point	°C	ISO 3016	max. -45	-60
Crystallisation	-	IEC 61099 (2010) Annex A	No crystals	No crystals
Chemical Properties According to IEC 61099				
Water Content	mg/kg	IEC 60814	max. 200	50
Neutralisation Value	mg KOH/g	IEC 62021-2	max. 0.03	<0.03
Oxidation Stability - Total Acid Content - Total Sludge Content	mg KOH/g % mass	IEC 61125	max. 0.3 max. 0.01	0.01 <0.01
Net Calorific Value	MJ/kg	ASTM D 240-02	<32	31.6
Dielectric Properties According to IEC 61099				
Breakdown Voltage	kV	IEC 60156	min. 45	>75
Dielectric Dissipation Factor Tan δ at 90°C and 50 Hz	-	IEC 60247	max. 0.03	<0.008
Volume Resistivity DC at 90°C	Gohm-m	IEC 60247	min. 2	>30

Data quoted above are typical values, may be altered without notice and do not constitute a specification

Increased Fire Safety

December 2010

Page 1 of 2

Increased Fire Safety

Experience shows that transformer fires can be particularly unforgiving, spreading at frightening speeds and causing expensive damage. Unfortunately, these potentially catastrophic fires are all too common in today's modern power distribution networks.

MIDEL 7131 offers the perfect solution to avoiding the unnecessary risk of a fire. Used and respected worldwide, MIDEL 7131 has an impeccable 100% fire safety record spanning over three decades.

FM Global®, a large internationally recognised insurance company, has approved MIDEL 7131 as a less flammable fluid, requiring less stringent fire safety measures. This can lead to lower safeguarding costs and insurance premiums. In addition MIDEL 7131's fire safe properties allow for use in transformers inside buildings and other critical areas where mineral oil would not be acceptable.



Flash and Fire Point

MIDEL 7131 has been specifically formulated to give a high flash and fire point, in excess of those required for K-class rating (IEC 61100 / 61039) and far superior to mineral oil (Table 1).

Ignition Resistance

Method

The flame from an oxy-acetylene torch (>2000°C) is directed onto the surface of a shallow pool of liquid in a metal pan. A thermocouple close to the base of the pan measures the temperature of the bulk liquid away from the surface of the pool.

Table 1 - Flash and Fire Points - IEC 61039 Class K3

Parameter	Test Method	Required	MIDEL 7131	Mineral Oil
Flash Point	ISO 2719	min. 250°C	260°C	150°C
Fire Point	ISO 2592	min. 300°C	316°C	170°C
Net Calorific Value	ASTM D240-02	<32	31.6MJ/kg	46.0MJ/kg

Data quoted above are typical values

Once the torch has been ignited, the temperature of the liquid is recorded. A comparison of the results for mineral oil and MIDEL 7131 are shown in Figure 1.

Results

The temperature of the mineral oil increased quickly and set on fire after only 4 minutes. The mineral oil continued to burn even after the ignition source was removed, emitting a thick black smoke.

In comparison, the temperature of the MIDEL 7131 rose at a much slower rate. After 70 minutes and a temperature of >260°C, the fluid still did not ignite. MIDEL 7131's low heating rate is due to its high specific heat and thermal conductivity, which combines with the high fire point to give MIDEL 7131 an excellent resistance to ignition.


Smoke and Combustion Products

In the extremely unlikely event of MIDEL 7131 igniting it would produce a non toxic, much lighter smoke in comparison to that of burning mineral oil. MIDEL 7131's smoke is also not as dense as the white silica smoke produced by silicone liquid fires. This is very pertinent when considering evacuation and rescue procedures.

Method

The quantity of smoke produced by transformer fluids is measured using Tewarson apparatus fitted with a light source and a photocell. This is designed to have response characteristics similar to those of the human eye.

Figure 1 - Ignition Resistance Comparison between MIDEL 7131 and Mineral Oil

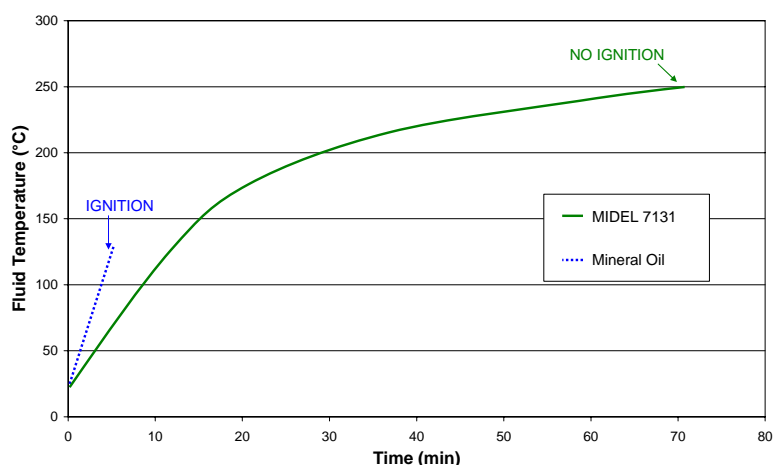

Increased Fire Safety

December 2010


Page 2 of 2

Results

The results in Figure 2 clearly demonstrate the low smoke properties of MIDEL 7131. The time axis is normalised to the start of ignition to provide an easy comparison of the smoke density figures. Predictably, mineral oil produced thick black smoke, silicone liquid produced a grey smoke and both were denser than the thin white smoke produced by MIDEL 7131. It should also be noted that in the test, MIDEL 7131 took over twice as long as mineral oil to ignite.

The results of the tests summarised in this data sheet confirm MIDEL 7131 is a fire safe alternative to mineral oil. Further fire testing has been conducted by M&I Materials and external laboratories and details are available on request. In terms of protection of personnel and property MIDEL 7131 is the obvious choice when specifying a fire safe fluid.

Figure 2 - Smoke Density Comparison for MIDEL 7131, Silicone Liquid and Mineral Oil

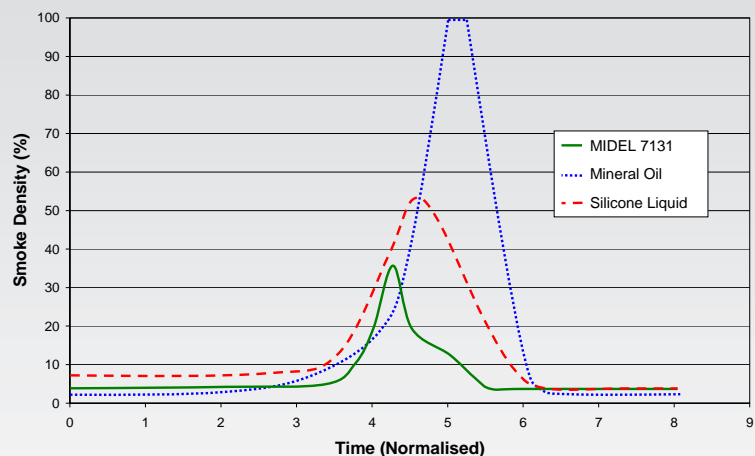

Greater Environmental Protection

December 2010 Page 1 of 2

Greater Environmental Protection

Companies are under increasing pressure to ensure their activities cause as little damage as possible to the environment. A call for change is evident from the introduction of strict governing standards and legislation designed to encourage best practice and punish the neglect of our communities.

Companies with progressive thinking have realised that as well as helping to save the planet, they can also benefit from the positive PR and cost advantages associated using 'greener options'.

MIDEL 7131 has been proven to be non-toxic and readily biodegradable, and as such is an environmentally friendly alternative to mineral oil and silicone liquid. MIDEL 7131's classification as non-water hazardous by UBA further supports this assertion.


Biodegradation

Biodegradation is the process by which organic substances degrade and become harmlessly absorbed by the environment. The biodegradation of MIDEL 7131 has been assessed by an accredited laboratory using a standard test method developed by the Organization for Economic Cooperation and Development (OECD), a worldwide standard-setting body.

Method

Tests for biodegradation use micro-organisms, of the type present in wastewater treatment plants. These organisms are put into glass jars with the test compound for 28 days. Measurements are taken of the oxygen consumed, or carbon dioxide produced, to determine the biodegradation percentage.

Figure 1 - Biodegradation of MIDEL 7131

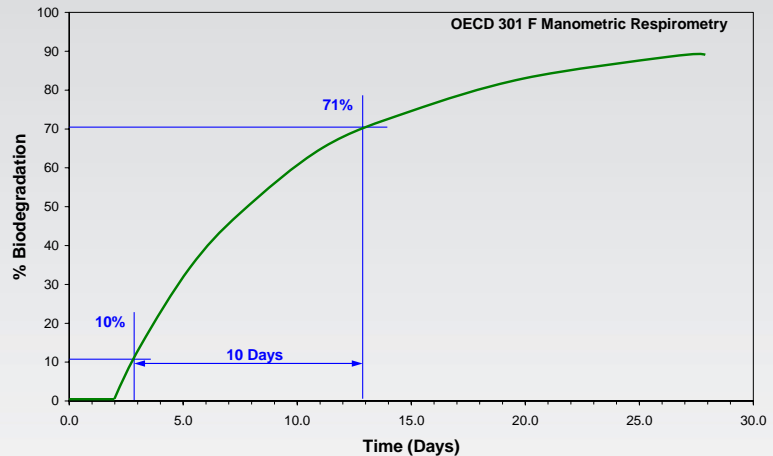

Results


Figure 1 demonstrates that MIDEL 7131 achieved 10% degradation by day 3 and 10 days later it was 71% degraded. On the 28th day MIDEL 7131 reached 89% degradation, putting it comfortably in the Readily Biodegradable OECD and the Fully Biodegradable IEC 61039 categories.

MIDEL 7131 will not biodegrade in a transformer. This is due to the fact that the conditions within the transformer are too hot and dry to sustain microbial life.

Comparative independent studies examining the biodegradation of mineral oil and silicone liquid show a stark contrast to the environmentally friendly MIDEL 7131.

In Figure 2, the graph clearly demonstrates that neither of MIDEL 7131's counterparts managed to achieve even a 10% level of degradation at the end of the 28 day test period. Therefore MIDEL 7131's excellent biodegradable properties make it the sensible solution for use in a transformer.

Figure 2 - Biodegradation of Mineral Oil and Silicone Liquid

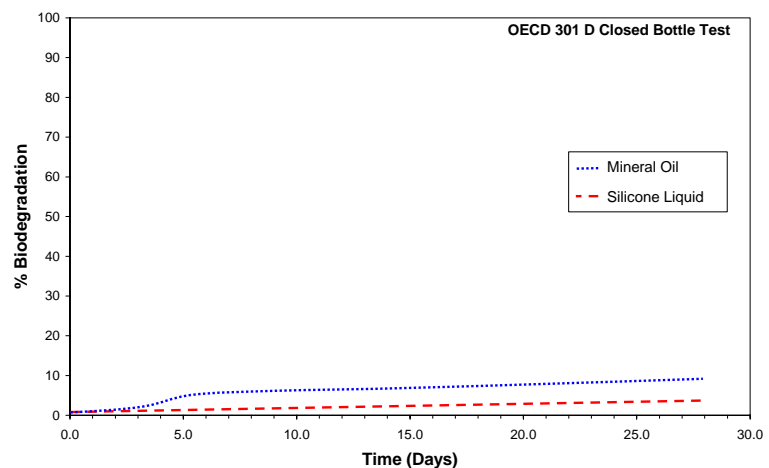

Greater Environmental Protection

December 2010 Page 2 of 2

UBA Water Hazard Classification

Germany's central environmental authority, Umwelt Bundes Amt (UBA), evaluates chemicals and provides them with ratings, either as non-water hazardous (nwg) or one of three hazard levels.

The UBA classification is based on the biodegradability of the chemical combined with the potential effect on aquatic life. The classification for various transformer fluids is shown in the Table 1. MIDEL 7131 is classified as non-water hazardous, while silicone liquid and mineral oils do present some hazard and therefore require extra containment measures incurring further costs.

Effect on Aquatic Life

In addition to the importance of biodegradability, it is favourable if a transformer fluid does not represent a hazard to the ecosystem. In extreme concentration levels of 1000mg/l it has been demonstrated that MIDEL 7131 will have no ill effects on aquatic life in the event of a spillage into a watercourse.

Table 1 - Common Test Parameters and Guidance Limits

Fluid	CAS Number	UBA Classification
MIDEL 7131	68424-31-7	nwg
Silicone Liquid	63148-62-9	1
Mineral Oils	Variety	1

Wastewater

Biological sewage treatment plants use 'activated' or microbially active sludge to break down organic matter within sewage. Contaminating chemicals can destroy these micro-organisms and a total cessation of the sewage treatment process may result. This is a very costly and time consuming problem for the sewage treatment industry.

Tests carried out by the global chemical company, BASF; demonstrate that MIDEL 7131 has no effect on the respiratory inhibition of activated sludge even at very high concentrations of up to 1000mg/l. The conclusion is that MIDEL 7131 does not represent a risk to biological treatment plants.

Advantages of Using Biodegradable MIDEL 7131

Local regulations and insurance companies usually determine the containment requirements for transformers. Over the years it has become more common for insurance companies to identify reduced containment requirements for transformers containing safer alternatives to mineral oils.

FM Global[®] is an internationally recognised insurance company. In its loss prevention datasheets for MIDEL 7131 filled outdoor transformers, containment is not required until the fluid volume exceeds 2640 gal (10,000 litres). In contrast for mineral oil bunding is required when the fluid volume exceeds 500 gal (1900 litres).

High Performance

December 2010 Page 1 of 2

High Performance

On average the service life of a transformer is forty years and subsequently the fluid used to insulate and cool the system is expected to perform reliably for an equivalent length of time. Oxidation and ageing are two factors that can seriously affect the dependability of some fluids. The lubrication properties of fluids are also important to ensure long equipment life time.


Oxidation Resistance

Oxygen has been shown to contribute to the ageing of mineral oil in transformers. This in turn causes sludging and degradation of the fundamental characteristics of the oil. In addition, at high temperatures the effects of oxidation are accelerated and even in sealed systems, the oil can age.

MIDEL 7131's resistance to oxidation has been demonstrated in high temperature breathing applications, such as traction transformers, where variable loads and compact designs highly stress the transformer fluid.

One way to compare transformer fluid oxidation stability is using the ASTM D 2112 Pressurised Vessel Oxidation Test. It measures the time taken for oxygen to be consumed and hence indicates the reactivity of the fluid. Figure 1 shows the time in minutes for a set pressure drop in the test vessel. The longer the time for this pressure drop, the more oxidation stable the fluid. MIDEL 7131 gives the longest time in this example, demonstrating its excellent oxidation stability. Natural ester gives the lowest numbers, showing that it has poor oxidation stability.

Figure 1 - Oxidation Stability Pressurised Vessel Test Results

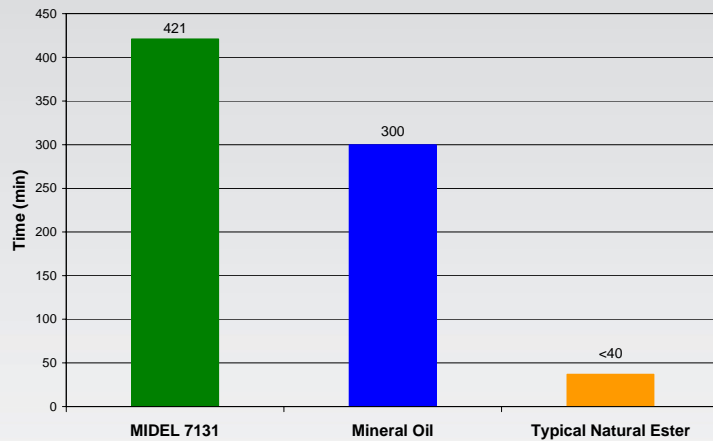

High Temperature Performance


Extensive testing has demonstrated that MIDEL 7131 is a robust and stable fluid which is suitable for both sealed and breathing transformers.

One key indicator of ageing in transformer fluids is the acid value. Figure 2 shows the acid value of MIDEL 7131 over a period of more than one year, in a sealed system with common transformer

materials such as copper. The fact that the acid value remains well below the IEC 61203 specification limit throughout the trial, shows that MIDEL 7131 is very resistant to ageing.

A number of other parameters were monitored during the sealed ageing trial, such as viscosity, density and fire point. There was no significant change in any of these, further demonstrating the high temperature stability of MIDEL 7131.

Figure 2 - Acid Value of MIDEL 7131 during Sealed Ageing Experiment

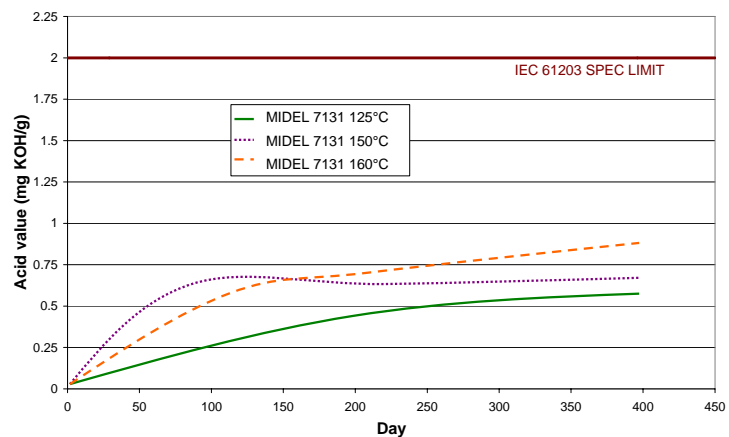

High Performance


December 2010 Page 2 of 2

Lubrication Properties

MIDEL 7131 is an excellent lubricant as well as being a high quality dielectric and cooling fluid. Lubrication is important in many transformers for continuous efficient working. For example, in tap-changer contacts, if the fluid does not prevent a metal to metal seizure or even a small increase in friction, it is likely that the system would be prone to early failure. Similarly, in systems with more demanding lubrication requirements, such as high speed pumping devices used in circulating cooler systems, efficient lubrication is also needed to prevent a breakdown.

Figure 3 shows the results of a Four Ball Wear Test with the lower wear scar number indicating better lubricity. MIDEL 7131 gave the lowest result demonstrating that it has the best lubrication properties of the three fluids compared. This gives assurance that when used in tap changers and pumped systems MIDEL 7131 will provide excellent longevity for components.

Figure 3 - Four Ball Wear Test

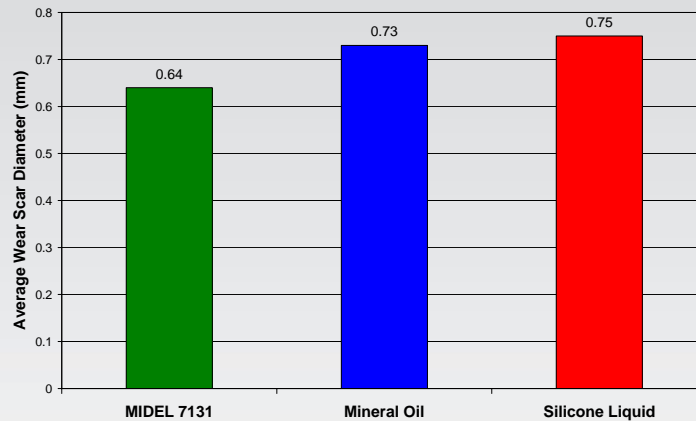

Moisture Tolerance

December 2010 Page 1 of 2

Moisture Tolerance

MIDEL 7131 has a very high moisture tolerance. This means it can absorb far greater amounts of water than mineral oil and silicone liquid without compromising its dielectric properties. MIDEL 7131 can also trap more water which may slow down cellulose ageing. In the case of mineral oil, there is a danger that this water will be released as condensation.


Why Moisture Tolerance Is Important in Transformers:

- ▶ Dielectric strength - reduces as moisture content increase
- ▶ Rate of paper ageing - increases with higher moisture content
- ▶ Bubble formation during overloads - bubbles form at a lower temperature when there is a high moisture content in the paper
- ▶ Condensation during cool down - risk of release of free water from mineral oil

Dielectric Strength

Figure 1 shows the breakdown voltage at ambient temperature of MIDEL 7131, mineral oil and silicone liquid with increasing moisture levels. It clearly illustrates that even a small amount of water in mineral oil and silicone liquid cause a rapid deterioration in breakdown voltage. In contrast, MIDEL 7131 maintains a high breakdown voltage of >75kV even when moisture levels exceed 600ppm.

Figure 1 - Breakdown Voltage vs. Moisture Content at 20°C

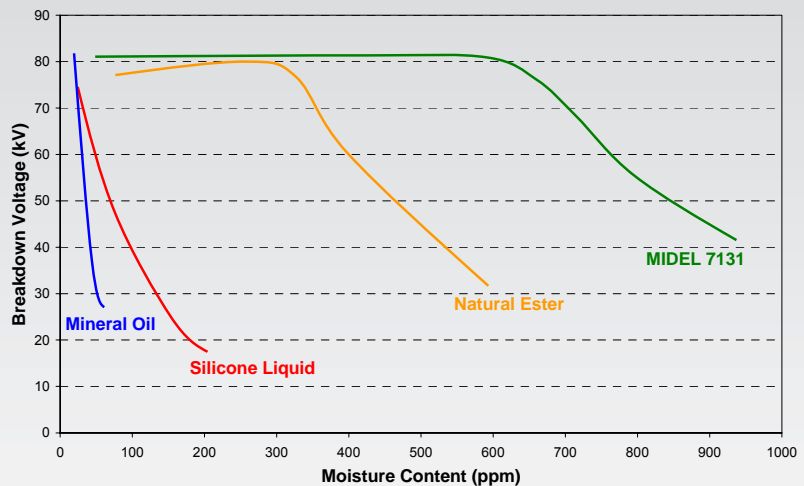

Rate of Paper Ageing

The rate of paper ageing is directly related to the water content. Various studies have shown that the lifetime of the paper reduces by as much as a factor of ten for each extra 1% of water content in the cellulose. As the cellulose ages it releases water, thus accelerating the ageing process. Therefore it is vital that cellulose is kept as dry as possible.

MIDEL 7131 has the ability to trap more moisture than mineral oil, which can reduce the amount of water in the paper and hence reduce the ageing rate.

Using moisture equilibrium curves it is possible to show that for MIDEL 7131 at 60°C, water content in fluid of 200ppm would equate to water content in the cellulose of 1.1%. At the same temperature, mineral oil with a water content of 20ppm would lead to water content in the cellulose of 2.6%. The extra 1.5% of moisture would equate to at least a ten fold decrease in the life of the cellulose.

Bubble Evolution During Overloads

Bubbles in dielectric fluids are undesirable since they are electrically weak. According to IEC 60076-14, bubble evolution temperature is directly related to the moisture content of cellulose. During overload conditions the temperature of paper wrapped conductors will rise, increasing the risk of reaching critical temperatures for bubble evolution. For example, with a paper water content of 2.6% the temperature at which bubbles form will be 130°C. With a water content of 1.1% the bubble evolution temperature is 165°C. Since MIDEL 7131 has the ability to keep paper drier it gives a greater margin of safety during overloads.

Moisture Tolerance

December 2010 Page 2 of 2

Condensation During Cool Down

With mineral oil there is a potential for water to be released when a transformer cools from operating temperature to ambient. This is due to the fact that mineral oil has a low moisture saturation limit which reduces as the temperature drops. MIDEL 7131 has a much higher saturation limit, which means that it is far more difficult to reach the saturation point.

For example if a transformer with mineral oil and a paper water content of 1.5% was running at 90°C the water content of the mineral oil would be 65ppm. If the transformer then shut down the water would tend to stay in the mineral oil. At 20°C the saturation limit of mineral oil is 55ppm, so the mineral oil would be 118% saturated, releasing free water into the transformer. The breakdown voltage of the mineral oil will also be very low, increasing risk of failure when restarting.

Using the same example for MIDEL 7131 at 90°C the water content would be 700ppm. The saturation limit for MIDEL 7131 at 20°C is 2700ppm, so even if all the water stays in the MIDEL 7131 it will only be 26% saturated. This means there is no free water and still an excellent breakdown voltage.

Table 1 - Standards for Moisture Content

Standard	Moisture Content
IEC 61099 - New Esters	max. 200ppm
IEC 61203 - In-service Esters	max. 400ppm
BS 148 - New Mineral Oil	max. 30ppm
BS 5730 - In-service Mineral Oil	max. 30ppm

Note: The typical value for new MIDEL 7131 is 50ppm

Moisture Content Testing

The standards relating to moisture content for new and in-use fluids are shown in the Table 1. New MIDEL 7131, as delivered, is manufactured to very high standards with typical moisture content of 50ppm.

MIDEL 7131 will still be within specification up to 400ppm. In contrast, mineral oil will be out of specification above just 30ppm. This has practical implications for the interpretation of moisture level analysis. Also, if moisture-monitoring equipment is integrated within a transformer, its tolerance settings should be adjusted accordingly.

Please contact M&I Materials Limited for further advice.

Moisture Removal

Should the moisture content rise above the maximum in-service limit, the same methods and equipment that are used for removing moisture from mineral oil can also be used to remove moisture from MIDEL 7131. For example molecular sieves and vacuum filtration units.

Comparison to Alternative Technologies

December 2010 Page 1 of 2

MIDEL 7131 versus Alternative Fluids

MIDEL 7131 is a high performance fluid that offers the advantages of increased fire safety, greater environmental protection and excellent moisture

tolerance. Research carried out over many years by the Technical Department at M&I Materials Limited has proven the superior behaviour of MIDEL 7131 in comparison to other fluids.

Table 1 compares the main properties of MIDEL 7131 with mineral oil, natural ester and silicone fluid.

Table 1 - Comparison of Main Properties of MIDEL 7131 with Alternative Fluids

	Units	MIDEL 7131	Silicone Liquid	Mineral Oil	Natural Ester
General Properties					
Density at 20°C	kg/dm ³	0.97	0.96	0.88	0.92
Specific Heat at 20°C	J/kg K	1880	1510	1860	1848
Thermal Conductivity at 20°C	W/m K	0.144	0.151 (@ 50°C)	0.126	0.177
Kinematic Viscosity at 20°C	mm ² /s	70	50 (@ 25°C)	22	85
Kinematic Viscosity at 100°C	mm ² /s	5.25	15	2.6	8.4
Pour Point	°C	-60	<-50	-50	-21
Expansion Coefficient	/°C	0.00075	0.00104	0.00075	0.00074
Flash Point to ISO 2719	°C	260	260	150	316
Fire Point to ISO 2592	°C	316	>350	170	360
Fire Hazard Classification to IEC 61100/ IEC 61039		K3	K3	O	K2
Biodegradability at 28 Days					
- OECD 301 F	%	89	N/A	N/A	97
- OECD 301 D	%	N/A	<5	<10	N/A
Chemical Properties					
Neutralisation Value	mg KOH/g	<0.03	<0.01	<0.03	<00.03
Net calorific Value	MJ/kg	31.6	28.0	46.0	37.5
Dielectric Properties					
Breakdown Voltage	kV	>75	50	> 70	>75
Dielectric Dissipation Factor Tan δ at 90°C		<0.008	<0.001	<0.002	<0.003
Permittivity at 20°C		3.2	2.7 (@ 25°C)	2.2	3.1

Data quoted above are typical values, may be altered without notice and do not constitute a specification

Comparison to Alternative Technologies

December 2010 Page 2 of 2

MIDEL 7131 versus Cast Resin

Cast resin transformers are sold as a fire safe solution for indoor installations and used in applications such as wind turbines. Although these types of transformers have found wide application they do have some disadvantages and their reliability record has been called into question in some of the more demanding transformer applications. MIDEL 7131 filled transformers can offer a fire safe solution, without the drawbacks associated with cast resin transformers.

Table 2 - Comparison of Main Properties of MIDEL 7131 with Cast Resin

Property	MIDEL 7131	Cast Resin
Fire Resistance	Excellent	Moderate
Environmental Impact	Excellent	Moderate
Life Expectancy	High	Moderate
Efficiency	High	Low to Moderate
Sound Level	Low	Moderate
Operating Temperature	Low	Moderate
Contamination Resistance	Excellent	Moderate
Overload Capacity	Excellent	Moderate
Maintenance	*None on sealed transformers	Regular cleaning and crack detection
Fault Diagnosis (DGA)	Yes	No
Repair Possible	Yes	Difficult

*Subject to transformer manufacturer's recommendations

Table 3 - Efficiency and Recycling Cost Comparison of 20 kV Fluid Filled Compact Transformer Design with a Typical Cast Resin Transformer

	Fluid Filled	Cast Resin
Dimensions, mm	2210 x 770 x 2200	2000 x 840 x 2170
Mass, kg	4500	4600
No Load Loss, kW	2.1	3.9
Load Loss @125°C, kW	19	19.2
Recycling Cost, €/kg	0.07	0.14

Fluid Maintenance Guide - Distribution Transformers

December 2010 Page 1 of 1

General

MIDEL 7131 is a very robust fluid which is capable of giving long service, even in the most demanding of applications. As with mineral oil, in order to ensure that MIDEL 7131 gives continued good service it is possible to monitor a number of the fluid parameters throughout the life of the transformer. Testing the fluid also has the added benefit of picking up any potential problems with the transformer before a failure occurs.

Generally, for distribution transformers, sampling of the fluid is recommended before energising, after the first year of service and at five year intervals from then on. For larger power transformers, highly loaded or critical units, the frequency of testing may be increased.

It is important to understand some fundamental differences between MIDEL 7131 and mineral oils when carrying out fluid testing for maintenance. Many laboratories are now experienced in the testing of MIDEL 7131, but at times a failure can be logged against a sample when the incorrect mineral oil limits are applied.

Table 1 shows the typical fluid testing parameters and the limits according to IEC 61203 'Synthetic organic esters for electrical purposes - Guide for maintenance of transformer esters in equipment'. It should be noted that this guide and the IEC 61203 standard do not apply to retrofilled transformers, i.e. those that have previously been filled with another fluid.

Table 1 - Common Test Parameters and Guidance Limits

Parameter	Test Method	IEC 61203
Appearance	IEC 61203 3.1	Clear, without visible contamination
Water Content*	IEC 60814	max. 400 ppm
Neutralisation Value	IEC 61099 9.11	max. 2.0 mg KOH/g
Breakdown Voltage	IEC 60156	min. 30 kV
Fire Point	ISO 2592	min. 300 °C

*At ambient temperature

Breakdown Voltage Testing

The breakdown voltage of new MIDEL 7131 is typically in excess of 75kV when tested to the IEC 60156 2.5mm gap method. Testing has demonstrated that even after long term ageing of the fluid there is little deterioration of the breakdown voltage. In addition, even at very high moisture contents, up to 1000ppm at ambient temperature, testing has shown that the breakdown voltage will be preserved well above the 30kV lower limit.

There are some issues that can cause a drop in breakdown voltage and the first is particulate matter in the fluid. Particles can float between the test probes and cause a localised weakness when carrying out the breakdown test. This can usually be identified by erratic results when comparing a series of breakdowns. If particles are suspected to be causing a breakdown issue then the fluid can be filtered through a fine paper filter and re-tested.

Another issue that can arise is if enough settling time is not allowed between each breakdown test. In this case gas bubbles formed by the breakdown arc are not given sufficient time to dissipate and can cause a weak link between the probes. Typically an average of six breakdown tests are taken and it is recommended to leave a minimum settling time of ten minutes before the first breakdown test and then five minutes between each subsequent breakdown test to ensure that gas bubbles have sufficient time to disperse.

DGA and Furan Analysis

Diagnosis of transformer performance by traditional DGA and Furan analysis is still applicable to MIDEL 7131 filled transformers. The methods used to diagnose faults with DGA in mineral oil can be used with MIDEL 7131 provided minor adjustments are made to Duval triangle boundaries and table ratios. For further information contact M&I Materials Ltd technical department.

Storage & Handling Guide

December 2010 Page 1 of 1

Introduction

MIDEL 7131 is a very robust fluid and studies have demonstrated its long term stability, even at elevated temperatures. For years, it has been successfully used worldwide in breathing and sealed transformer systems. It is still necessary, however to take precautions when handling and storing MIDEL 7131 to ensure that it is kept in optimum condition.

Receiving New MIDEL 7131

MIDEL 7131 can be delivered in 24.5kg, 195kg or 1000kg sealed containers; bulk tanker deliveries are available for >20 tonnes. Prior to filling the containers the fluid is dried and degassed. On receipt of the fluid users may notice a slight deformation of the containers. This is due to the degassed fluid absorbing the small amount of air in the headspace, thus creating a vacuum. This is perfectly normal and a good indication that the seal has not been compromised.

The vacuum seal in 1000kg IBCs needs to be broken and the recommendation is to contact IBC supplier Schütz to obtain the correct lid removal tool (part no. 16659).

Storage

If kept in the unopened containers MIDEL 7131 has an indefinite shelf life. Once opened precautions should be taken to avoid contact with moist air for prolonged periods because the fluid is hygroscopic and will absorb atmospheric moisture. If a partially emptied container is used for storage the head space should ideally be back-filled with dry nitrogen or dry air prior to resealing. If this is not possible, then ensuring the lid is properly sealed will help keep the fluid dry.

If the fluid is kept in intermediate bulk containers the ideal location will be indoors to avoid extremes of temperature and

exposure to the weather. Where outdoor storage is unavoidable exposure to direct sunlight should be prevented using a simple covering.

Storage tanks which are suitable for standard mineral oil can be used for MIDEL 7131. It is recommended that the tank headspace has a dry nitrogen blanket to keep out moisture. If this is not possible then dry air should be used in the headspace and a suitable breather unit fitted to any vent system. If a silica gel breather is used to dry the headspace air then this must be properly maintained to ensure that the fluid quality is preserved.

Pumping

MIDEL 7131 is an excellent lubricant, so no specialist pumping equipment is required. The viscosity of MIDEL 7131 is slightly higher than mineral oil at ambient temperatures and this must be taken into account when specifying pumping systems. A higher capacity pump will be needed to maintain the same flow rate as mineral oil at a given temperature. Table 1 shows viscosity values versus temperature for reference.

As with any dielectric fluid there is a possibility of static charge build up when MIDEL 7131 is flowing through the pipes. The user should ensure that all pumps,

lines and vessels are adequately bonded and earthed during pumping operations.

Transformer Filling and Cellulose Impregnation

To avoid air entrapment in the transformer cellulose the tank should be filled from the bottom or if possible under vacuum.

In order to aid impregnation of the cellulose it is recommended that MIDEL 7131 be heated to approximately 60°C when filling. At 60°C the viscosity of the fluid is very close to that of mineral oil at 20°C, and a similar impregnation rate has been observed in laboratory testing. It is further recommended that the transformer is filled slowly to aid impregnation and left for at least 24 hours prior to energising for the first time.

Throughout all stages of the filling operation it is essential that the introduction of moisture or particulate matter be avoided. The outlet side of any pump used during filling should be protected by a fine mesh or paper element filter.

The use of degassing and vacuum filling is possible with MIDEL 7131, using the same type of equipment and methods employed with mineral oil.

Table 1 - Viscosity Values Versus Temperature

Temperature °C	Absolute Viscosity mPa s	Kinematic Viscosity mm ² /s
0	236	240
20	68	70
40	27	28
60	13	14

Data quoted above are typical values

Safety Data Sheet

December 2010 Page 1 of 3

1. Substance/Company Identification

Product Name:	MIDEL [®] 7131.
Product Type:	Dielectric fluid.
REACH No:	01-2119542596-31-0000.
CAS No:	68424-31-7.
Substance Name:	Fatty acids, C5-10 (linear and branched), mixed esters with pentaerythritol.
Company Details:	M&I Materials Ltd. Hibernia Way, Trafford Park, Manchester, M32 0ZD, UK.
Telephone:	+44 (0)161 864 5411
Emergency Telephone:	+44 (0)161 864 5439.
Email:	RussellMartin@mimaterials.com.

2. Hazards Identification

Not classified under Directive 67/548/EEC or Regulation (EC) no. 1272/2008 (CLP).

3. Composition/Ingredients

Composition:	Fatty acids, C5-10 (linear and branched), mixed esters with pentaerythritol.
Hazardous Ingredients:	None.

4. First Aid Measures

Eyes:	Wash immediately with plenty of water for at least 15 to 20 min. Obtain medical attention if irritation develops.
Skin:	Wash with soap and water for at least 15 to 20 min. Obtain medical attention if irritation develops.
Ingestion:	Do not induce vomiting. Obtain medical attention.

5. Fire Fighting Measures

Suitable Extinguishing Media:	Carbon dioxide, dry powder, foam or water fog. Do not use water jets.
Protective Equipment:	Self-contained breathing apparatus may be required.

6. Accidental Release Measures

Personal Precautions:	Spilt product can constitute a slip hazard. Avoid contact with skin and eyes.
Environmental Precautions:	Do not contaminate any lakes, streams, ponds, groundwater or soil. Avoid flushing into drains. In the event of a large spillage contain product as thoroughly as possible and dispose of in accordance with local regulations.
Cleaning Procedures:	Use an inert absorbent material (e.g. sand, earth, etc.) and place in labelled containers.

7. Handling and Storage

Handling:	Avoid eye and prolonged skin contact.
Storage:	Store in a cool dry place.
Specific Use:	Exposure to air should be minimised. Opened containers should be properly resealed.

8. Exposure Controls/ Personal Protection

Respiratory Protection:	Not required for normal use.
Hand Protection:	Wash hands after use. For prolonged or repeated skin contact gloves are recommended.
Eye Protection:	If splashes are likely to occur wear safety glasses.
Skin Protection:	Wear coveralls.

Safety Data Sheet

December 2010 Page 2 of 3

9. Physical & Chemical Properties

Physical State:	Organic liquid.
Odour:	Faintly sweet.
Melting Point/ Freezing Point:	-57°C.
Boiling Point:	>300°C.
Flash Point (Closed Cup):	260°C.
Flammability:	Non flammable.
Vapour Pressure at 20°C:	<0.001Pa.
Relative Density @ 20°C:	970kg/m ³ .
Water Solubility:	<1mg/l.
Partition Coefficient, log K _{ow} :	>6.74.
Explosive Limits:	Not determined.
Auto-ignition Temperature:	No auto-ignition expected.
Viscosity @ 40 °C:	28mm ² /s.
Explosive Properties:	Non-explosive.
Oxidising Properties:	Non-oxidising.

10. Stability & Reactivity

Stability:	Stable under normal ambient conditions.
Conditions to Avoid:	Temperatures >250°C.
Materials to Avoid:	Strong oxidising agents.
Hazardous Decomposition Products:	None known.

11. Toxicological Information

Eyes:	May cause transient irritation.
Inhalation:	Low volatility makes inhalation unlikely.
Ingestion:	May cause nausea, vomiting and diarrhoea.
Skin:	Repeated and prolonged skin contact may cause irritation.
<u>Acute Toxicity</u>	
Oral LD50, OECD 401:	>2000mg/kg bw.
Dermal LD50, OECD 402:	>2000mg/kg bw.
<u>Irritation</u>	
Skin, OECD 404:	Not irritating.
Eye, OECD 405:	Not irritating.
<u>Sensitisation</u>	
Skin, OECD 406:	Non sensitising.

12. Ecological Information

Biodegradation, OECD 301 F:	Readily biodegradable, 89% after 28 days.
<u>Acute Aquatic Toxicity</u>	
Salmo Gairdneri LC50 (96h), OECD 203:	>1000 mg/l.
Daphnia Magna EL50 (48h), OECD 202:	>1000 mg/l.
Bioaccumulation Potential:	No potential for bioaccumulation.

13. Disposal Considerations

Product and packaging must be disposed of in accordance with local and national regulations. May be incinerated. Unused product may be returned for reclamation.

14. Transport Classification

Not classified as hazardous under air (ICAO/IATA), sea (IMDG), road (ADR) or rail (RID) regulations.

15. Regulatory Information

Substance is registered under the REACH regulation, EU directive 1907/2006/EC and included in the TSCA Inventory of Chemical Substances.



BUSHINGS: EUROMOLD 700 SERIES

(PRODUCT DATA - 7 PAGES)

SECTION
12.2

Euromold

a Nexans company



Medium voltage separable
connectors and bushings
- Interface E -

Catalogue 2012

SEPARABLE CONNECTORS AND BUSHINGS


INTERFACE E - 5/8"

Table of contents


- 750LR & 775LR - tee connector
- 750S1, 775S1 & 775T1 - equipment bushing
- Accessories
- Possible arrangements

INTERFACE E - 5/8"

Dimensions according to ANSI/IEEE std. 386 (in mm, except where noted).

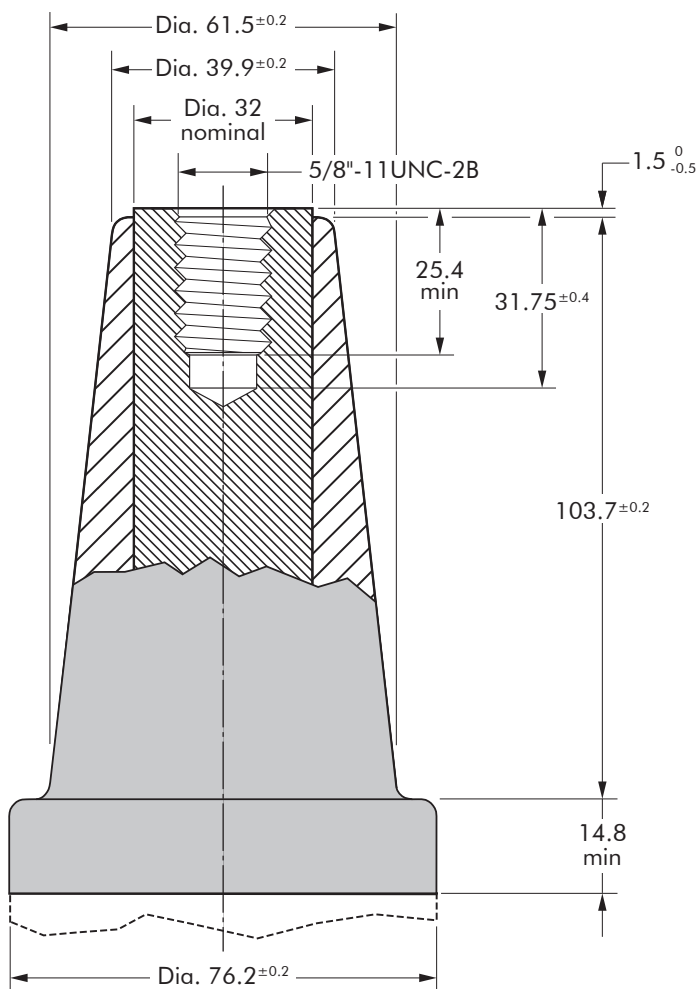

Connecting possibilities

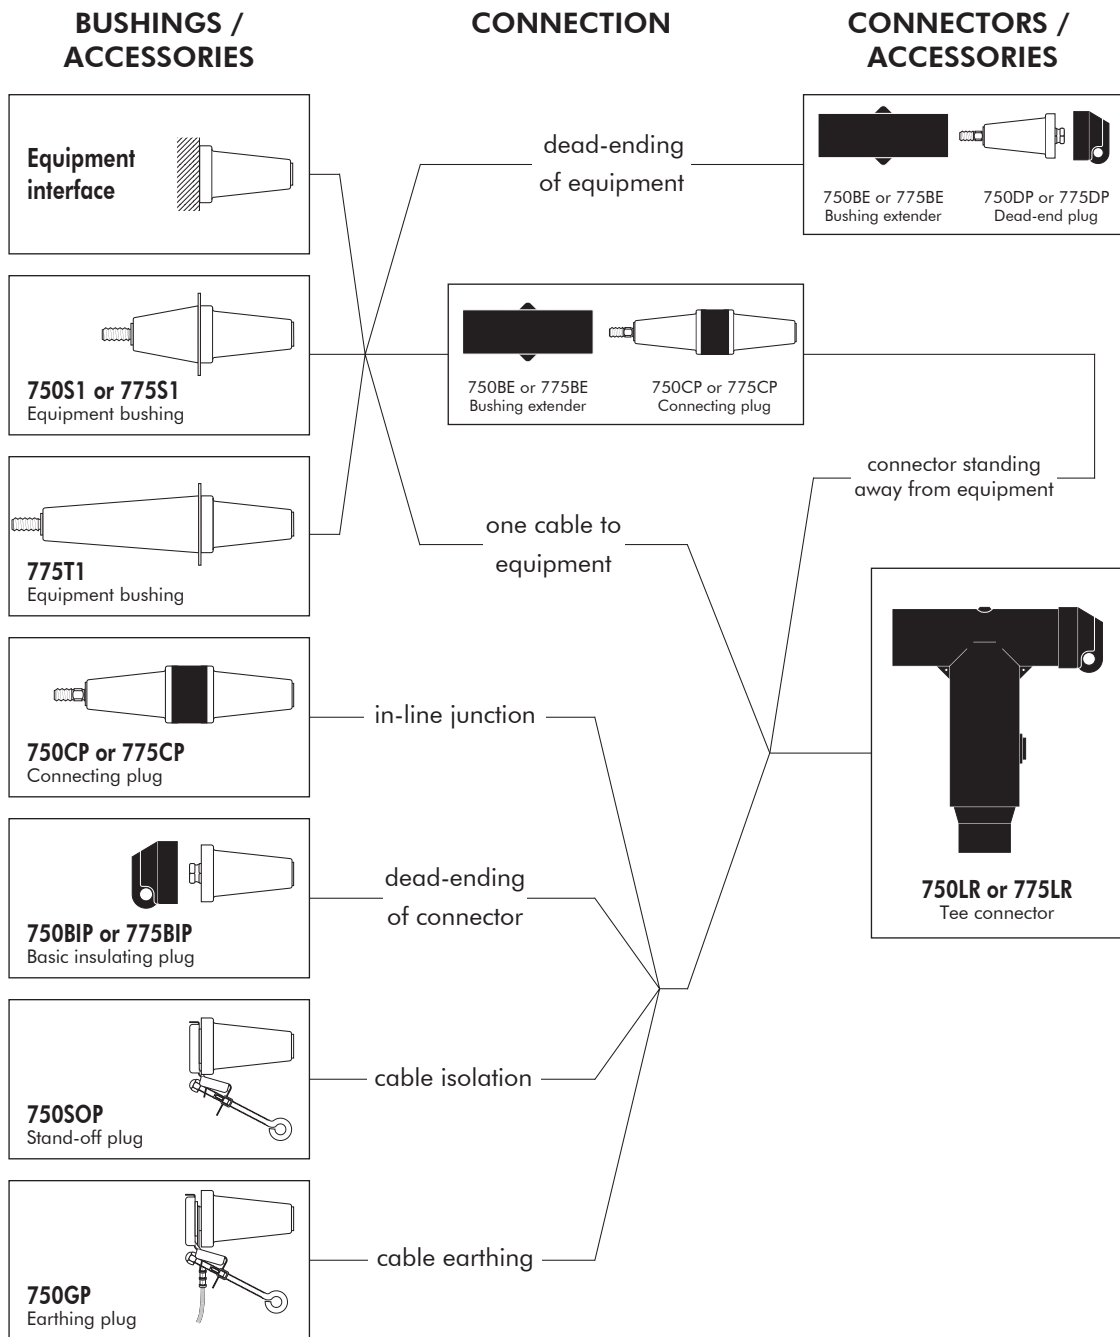

750LR & 775LR INTERFACE E - 5/8" TEE CONNECTOR

**Up to 36 kV
800 A & 1250 A**

6/10 (12) kV
6.35/11 (12) kV
8.7/15 (17.5) kV
12/20 (24) kV
12.7/22 (24) kV
18/30 (36) kV

Application

Separable tee connector (bolted 5/8" type) designed to connect polymeric insulated cable to equipment (transformers, switchgear, motors...). Also connects cable to cable, using the appropriate mating part.


Technical characteristics

- A thick conductive EPDM jacket provides a total safe to touch screen.
- Each separable connector is tested for AC withstand and partial discharge prior to leaving the factory.

Design

Separable connector comprising:

1. Conductive EPDM insert.
2. Conductive EPDM jacket.
3. Insulating EPDM layer moulded between the insert and the jacket.
4. Type E interface as described in ANSI/IEEE std. 386.
5. Threaded stud 5/8".
6. Conductor connector.
7. Cable reducer.
8. Dead-end plug (with VD point).
9. Conductive rubber cap.
10. Cable adaptor.

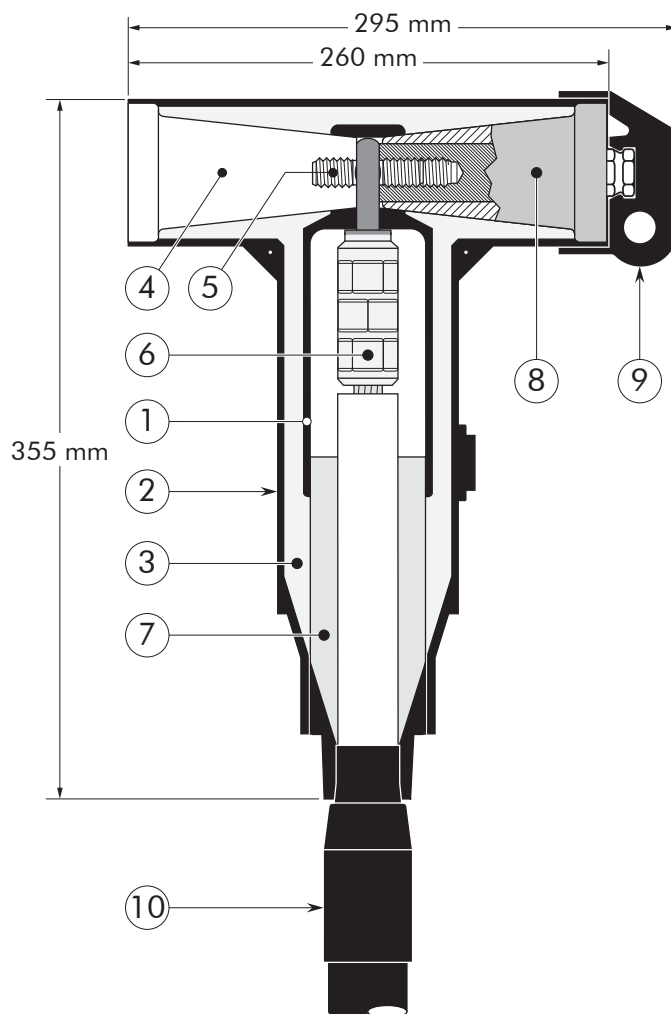

Specifications and standards


The separable connectors 750LR and 775LR meet the requirements of CENELEC HD 629.1.

Separable connector type	Voltage U_m (kV)	Current I_r (A)	Conductor sizes (mm ²)	
			min.	max.
750LR	36	800	35	630
775LR	36	1250	35	630

Kit contents

The complete 750LR or 775LR tee connector kit comprises the following components:

The kit also comprises lubricant, wipers, installation instructions and crimp chart.

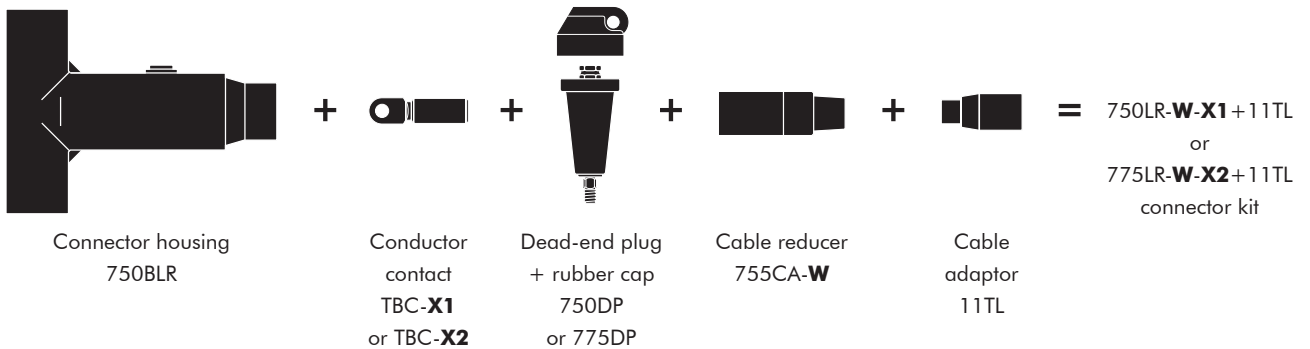

Ordering instructions

Select the part number which gives the best centring to the cable core insulation diameter.

Example:


The copper wire screened cable is 36 kV, 300 mm² stranded aluminium with a diameter over core insulation of 38.8 mm. Order a 750LR-M-300KM-10-2+11TL tee connector kit for 800 A application.

Table W


Ordering part number - 800 A	Ordering part number - 1250 A	Dia. over core insulation (mm)	
		min.	max.
750LR-G-X1+11TL	775LR-G-X2+11TL	19.3	24.1
750LR-H-X1+11TL	775LR-H-X2+11TL	21.6	26.7
750LR-J-X1+11TL	775LR-J-X2+11TL	24.9	30.0
750LR-K-X1+11TL	775LR-K-X2+11TL	27.7	33.3
750LR-L-X1+11TL	775LR-L-X2+11TL	30.0	37.2
750LR-M-X1+11TL	775LR-M-X2+11TL	34.8	41.1
750LR-N-X1+11TL	775LR-N-X2+11TL	38.5	45.2
750LR-P-X1+11TL	775LR-P-X2+11TL	43.8	49.1
750LR-Q-X1+11TL	775LR-Q-X2+11TL	48.3	53.9

Table X


Conductor sizes (mm ²)	Table X1: 800 A			Table X2: 1250 A		
	Aluminium conductor		Copper conductor	Aluminium conductor		Copper conductor
	DIN hexagonal	Deep indent	DIN hexagonal	DIN hexagonal	Deep indent	DIN hexagonal
35	35(K)M-10-2	35KM-10-1	35(K)M-14	35(K)M-12-2	35KM-12-1	35(K)M-11-2
50	50(K)M-10-2	50(K)M-10-1	50(K)M-14	50(K)M-12-2	50(K)M-12-1	50(K)M-11-2
70	70(K)M-10-2	70(K)M-10-1	70(K)M-14	70(K)M-12-2	70(K)M-12-1	70(K)M-11-2
95	95(K)M-10-2	95(K)M-10-1	95(K)M-14	95(K)M-12-2	95(K)M-12-1	95(K)M-11-2
120	120(K)M-10-2	120(K)M-10-1	120(K)M-14	120(K)M-12-2	120(K)M-12-1	120(K)M-11-2
150	150(K)M-10-2	150(K)M-10-1	150(K)M-14	150(K)M-12-2	150(K)M-12-1	150(K)M-11-2
185	185(K)M-10-2	185(K)M-10-1	185(K)M-14	185(K)M-12-2	185(K)M-12-1	185(K)M-11-2
240	240(K)M-10-2	240(K)M-10-1	240(K)M-14	240(K)M-12-2	240(K)M-12-1	240(K)M-11-2
300	300(K)M-10-2	300(K)M-10-1	300(K)M-14	300(K)M-12-2	300(K)M-12-1	300(K)M-11-2
400	400(K)M-10-2	400(K)M-10-1	400(K)M-14	400(K)M-12-2	400(K)M-12-1	400(K)M-11-2
500	500(K)M-10-2	500(K)M-10-1	500(K)M-14	500(K)M-12-2	500(K)M-12-1	500(K)M-11-2
630	630(K)M-10-2	630(K)M-10-1	630(K)M-14	-	630(K)M-12-1	630(K)M-11-2



For use with copper wire screened cables. No earthing device is necessary.



For use with copper tape screened cables. Order: Kit MT.



For use with fabric tape (graphite) screened cables. Order additional semi-conductive tape (type TSC).



For use with other cable types. Please contact our representative.



For outdoor applications. Order: +MWS.



Components can be ordered individually.

750S1, 775S1 & 775T1 INTERFACE E - 5/8" EQUIPMENT BUSHING

**Up to 36 kV
800 A & 1250 A**

6/10 (12) kV
6.35/11 (12) kV
8.7/15 (17.5) kV
12/20 (24) kV
12.7/22 (24) kV
18/30 (36) kV

Application

For use in equipment insulated with oil fluid, typically for transformers, switchgear, capacitors...

Technical characteristics

Each bushing is tested for AC withstand and partial discharge prior to leaving the factory.

Design


The equipment bushing is a moulded epoxy insulated part in accordance with ANSI/IEEE 386 std. (5/8" threading system).

Specifications and standards

The bolted type equipment bushings 750S1, 775S1 and 775T1 meet the requirements of IEC 60137.

Ordering instructions

To order the equipment bushing, specify the type.

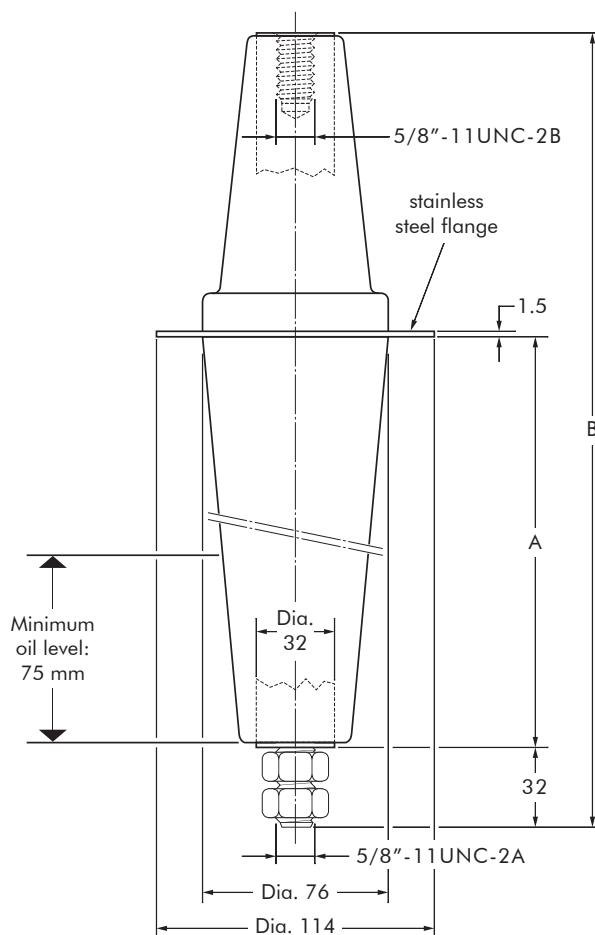



In mm, except where noted.

Equipment bushing type	Voltage U_r (kV)	Current I_r (A)	Dimensions (mm)	
			A	B
750S1	36	800	75	235
775S1	36	1250	75	235
775T1	36	1250	221	378

04/2012

FIXINGS FOR EQUIPMENT BUSHINGS

750S1, 775S1 and 775T1 bushings

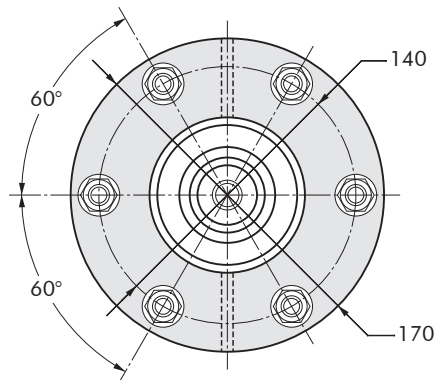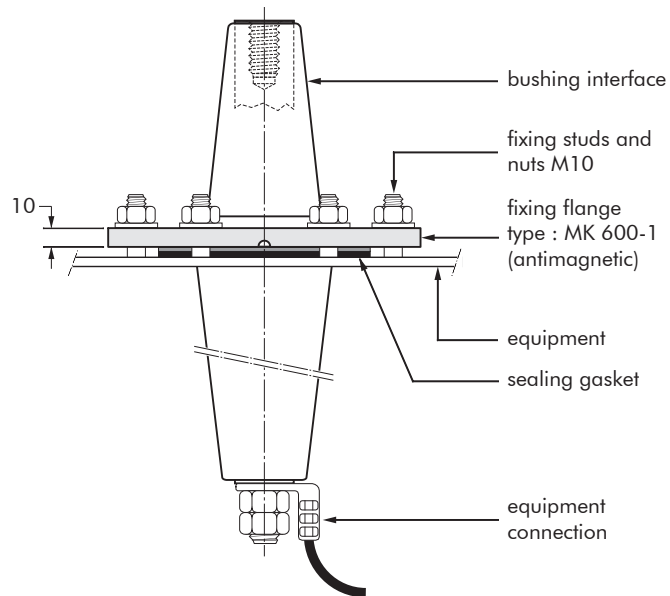

Bushing fixing flange

To order the bushing fixing flange, simply specify MK600-1.

SECTION
12.3

L.V. FUSE SWITCH:
SOCOMEK 160A

(PRODUCT CATALOGUE - 30 PAGES)





FUSERBLOC

Fuse combination switches
for industrial fuses up to 1250 A

Fuse protection



The solution for

- > Motor load break
- > Protection of industrial cabinet



Strong points

- > Improved safety
- > High breaking capacity
- > Specific functionalities for simplified use

A complete range.

- > Centred or left side operation, rear connections, plug-in connections. Please consult us.

Conformity to standards

- > IEC 60947-3
- > EN 60947-3
- > BS EN 60947-3
- > NBN EN 60947-3
- > IEC 60269-1
- > DIN EN 60269-1
- > NF EN 60269-1
- > IEC 60269-2
- > VDE 0636-1
- > VDE 0660-107
- > Standards UL: see FUSERBLOC UL



Approvals and certifications⁽¹⁾



⁽¹⁾ Product reference on request.

Function

FUSERBLOC are manually operated multipolar fuse combination switches. They make and break on load and provide safety isolation and protection against overcurrent for any low voltage electrical circuit.

Advantages

Improved safety

- Complete isolation of the fuse with double breaking per pole (top and bottom of fuse).
- Positive break indication.
- IP2X protection with terminal shrouds front panel.



Specific functionalities for simplified use

- TEST position for testing control circuits without power using U-type auxiliary contacts. In TEST position, the enclosure door can be opened.
- Mechanical or electronic fuse melting detection system (see DDMM or FMD).

High breaking capacity

Protection against overloads and short-circuits thanks to high breaking capacity fuses (100 kA rms).

Customised solutions



What you need to know

- In addition to the FUSERBLOC rating, product selection also depends on the fuse characteristics and functional specifications, which need to be in accordance with the application. SOCOMEC FUSERBLOC are available for utilisation with **NFC, DIN or BS88 fuses**.

- Whether it is 3 pole + switched neutral or 3 pole + solid neutral, the **FUSERBLOC 20 to 32 A** with **direct front operation** and **external operation** is the best suited solution in compact design.



fuser_705_a_1_cat

- From 32 to 400 A, the FUSERBLOC is available in 2, 3 or 4 poles with **direct right side operation**.




- From 630 to 1250 A, the FUSERBLOC allows **direct and external front left or right side operation** in 2, 3 or 4 poles.



fuser_706_a_2_cat

fuser_704_a_1_cat

- With external operation, it is possible to operate the device in 3 ways:
 - **Front operation**
 - **Right side operation**
 - **Left side operation**.

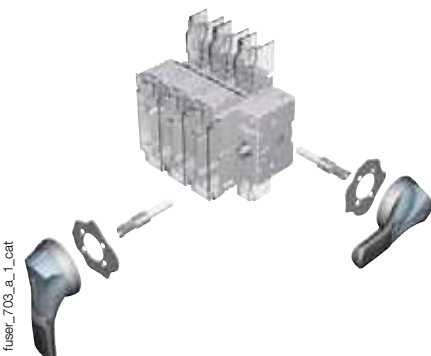

fuser_703_a_1_cat

- For ratings 20 to 400 A, the **flat mounting kit** provides a compact solution ideally suited to withdrawable applications.



fuser_702_a_2_cat

- Maintenance of outputs from the DC common bus. The **FUSERBLOC LMDC** is the most compact solution and the most economical for your maintenance requirements (please consult us).



fuser-lm_002_a

FUSERBLOC

Fuse combination switches

for industrial fuses up to 1250 A

References

BS 88 - External front and side operation - 20 to 160 A

Rating (A) Fuse size Frame size	Number of poles	Reference Switch I-0	Reference Changeover I - 0 - II	External front handle I-0	TEST External front handle I-0 TEST	External right side handle I - 0	Changeover external front handle I - 0 - II	Shaft extensions for handle	Terminal shrouds ⁽³⁾	U type A/C ⁽²⁾	Integrated solid neutral link
20 A A1 0	3 P	3641 3000	3680 3000					320 mm 1401 0532			
	3 P + switched neutral	3641 4000	3680 4000								
	3 P+solid neutral	3641 5000									
CD 32 A A1 0	3 P	3641 3001	3680 3001	Black S1 type IP55 1411 2111 ⁽¹⁾	Black S1 type IP65 1413 2115 ⁽¹⁾	Black S1 type IP55 1415 2111 ⁽¹⁾	Black S1 type IP55 1411 2113 ⁽¹⁾				
	3 P + switched neutral	3641 4001	3680 4001								
	3 P + solid neutral	3641 5001									
32 A A1 11	2 P	3841 2003		Red/Yellow S1 type 1414 2111	Red/Yellow S1 type IP65 1414 2115	Red/Yellow S1 type IP65 1418 2111	Red/Yellow S1 type IP65 1414 2113		Standard		
	3 P	3841 3003	3880 3003								
	4 P	3841 6003	3880 6003								
63 A A2-A3 12	2 P	3841 2006								1 contact NO 3999 0701	
	3 P	3841 3006	3880 3006								
	4 P	3841 6006	3880 6006								
100 A A4 ⁽⁴⁾ 13	2 P	3841 2010						320 mm 1400 1032		1 contact NC 3999 0702	3829 9310
	3 P	3841 3010	3880 3010								
	4 P	3841 6010	3880 6010								
CD 160 A A3-A4 ⁽⁴⁾ 13 A	2 P	3841 2014		Black S2 type IP55 1421 2111 ⁽¹⁾	Black S2 type IP65 1423 2115 ⁽¹⁾	Black S2 type IP55 1425 2111 ⁽¹⁾	Black S2 type IP55 1421 2113 ⁽¹⁾				
	3 P	3841 3014	3880 3014								
	4 P	3841 6014	3880 6014								
160 A A4 14	2 P	3841 2015		Red/Yellow S2 type IP65 1424 2111	Red/Yellow S2 type IP65 1424 2115	Red/Yellow S2 type IP65 1428 2111	Red/Yellow IP65 1424 2113				3829 9320
	3 P	3841 3015	3880 3015								
	4 P	3841 6015	3880 6015								
160 A B1-B2 14	2 P	3841 2016									
	3 P	3841 3016	3880 3016								
	4 P	3841 6016	3880 6016								

(1) Standard.

(2) 4 auxiliary contacts as standard without additional contact holder.

(3) Top/bottom.

(4) For fuse size A4: max diameter 31 mm.

BS 88 - External front and side operation - 200 to 1250 A

Rating (A) Fuse size Frame size	Number of poles	Reference Switch I-0	Reference Changeover I - 0 - II	External front handle I-0	TEST External front handle I-0 TEST	External right side handle I -0	Changeover external front handle I - 0 - II	Shaft extensions for handle	Terminal shrouds ⁽³⁾	U type A/C ⁽²⁾	Integrated solid neutral link									
CD 200 A A3-A4 (5) 13 A	2 P	3841 2019		Black S2 type IP55 1421 2111 ⁽¹⁾ Red/Yellow S2 type IP65 1424 2111	Black S2 type IP65 1423 2115 ⁽¹⁾ Red/Yellow S2 type IP65 1424 2115	Black S2 type IP55 1425 2111 ⁽¹⁾ Red/Yellow S2 type IP65 1428 2111	Black S2 type IP55 1421 2113 ⁽¹⁾ Red/Yellow S2 type IP65 1424 2113	320 mm 1400 1032	2 P 3998 2016		3829 9320									
	3 P	3841 3019	3880 3019						3 P 3998 3016											
	4 P	3841 6019	3880 6019						4 P 3998 4016											
200 A B1-B2 15	2 P	3841 2021							2 P 3998 2025											
	3 P	3841 3021	3880 3021						3 P 3998 3025											
	4 P	3841 6021	3880 6021						4 P 3998 4025											
250 A B1-B2-B3 15	2 P	3841 2024						Black S3 type IP65 1433 3111 ⁽¹⁾ Red/Yellow S3 type IP65 1434 3111	Black S3 type IP65 1437 3111 ⁽¹⁾ Red/Yellow S3 type IP65 1438 3111		320 mm 1400 1232	2 P 3998 2025	1 contact NO 3999 0701 1 contact NC 3999 0702	3829 9325						
	3 P	3841 3024	3880 3024									3 P 3998 3025								
	4 P	3841 6024	3880 6024									4 P 3998 4025								
315 A B1-B2-B3 16	2 P	3841 2031										Black S4 type IP65 1443 3111 ⁽¹⁾						2 P 3898 2040	3829 9339	
	3 P	3841 3031	3880 3032 ⁽⁶⁾															3 P 3898 3040		
	4 P	3841 6031	3880 6032 ⁽⁶⁾															4 P 3898 4040		
400 A B1-B2- B3-B4 16	2 P	3841 2038		Black S3 type IP65 1433 3111 ⁽¹⁾ Red/Yellow S3 type IP65 1434 3111	Black S3 type IP65 1437 3111 ⁽¹⁾ Red/Yellow S3 type IP65 1438 3111		320 mm 1400 1232											2 P 3898 2080		3829 9308
	3 P	3841 3038																3 P 3898 3080		
	4 P	3841 6038																4 P 3898 4080		
630 A C1-C2 17	2 P	3821 2063										Black S4 type IP65 1443 3111 ⁽¹⁾						2 P 3898 2120	3829 9312	
	3 P	3821 3063																3 P 3898 3120		
	4 P	3821 6063																4 P 3898 4120		
800 A C1-C2-C3 17	2 P	3821 2080						Black S4 type IP65 1443 3111 ⁽¹⁾					2 P 3898 2120	3829 9312						
	3 P	3821 3080											3 P 3898 3120							
	4 P	3821 6080											4 P 3898 4120							
1250 A D1 18	2 P	3821 2120										Black S4 type IP65 1443 3111 ⁽¹⁾					2 P 3898 2120	3829 9312		
	3 P	3821 3120															3 P 3898 3120			
	4 P	3821 6120															4 P 3898 4120			

(1) Standard.

(2) 4 auxiliary contacts as standard without additional contact holder.

(3) Top/bottom.

(4) 8 AC as standard without support (the support is for 8 additional auxiliary contacts).

(5) For fuse size A4: max diameter 31 mm.

(6) Terminal shrouds: 3 P - 3998 3025, 4 P - 3998 4025.

FUSERBLOC

Fuse combination switches

for industrial fuses up to 1250 A

References (continued)

BS 88 - Direct operation - 20 to 160 A

Rating (A) Fuse size Frame size	Number of poles	Reference Side direct operation	Reference Direct front operation	Side direct handle	Direct front handle	Auxiliary contacts	Terminal shrouds ⁽³⁾	Cage terminals	Handle key interlocking accessories ⁽²⁾						
20 A A1 0	3 P		3641 3000	Black 3629 4012	Black 3629 4012	1 contact NO/NC A-type 3999 0001 ⁽¹⁾	Standard	Standard							
	3 P + switched neutral		3641 4000												
	3 P + solid neutral		3641 5000												
CD 32 A A1 0	3 P		3641 3001			Black 3629 4012				Black 3629 4012	2 contacts NO/NC A-type 3999 0002 ⁽¹⁾	Standard	Standard		
	3 P + switched neutral		3641 4001												
	3 P + solid neutral		3641 5001												
32 A A1 1	2 P	3625 2003	consult us	Black 3629 7900	Black 3629 7900		Standard	Standard	3629 7903						
	3 P	3625 3003	consult us												
	4 P	3625 6003	consult us												
63 A A2-A3 2	2 P	3625 2006	consult us							Black 3629 7900	Black 3629 7900		Standard	Standard	3629 7903
	3 P	3625 3006	consult us												
	4 P	3625 6006	consult us												
100 A A4 ⁽⁴⁾ 3	2 P	3625 2010	consult us	Black 3629 7901	Black 3629 7901	1 contact NO/NC A-type 3999 0021 ⁽¹⁾	Standard	Standard	3629 7913						
	3 P	3625 3010	consult us												
	4 P	3625 6010	consult us												
CD 160 A A3-A4 ⁽⁴⁾ 3 A	2 P	3625 2014	consult us							Black 3629 7901	Black 3629 7901	2 contacts NO/NC A-type 3999 0022 ⁽¹⁾	2 P 3998 2016 3 P 5400 3016 4 P 5400 4016	3 P 5400 3016 4 P 5400 4016	3629 7913
	3 P	3625 3014	consult us												
	4 P	3625 6014	consult us												
160 A A4 4	2 P	3625 2015	consult us	Black 3629 7901	Black 3629 7901	2 contacts NO/NC A-type 3999 0022 ⁽¹⁾	2 P 3998 2016 3 P 5400 3016 4 P 5400 4016	3 P 5400 3016 4 P 5400 4016	3629 7913						
	3 P	3625 3015	consult us												
	4 P	3625 6015	consult us												
160 A B1-B2 4	2 P	3625 2016	consult us							Black 3629 7901	Black 3629 7901	2 contacts NO/NC A-type 3999 0022 ⁽¹⁾	2 P 3998 2016 3 P 5400 3016 4 P 5400 4016	3 P 5400 3016 4 P 5400 4016	3629 7913
	3 P	3625 3016	consult us												
	4 P	3625 6016	consult us												

(1) Max. 2 contacts.

(2) Lock not included.

(3) Top/bottom.

(4) For fuse size A4: max diameter 31 mm.

BS 88 - Direct operation - 200 to 400 A

Rating (A) Fuse size Frame size	Number of poles	Reference Side direct operation	Reference Direct front operation	Side direct handle	Direct front handle	Auxiliary contacts	Terminal shrouds ⁽³⁾	Cage terminals	Handle key interlocking accessories ⁽²⁾
CD 200 A A3-A4 ⁽⁴⁾ 13 A	2 P	3625 2019	consult us	Black 3629 7901	consult us	1 contact NO/NC A-type 3999 0021 ⁽¹⁾ 2 contacts NO/NC A-type 3999 0022 ⁽¹⁾	2 P 3998 2016 3 P 3998 3016 4 P 3998 4016	3 P 5400 3016 4 P 5400 4016	3629 7913
	3 P	3625 3019	consult us						
	4 P	3625 6019	consult us						
200 A B1-B2 5	2 P	3625 2021	consult us						
	3 P	3625 3021	consult us						
	4 P	3625 6021	consult us						
250 A B1-B2-B3 5	2 P	3625 2024	consult us						
	3 P	3625 3024	consult us						
	4 P	3625 6024	consult us						
315 A B1-B2-B3 6	2 P	3625 2032	consult us						
	3 P	3625 3032	consult us						
	4 P	3625 6032	consult us						
400 A B1-B2-B3-B4 6	2 P	3625 2039	consult us						
	3 P	3625 3039	consult us						
	4 P	3625 6039	consult us						

(1) Max. 2 contacts.

(2) Lock not included.

(3) Top/bottom.

(4) For fuse size A4: max diameter 31 mm.

BS 88 - Direct operation - 630 to 1250 A

Rating (A) Fuse size Frame size	Number of poles	Reference Side direct operation	Reference Direct front operation	Side direct handle	Direct front handle	Auxiliary contacts	Terminal shrouds ⁽³⁾	Cage terminals	Handle key interlocking accessories ⁽²⁾	
630 A C1-C2 17	2 P	3821 2063	3821 2063	Black 3899 7911	Black 3899 6011	1 contact NO U-type 3999 0701 ⁽¹⁾	2 P 3898 2080 3 P 3898 3080 4 P 3898 4080			
	3 P	3821 3063	3821 3063							
	4 P	3821 6063	3821 6063							
800 A C1-C2-C3 17	2 P	3821 2080	3821 2080				Black 3899 7011		1 contact NC U-type 3999 0702 ⁽¹⁾	3898 2120 3898 3120 3898 4120
	3 P	3821 3080	3821 3080							
	4 P	3821 6080	3821 6080							
1250 A D1 18	2 P	3821 2120	3821 2120							
	3 P	3821 3120	3821 3120							
	4 P	3821 6120	3821 6120							

(1) Max. number of U-type auxiliary contacts is 8.

(2) Lock not included.

(3) Top/bottom.

FUSERBLOC

Fuse combination switches

for industrial fuses up to 1250 A

References

NFC and DIN - External front and right side operation - 25 to 125 A

Rating (A) / Fuse / Frame size	No. of poles	Switch I-O-TEST	Changeover switch I-O-II	External front handle	TEST external front handle	External right side handle	Changeover external front handle	Shaft for external handle	Auxiliary contacts ⁽²⁾	Terminal shrouds ⁽¹⁾	Integrated solid neutral link		
25 A 10 x 38 0	3 P	3631 3002 ⁽¹⁾	3670 3002	S1 type	S1 type								
	3 P + switched neutral	3631 4002 ⁽¹⁾	3670 4002										
	3 P + solid neutral	3631 5002 ⁽¹⁾											
CD 32 A 10 x 38 0	3 P	3631 3003	3670 3003	Black IP55	Black IP65	S1 type	S1 type	320 mm 1401 0532	U-type 1 contact 3999 0710				
	3 P + switched neutral	3631 4003	3670 4003	1411 2111	1413 2115								
	3 P + solid neutral	3631 5003		Red/Yellow IP65 1414 2111	Red/Yellow IP65 1414 2115								
32 A 14 x 51 0	3 P	3631 3004 ⁽¹⁾	3670 3004			Black IP55 1415 2111	Black IP55 1411 2113						
	3 P + switched neutral	3631 4004 ⁽¹⁾	3670 4004									Red/Yellow IP65 1418 2111	Red/Yellow IP65 1414 2113
	3 P + solid neutral	3631 5004 ⁽¹⁾											
50 A 14 x 51 11	2 P	3831 2005		S1 type	S1 type					Standard			
	3 P	3831 3005 ⁽¹⁾	3870 3005									Black IP65 1411 2111	Black IP65 1413 2115
	4 P	3831 6005 ⁽¹⁾	3870 6005										
63 A 00C 12	2 P	3831 2006		Red/Yellow IP65 1414 2111	Red/Yellow IP65 1414 2115								
	3 P	3831 3006 ⁽¹⁾	3870 3006										
	4 P	3831 6006 ⁽¹⁾	3870 6006										
100 A 22 x 58 13	2 P	3831 2010		S2 type	S2 type	S2 type	S2 type	320 mm 1400 1032 ⁽²⁾	U-type 1 contact 3999 0600				
	3 P	3831 3010 ⁽¹⁾	3870 3010										
	4 P	3831 6010 ⁽¹⁾	3870 6010										
125 A 22 x 58 13	2 P	3831 2011		Black IP65 1421 2111	Black IP55 1423 2115	Black IP55 1425 2111	Black IP55 1421 2113			2 P 3998 2016 3 P 3998 3016 4 P 3998 4016	3829 9310		
	3 P	3831 3011	3870 3011	Red/Yellow IP65 1424 2111	Red/Yellow IP65 1424 2115	Red/Yellow IP65 1428 2111	Red/Yellow IP65 1424 2113						
	4 P	3831 6011	3870 6011										
125 A 00 13	2 P	3831 2012											
	3 P	3831 3012	3870 3012										
	4 P	3831 6012	3870 6012										

(1) Available enclosed (see page "Enclosed fuse switches" page XXX).

(2) Top/bottom.

(3) Maximum 4 contacts.

NFC and DIN - External front and right side operation - 160 to 1250 A

Rating (A) / Fuse / Frame size	No. of poles	Switch I-0	Changeover switch I-0-II	External front handle	TEST external front handle	External right side handle	Changeover external front handle	Shaft for external handle	Auxiliary contacts	Terminal shrouds ⁽²⁾	Integrated solid neutral link	
160 A 00 13	2 P	3831 2015							U-type	2 P 3998 2016 3 P 3998 3016 4 P 3998 4016	3829 9320	
	3 P	3831 3015	3870 3015									
	4 P	3831 6015	3870 6015									
160 A 0 14	2 P	3831 2016		S2 type	S2 type	S2 type	S2 type	320 mm 1400 1032	1 contact 3999 0600 ⁽³⁾	2 P 3998 2025 3 P 3998 3025 4 P 3998 4025	3829 9325	
	3 P	3831 3016 ⁽¹⁾	3870 3016	Black IP65 1421 2111	Black IP65 1423 2115	Black IP65 1425 2111	Black IP65 1421 2113					
	4 P	3831 6016 ⁽¹⁾	3870 6016	Red/Yellow IP65 1424 2111	Red/Yellow IP65 1424 2115	Red/Yellow IP65 1428 2111	Red/Yellow IP65 1424 2113					
250 A 1 15	2 P	3831 2024		Red/Yellow IP65 1424 2111	Red/Yellow IP65 1424 2115	Red/Yellow IP65 1428 2111	Red/Yellow IP65 1424 2113		U-type	2 P 3898 2040 3 P 3898 3040 4 P 3898 4040	3829 9339	
	3 P	3831 3024 ⁽¹⁾	3870 3024									
	4 P	3831 6024 ⁽¹⁾	3870 6024									
400 A 2 16	2 P	3831 2038							1 contact 3999 0600 ⁽⁴⁾	2 P 3898 2040 3 P 3898 3040 4 P 3898 4040	3829 9339	
	3 P	3831 3038 ⁽¹⁾	3870 3039 ⁽⁵⁾									
	4 P	3831 6038 ⁽¹⁾	3870 6039 ⁽⁵⁾									
630 A 3 17	2 P	3811 2063		S3 type						2 P 3898 2080 3 P 3898 3080 4 P 3898 4080	3829 9308	
	3 P	3811 3063 ⁽¹⁾		Black IP65 1433 3111								
	4 P	3811 6063 ⁽¹⁾										
800 A 3 17	2 P	3811 2080		Red/Yellow IP65 1434 3111		S3 type				2 P 3898 2120 3 P 3898 3120 4 P 3898 4120	3829 9312	
	3 P	3811 3080										Black IP65 1437 3111
	4 P	3811 6080										
800 A 4 18	2 P	3811 2081		S4 type						2 P 3898 2120 3 P 3898 3120 4 P 3898 4120	3829 9312	
	3 P	3811 3081		Black IP65 1443 3111								
	4 P	3811 6081										
1250 A 4 18	2 P	3811 2120		Red/Yellow IP65 1444 3111						2 P 3898 2120 3 P 3898 3120 4 P 3898 4120	3829 9312	
	3 P	3811 3120										
	4 P	3811 6120										

(1) Available enclosed (see "Enclosed fuse switches" page XXX).

(2) Top/bottom.

(3) Maximum 4 contacts.

(4) Maximum 8 contacts.

(5) Terminal shrouds: 3 P - 3998 3025, 4 P - 3998 4025.

FUSERBLOC

Fuse combination switches

for industrial fuses up to 1250 A

References (continued)

NFC and DIN - Direct operation - 25 to 125 A

Rating (A) Fuse size Frame size	No. of poles	Direct side operation	Direct front operation	Direct handle	Auxiliary contacts	Terminal shrouds	Cage terminals	Lock for fuse protection cover	Handle key interlocking accessories ⁽⁶⁾				
25 A 10 x 38 0	3 P		3631 3002	Black 3629 4012 ⁽¹⁾⁽²⁾	A-type 1 contact NO/NC 3999 0001 ⁽³⁾ A-type 2 contacts NO/NC 3999 0002 ⁽³⁾	Standard	Standard	Standard					
	3 P + switched neutral		3631 4002										
	3 P + solid neutral		3631 5002										
CD 32 A 10 x 38 0	3 P		3631 3003										
	3 P + switched neutral		3631 4003										
	3 P + solid neutral		3631 5003										
32 A 14 x 51 0	3 P		3631 3004										
	3 P + switched neutral		3631 4004										
	3 P + solid neutral		3631 5004										
50 A 14 x 51 1	2 P	3615 2005	consult us	Black 3629 7900 ⁽⁵⁾⁽²⁾	A-type 1 contact NO/NC 3999 0021 ⁽³⁾ A-type 2 contacts NO/NC 3999 0022 ⁽³⁾	Standard	Standard	3629 7903					
	3 P	3615 3005	consult us										
	4 P	3615 6005	consult us										
63 A 00C 2	2 P	3615 2006	consult us										
	3 P	3615 3006	consult us										
	4 P	3615 6006	consult us										
100 A 22 x 58 3	2 P	3615 2010	consult us						Black 3629 7901 ⁽⁵⁾⁽²⁾	A-type 1 contact NO/NC 3999 0021 ⁽³⁾ A-type 2 contacts NO/NC 3999 0022 ⁽³⁾	Standard	Standard	3629 7913
	3 P	3615 3010	consult us										
	4 P	3615 6010	consult us										
125 A 22 x 58 3	2 P	3615 2011	consult us										
	3 P	3615 3011	consult us										
	4 P	3615 6011	consult us										
125 A 00 3	2 P	3615 2012	consult us	Black 3629 7901 ⁽⁵⁾⁽²⁾	A-type 1 contact NO/NC 3999 0021 ⁽³⁾ A-type 2 contacts NO/NC 3999 0022 ⁽³⁾	Standard	Standard	3629 7913					
	3 P	3615 3012	consult us										
	4 P	3615 6012	consult us										

(1) Direct front operation.

(2) Standard.

(3) Maximum 2 contacts.

(4) Top or bottom.

(5) Direct right side operation.

(6) Locking using RONIS EL11AP lock (lock not included).

NFC and DIN - Direct operation - 160 to 400 A

Rating (A) Fuse size Frame size	No. of poles	Direct side operation	Direct front operation	Direct handle	Auxiliary contacts	Terminal shrouds	Cage terminals	Lock for fuse protection cover	Handle key interlocking accessories ⁽⁵⁾	
160 A 00 3	2 P	3615 2015	consult us	Black 3629 7901 ⁽⁴⁾⁽¹⁾		2 P 3998 2016 ⁽³⁾	3 P 5400 3016	3999 8912	3629 7913	
	3 P	3615 3015	consult us			3 P 3998 3016 ⁽³⁾				3999 8216
	4 P	3615 6015	consult us			4 P 3998 4016 ⁽³⁾				3999 8316
160 A 0 4	2 P	3615 2016	consult us	Black 3629 7901 ⁽⁴⁾⁽¹⁾	A-type 1 contact NO/NC 3999 0021 ⁽²⁾	2 P 3998 2025 ⁽³⁾	4 P 5400 4016	3999 8416		
	3 P	3615 3016	consult us				3 P 5400 3025	3999 8225		
	4 P	3615 6016	consult us				4 P 5400 4025	3999 8325		
250 A 1 5	2 P	3615 2024	consult us	Black 3629 7901 ⁽⁴⁾⁽¹⁾	A-type 2 contacts NO/NC 3999 0022 ⁽²⁾	3 P 3998 3025 ⁽³⁾	3 P 5400 3025	3999 8425		
	3 P	3615 3024	consult us				4 P 5400 4025	3999 8240		
	4 P	3615 6024	consult us				3 P 5400 3040	3999 8340		
400 A 2 6	2 P	3615 2039	consult us	Black 3629 7901 ⁽⁴⁾⁽¹⁾		4 P 3998 4025 ⁽³⁾	4 P 5400 4040	3999 8440		
	3 P	3615 3039	consult us							
	4 P	3615 6039	consult us							

(1) Standard.

(2) Maximum 2 contacts.

(3) Top/bottom.

(4) Direct right side operation.

(5) Locking using RONIS EL11AP lock (lock not included).

NFC and DIN - Direct operation - 630 to 1250 A

Rating (A) Fuse size Frame size	No. of poles	Direct side and front operation	Direct front handle	Direct side handle	Auxiliary contacts	Terminal shrouds
630 A 3 17	2 P	3811 2063	Black 3899 6011 ⁽¹⁾⁽²⁾			2 P 3898 2080 ⁽³⁾
	3 P	3811 3063				3 P 3898 3080 ⁽³⁾
	4 P	3811 6063				4 P 3898 4080 ⁽³⁾
800 A 3 17	2 P	3811 2080	Black 3899 7911		U-type 1 contact NO 3999 0701 ⁽⁴⁾	3 P 3898 3080 ⁽³⁾
	3 P	3811 3080				4 P 3898 4080 ⁽³⁾
	4 P	3811 6080				
800 A 4 18	2 P	3811 2081	Black 3899 7011 ⁽¹⁾⁽²⁾		1 contact NC 3999 0702 ⁽⁴⁾	2 P 3898 2120 ⁽³⁾
	3 P	3811 3081				3 P 3898 3120 ⁽³⁾
	4 P	3811 6081				4 P 3898 4120 ⁽³⁾
1250 A 4 18	2 P	3811 2120	Black 3899 7011 ⁽¹⁾⁽²⁾			2 P 3898 2120 ⁽³⁾
	3 P	3811 3120				3 P 3898 3120 ⁽³⁾
	4 P	3811 6120				4 P 3898 4120 ⁽³⁾

(1) Direct front operation.

(2) Standard.

(3) Top/bottom.

(4) Maximum 8 contacts.

FUSERBLOC

Fuse combination switches


for industrial fuses up to 1250 A

Accessories

Direct operation handle

For front operation				
Rating (A)	Frame size	Figure no.	Handle colour	Reference
20 ... 32	0	1	Black	3629 4012
20 ... 32	0	1	Red	3629 4013
32 ... 400	11 ... 16	2	Black	3629 7910
630 ... 800	17	2	Black	3899 6011
800 ... 1250	18	3	Black	3899 7011

For right side operation				
Rating (A)	Frame size	Figure no.	Handle colour	Reference
32 ... 63	1/2	4	Black	3629 7900
100 ... 400	3 ... 6	4	Black	3629 7901
630 ... 1250	17 ... 18	5	Black	1437 7911

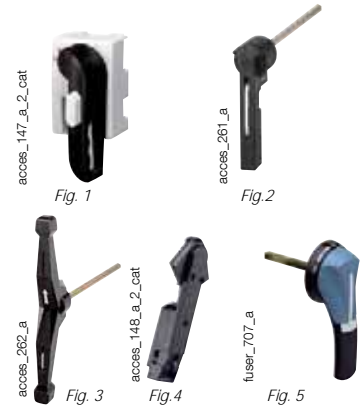

External front operation handle

Padlockable handle in position 0							
Rating (A)	Frame size	Handle type	Handle colour	Operation	External IP ⁽¹⁾	Defeatable handle	Reference
CD 25 ... 63	0/11/12	S1	Black	I - 0	IP55	Yes	1411 2111
CD 25 ... 63	0/11/12	S1	Black	I - 0	IP65	Yes	1413 2111
CD 25 ... 63	0/11/12	S1	Red/Yellow	I - 0	IP65	Yes	1414 2111
CD 25 ... 63	0/11/12	S1	Black	I - 0 - Test	IP65	Yes	1413 2115
CD 25 ... 63	0/11/12	S1	Red/Yellow	I - 0 - Test	IP65	Yes	1414 2115
100 ... 400	13 ... 16	S2	Black	I - 0	IP55	Yes	1421 2111
100 ... 400	13 ... 16	S2	Black	I - 0	IP65	Yes	1423 2111
100 ... 400	13 ... 16	S2	Red/Yellow	I - 0	IP65	Yes	1424 2111
100 ... 400	13 ... 16	S2	Black	I - 0 - Test	IP55	Yes	1423 2115
100 ... 400	13 ... 16	S2	Red/Yellow	I - 0 - Test	IP65	Yes	1424 2115
630 ... 800	17	S3	Black	I - 0	IP65	Yes	1433 3111
630 ... 800	17	S3	Red/Yellow	I - 0	IP65	Yes	1434 3111
800 ... 1250	18	S4	Black	I - 0	IP65	Yes	1443 3111
800 ... 1250	18	S4	Red/Yellow	I - 0	IP65	Yes	1444 3111

(1) IP: protection degree according to IEC 60529 standard.

Padlockable handle in position 0 and I					
Rating (A)	Frame size	Handle type	Handle colour	External IP ⁽¹⁾	Reference
CD 25 ... 63	0/11/12	S1	Black	IP65	1413 2311
100 ... 400	13 ... 16	S2	Black	IP65	1423 2311

(1) IP: protection degree according to IEC 60529 standard.



External right side operation handle

Rating (A)	Frame size	Handle type	Handle colour	External IP ⁽¹⁾	Reference
CD 25 ... 63	0/11/12	S1	Black	IP55	1415 2111
CD 25 ... 63	0/11/12	S1	Black	IP65	1417 2111
CD 25 ... 63	0/11/12	S1	Red/Yellow	IP65	1418 2111
100 ... 400	13 ... 16	S2	Black	IP55	1425 2111
100 ... 400	13 ... 16	S2	Black	IP65	1427 2111
100 ... 400	13 ... 16	S2	Red/Yellow	IP65	1428 2111
630 ... 1250	17/18	S3	Black	IP65	1437 3111
630 ... 1250	17/18	S3	Red/Yellow	IP65	1438 3111

(1) IP: protection degree according to IEC 60529 standard.



External front operation handle with metal padlocking lever

Rating (A)	Frame size	Handle type	Handle colour	External IP ⁽¹⁾	Defeatable handle	Reference
CD 25 ... 63	0/11/12	S1	Black	IP65	Yes	141D 2911
CD 25 ... 63	0/11/12	S1	Red/Yellow	IP65	Yes	141E 2911
100 ... 400	13 ... 16	S2	Black	IP65	Yes	142D 2911
100 ... 400	13 ... 16	S2	Red/Yellow	IP65	Yes	142E 2911
600 ... 800	17	S3	Black	IP65	Yes	143D 3911
600 ... 800	17	S3	Red/Yellow	IP65	Yes	143E 3911
800 ... 1250	18	S4	Black	IP65	Yes	144D 3911
800 ... 1250	18	S4	Red/Yellow	IP65	Yes	144E 3911

(1) IP: protection degree according to IEC 60529 standard.



S2 type handle

S3 type handle

S-type handle adapter

Use

Enables S-type handles to be fitted in place of existing older style Socomec handles.

Adapter can be utilised as a spacer to increase the distance between the panel door and the handle lever.

Dimensions

Adds 12 mm to the depth.

Handle colour	To be ordered in multiples of	External IP ⁽¹⁾	Reference
Black	1	IP65	1493 0000

(1) IP: protection degree according to IEC 60529 standard.



access_187_a_1_cat

Alternative S-type handle cover colours

Use

For single lever handles S1, S2, S3 types and double lever handle, S4 type.
Other colours: please consult us.

Handle colour	To be ordered in multiples of	Handle	Reference
Light grey	50	Type S1, S2	1401 0001
Dark grey	50	Type S1, S2	1401 0011
Light grey	50	S4 type	1401 0031
Dark grey	50	S4 type	1401 0041



access_198_a_1_cat

Flat mounting kit

Use

The flat mounting providing compact solution ideally suited to withdrawable applications.

Kit to be used with a handle for flat mounting.

Rating (A)	Frame size	Type	Reference
CD 25 ... CD 32	0	Kit + Shaft 200 mm	1429 7709
50 ... 400	11 ... 16	Kit + Shaft 200 mm	1429 7710



fuser_535_a_1_cat

Handle for flat mounting kit

Padlockable handle in position 0						
Rating (A)	Frame size	Handle type	Handle colour	External IP ⁽¹⁾	Reference	
CD 25 ... 63	0/11/12	S1	Black	IP55	1411 2111 ⁽²⁾	
CD 25 ... 63	0/11/12	S1	Red/Yellow	IP65	1414 2111 ⁽²⁾	
100 ... 400	13 ... 16	S2	Black	IP55	1421 2111 ⁽²⁾	
100 ... 400	13 ... 16	S2	Red/Yellow	IP65	1424 2111 ⁽²⁾	

(1) IP: protection degree according to IEC 60529 standard.

(2) Defeatable handle in position I.



S2 type handle.

fuser_536_a_1_cat

FUSERBLOC

Fuse combination switches

for industrial fuses up to 1250 A

Accessories (continued)

Front operation shaft support accessory

Use

This support maintains shaft position for extension shafts greater than 320 mm in length.



fuser_698_a_2_cat

Rating (A)	Frame size	Reference
50 ... 400	11 ... 16	3899 0400

Shaft guide for external operation

Use

To guide the shaft extension into the external handle.

This accessory enables the handle to engage the extension shaft with a misalignment of up to 15 mm.

Required for a shaft lengths over 320 mm.



access_260_a_2_cat

Description	Reference
Shaft guide	1429 0000

Shaft for external front operation handle

Use

Standard lengths:

- 200 mm
- 320 mm
- 400 mm
- 500 mm.

Other lengths: consult us.

Rating (A)	Frame size	Shaft length (mm)	Reference
CD 20 ... CD 32	0	200	1401 0520
CD 20 ... CD 32	0	320	1401 0532
CD 20 ... CD 32	0	400	1401 0540 ⁽¹⁾
32 ... 400	11 ... 16	200	1400 1020
32 ... 400	11 ... 16	320	1400 1032
32 ... 400	11 ... 16	500	1400 1050 ⁽²⁾
630 ... 800	17	200	1400 1220
630 ... 1250	17/18	320	1400 1232
630 ... 1250	17/18	500	1400 1250 ⁽¹⁾

(1) Use the shaft guide accessory for external operation.


(2) Use the front operation shaft support accessory.

access_145_b_1_cat



access_369_a_1_cat

access_202_a_1_x_cat



Dimension X (mm) for FUSERBLOC BS88

Rating (A)	CD 20 ... CD 32	32	63 ... 160	CD160 ... CD200	160 ... 200	250 ... 315	630 ... 800	1250
Fuse size	A1	A1	A2-A3/A4	A3-A4	B1-B2	B1-B2-B3	C1-C2-C3	D1
Frame size	0	11	12/13/14	13 A	14/15	15/16	17	18
Shaft length (mm)								
200	102 ... 245	100 ... 230	125 ... 230	150 ... 230	135 ... 230	160 ... 230	270 ... 304	
320	102 ... 365	100 ... 350	125 ... 350	150 ... 350	135 ... 350	160 ... 350	270 ... 424	304 ... 424
400	102 ... 445							
500		100 ... 530	125 ... 530	150 ... 530	135 ... 530	160 ... 530	270 ... 600	304 ... 600

Dimension X (mm) for FUSERBLOC NFC and DIN


Rating (A)	CD 25 ... CD 32	50	63	100 ... 160	160	250 ... 400	630 ... 800	800 ... 1250
Fuse size	10x38/14x51	14x51	00C	22x58/00	0	1/2	3	4
Frame size	0	11	12	13	14	15/16	17	18
Shaft length (mm)								
200	102 ... 245	100 ... 230	125 ... 230	135 ... 230	145 ... 230	160 ... 230	270 ... 304	
320	102 ... 365	100 ... 350	125 ... 350	135 ... 350	145 ... 350	160 ... 350	270 ... 424	304 ... 424
400	102 ... 445	100 ... 430	125 ... 430	135 ... 430	145 ... 430	160 ... 430	270 ... 504	304 ... 504
500		100 ... 530	125 ... 530	135 ... 530	145 ... 530	160 ... 530	270 ... 604	304 ... 604

Shaft extensions for external side operation

Use

Standard lengths, 200 mm.

Rating (A)	Frame size	Handle type	Dimension Y (mm)	Shaft length (mm)	Reference
CD 25 ... CD 32	0	S	36 ... 159	200	1401 0520
50 ... 400	11 ... 16	S	36 ... 172	200	1400 1020
630 ... 1250	17/18	S	15 ... 150	200	1400 1220

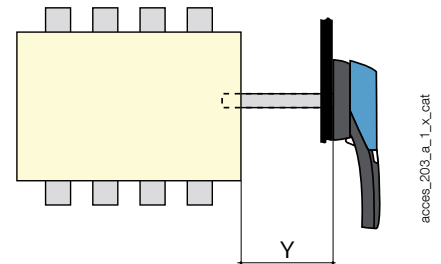

access_203_a_1_X_cat

Integrated solid neutral link

Use

Fixing the solid neutral onto the mechanism produces a device with a solid neutral of the same size as a standard three-pole device (+ 6 mm).

BS88 for external front operation			
Rating (A)	Switch body size	Bar rating (A)	Reference
100	13	125	3829 9310
CD 160 ... CD 200	13a	200	3829 9320
160	14	200	3829 9320
200 ... 250	15	250	3829 9325
315 ... 400	16	400	3829 9339
630 ... 800	17	800	3829 9308
1250	18	1250	3829 9312

NFC and DIN For external front operation			
Rating (A)	Frame size	Bar rating (A)	Reference
100 ... 125	13	125	3829 9310
160	13	160	3829 9320
160	14	200	3829 9320
250	15	250	3829 9325
400	16	400	3829 9339
630 ... 800	17	800	3829 9308
800 ... 1250	18	1250	3829 9312



Solid neutral module

BS88 for external front operation				
Rating (A)	Switch body size	I _{max} (A)	Distance (mm)	Reference
32	11	32	27	3629 9227
63	12	63	32	3629 9232
100	13	100	36	3629 9236
CD 160 ... CD 200	13 a	200	36	3629 9237
160	14	160	50	3629 9250
200 ... 250	15	250	60	3629 9260
315 ... 400	16	400	66	3629 9266
630 ... 800	17	800	94	3629 9294
1250	18	1250	120	3629 9212


NFC and DIN For external front operation				
Rating (A)	Frame size	I _{max} (A)	Distance (mm)	Reference
50	1/11	50	27	3629 9227
63	2/12	63	32	3629 9232
100 ... 160	3/13	160	36	3629 9236
160	4/14	160	50	3629 9250
250	5/15	250	60	3629 9260
400	6/16	400	60	3629 9266
630 ... 800	17	800	94	3629 9294
800 ... 1250	18	1250	120	3629 9212



Solid links

BS88 switches				
Rating (A)	Frame size	Fuse size	I _{max} (A)	Reference
32	11	A1	32	3629 9003
63	12	A2-A3	63	3629 9006
100	13	A4	160	3629 9010
CD 160	13a	A3-A4	160	3629 9010
160	14	A4	160	3629 9010
160	14	B1-B2	200	3629 9016
CD 200	13a	A3-A4	160	3629 9010
200	15	B1-B2	200	3629 9016
250	15	B1-B2-B3	315	3629 9025
315	16	B1-B2-B3	315	3629 9025
400	16	B1-B2-B3-B4	400	3629 9040
630 ... 800	17	C1-C3	800	3629 9063
1250	18	D1	1250	3629 9120

NFC and DIN switches				
Rating (A)	Frame size	Fuse size	I _{max} (A)	Reference
50	1/11	14 x 51	50	6029 0000
63	2/12	00C	160	6420 0000
100 ... 125	3/13	22 x 58	125	6039 0000
125 ... 160	3/13	00	160	6420 0000
160	4/14	0	160	6421 0000
250	5/15	1	250	6421 0001
400	6/16	2	400	6421 0002
630 ... 800	17	3	800	6421 0003
800 ... 1250	18	4	1250	6441 0005

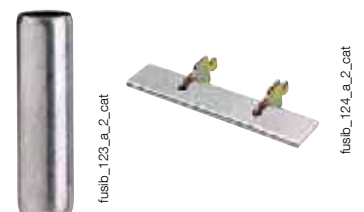

fusib_124_a_2_cat

FUSERBLOC

Fuse combination switches

for industrial fuses up to 1250 A

Accessories (continued)

A-type auxiliary contacts

Use

Pre-break and position 0 and I signalling by 1 or 2 NO /NC auxiliary contacts.
For low level use, specific auxiliary contacts: please consult us.

Connection to the control circuit

By 6.35 mm fast-on terminal.

Electrical characteristics

30 000 operations.

References

NO / NC auxiliary contacts			
Rating (A)	Frame size	Contact(s)	Reference
CD 20 ... CD 32	0	1	3999 0001
CD 20 ... CD 32	0	2	3999 0002
32 ... 400 ⁽¹⁾	1 ... 6	1	3999 0021 ⁽²⁾
32 ... 400 ⁽¹⁾	1 ... 6	2	3999 0022 ⁽²⁾

(1) Side direct operation switch only.

(2) A type auxiliary contacts cannot be mounted in conjunction with integrated solid neutral.

Characteristics

Rating (A)	Current nominal (A)	Operating current I _e (A)			
		250 VAC AC-13	400 VAC AC-13	24 VDC DC-13	48 VDC DC-13
CD 20 ... 400	16	4	2	12	2



access_046_a_1_cat

access_047_a_2_cat

U-type auxiliary contacts⁽¹⁾

Use

Compact universal type auxiliary contacts which can be configured for operation in either, or both, ON and TEST positions for CD 20 to 1250 A FUSERBLOC. Each slot can accommodate up to two interlocked A/Cs.

Connection to the control circuit

By terminals with max. section 2 x 2.5 mm².

For FUSERBLOC CD 20 to 400 A: Pre-break and signalling of positions 0, I and TEST.

For FUSERBLOC ≥ 630 A: Pre-break and position 0 and I signalling.

References

NC auxiliary contacts			
Rating (A)	Frame size	Contact(s)	Reference
CD 20 ... 1250	0 ... 18	1	3999 0702

NO auxiliary contacts			
Rating (A)	Frame size	Contact(s)	Reference
CD 20 ... 1250	0 ... 18	1	3999 0701

Contact holder for auxiliary contacts			
Rating (A)	Frame size	Contact(s)	Reference ⁽¹⁾
CD 20 ... 160	0 ... 14	4 (2 x 2 max)	included
250 ... 400	15/16	8 (4 x 2 max)	included
630 ... 1250	17/18	8 (4 x 2 max)	included

(1) Cannot be mounted in direct operation.


Contact holder for additional auxiliary contacts			
Rating (A)	Frame size	Contact(s)	Reference
CD 20 ... CD 32	0	4 (2 x 2 max)	3999 0710
32 ... 400	11 ... 16	4 (2 x 2 max)	3999 0600

Characteristics

Rating (A)	Operating current I _e (A)			
	250 VAC AC-15	400 VAC AC-15	24 VDC DC-13	48 VDC DC-13
CD 20 ... 1250	3	1.8	2.8	1.4



access_066_a_1_cat

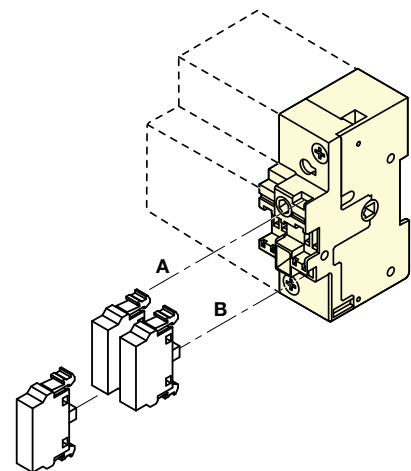

access_048_a_1_x_cat

(1) U-type auxiliary contacts cannot be mounted with an integrated solid neutral.

S and ST-type auxiliary contacts

Use

For FUSERBLOCs 32 to 1250 A, position 0 and I signalling by 1 to 4 NO + NC auxiliary contacts.

Electrical principle

The NO + NC S-type auxiliary contacts can be configured as 2 NC or 2 NO.

References

S-type auxiliary contacts 0-I for external front and right-side operation (Standard operation)				
Rating (A)	Frame size	Contact type	Reference	Drive shaft (optional) Reference
32 ... 1250	11 ... 18	NC+NO	3999 0041 ⁽¹⁾	3999 0003

ST-type auxiliary contacts I-0-TEST for external front and right-side operation (TEST operation)					
Rating (A)	Frame size	Contact type	Description	Reference	Drive shaft Reference
32 ... 400	11 ... 16	NC+NO	TEST + ON	3999 0141 ⁽²⁾	3999 0003
32 ... 400	11 ... 16	2 O	TEST + ON	3999 0241 ⁽²⁾	3999 0003

(1) Drive shaft included with Auxiliary Contact

(2) Drive shaft to be ordered separately

Characteristics

Rating (A)	Current nominal (A)	Operating current I _e (A)	
		250 VAC AC-13	400 VAC AC-13
32 ... 1250	20	10	8

Connection

By terminals with max. cross-section 10 mm².

Mechanical characteristics

30 000 operations.



access_051_a_2_cat



access_063_a_1_cat

Important:

- > For the 400 A frame size 16, an adaptation kit reference 3999 0000 must be ordered in addition to the auxiliary contact kit.

Fuse cover interlocking

Use

On NFC and DIN, side direct operation, locking of the opening of the fuse protection cover when FUSERBLOC is engaged (position I).

Rating (A)	Frame size	Fuse size	No. of poles	Reference
CD 20 ... 50	0 ... 11	10 x 38 / 14 x 51	2 / 3 / 4	included
63	12	00C	2 / 3 / 4	3999 8906
100 ... 125	13	22 x 58	2 / 3 / 4	3999 8912
125 ... 160	13	00	2 / 3 / 4	3999 8912
160	14	0	2 P	3999 8216
160	14	0	3 P	3999 8316
160	14	0	4 P	3999 8416
250	15	1	2 P	3999 8225
250	15	1	3 P	3999 8325
250	15	1	4 P	3999 8425
400	16	2	2 P	3999 8240
400	16	2	3 P	3999 8340
400	16	2	4 P	3999 8440

Terminal shrouds

Use

Top or bottom IP20 protection (on the front) against direct contact with terminals or connection parts.

Two sets required to fully shroud both incoming and outgoing terminals.

Rating (A)	Frame size	Position	No. of poles	Reference
CD 20 ... 63	0/1/2/12	top / bottom	2 / 3 / 4 P	integrated
100 ... CD 200	3/4/13/14	top / bottom	2 P	3998 2016
100 ... CD 200	3/4/13/14	top / bottom	3 P	3998 3016
100 ... CD 200	3/4/13/14	top / bottom	4 P	3998 4016
200 ... 400	5/6/15	top / bottom	2 P	3998 2025
200 ... 400	5/6/15	top / bottom	3 P	3998 3025
200 ... 400	5/6/15	top / bottom	4 P	3998 4025
315 ... 400	16	top / bottom	2 P	3898 2040
315 ... 400	16	top / bottom	3 P	3898 3040
315 ... 400	16	top / bottom	4 P	3898 4040
630 ... 800	17	top / bottom	2 P	3898 2080
630 ... 800	17	top / bottom	3 P	3898 3080
630 ... 800	17	top / bottom	4 P	3898 4080
800 ... 1250	18	top / bottom	2 P	3898 2120
800 ... 1250	18	top / bottom	3 P	3898 3120
800 ... 1250	18	top / bottom	4 P	3898 4120



fuser_314_a_1_cat

FUSERBLOC

Fuse combination switches

for industrial fuses up to 1250 A

Accessories (continued)

NFC and DIN fuse blown indication

Use

For fuse cartridge with striker
(size 14 x 51 22 x 58; 0; 1; 2; 3 and 4).

Electrical principle

A NO/NC auxiliary contact detects that the fuse has blown.

References

NO/NC type auxiliary contacts for 2 pole

Rating (A)	Frame size	Fuses	Contact(s)	Reference
50	11	14 x 51	1 st	3994 0405
100 ... 125	13	22 x 58	1 st	3994 0210
160	14	0	1 st	3994 0216
250	15/16	1-2	1 st	3994 0225
400 ⁽¹⁾	16	2	1 st	3894 0440
630	17	3	1 st	3894 1206
800 ... 1250	18	4	1 st	3894 1212

NO/NC type auxiliary contacts for 3 pole

Rating (A)	Frame size	Fuses	Contact(s)	Reference
CD 32	0	14 x 51	1 st	3994 0303
50	11	14 x 51	1 st	3994 0405
100 ... 125	13	22 x 58	1 st	3994 0310
160	14	0	1 st	3994 0316
250	15/16	1-2	1 st	3994 0325
400 ⁽¹⁾	16	2	1 st	3894 0440
630	17	3	1 st	3894 1306
800 ... 1250	18	4	1 st	3894 1312
50 ... 250	11	-	2 nd	3994 1901
400	16	2	2 nd	3994 1902
630 ... 1250	16	-	2	3994 1901

NO/NC type auxiliary contacts for 4 pole or 3 pole + neutral

Rating (A)	Frame size	Fuses	Contact(s)	Reference
50	11	14 x 51	1 st	3994 0405
100 ... 125	13	22 x 58	1 st	3994 0410
160	14	0	1 st	3994 0416
250	15/16	1-2	1 st	3994 0425
400 ⁽¹⁾	16	2	1 st	3894 0440
630	17	3	1 st	3894 1406
800 ... 1250	18	4	1 st	3894 1412
50 ... 250	11	-	2 nd	3994 1901
400	16	2	2 nd	3994 1902
630 ... 1250	16	-	2	3994 1901

(1) For front direct and external left side operation handles,
please order references 39940225 (2P), 39940325 (3P), 39940425 (4P)

Characteristics

Rating (A)	Current nominal (A)	Operating current I _e (A)			
		250 VAC AC-13	400 VAC AC-13	24 VDC DC-13	48 VDC DC-13
CD 32 ... 1250	16	4	3	12	2

Electronic fuse blown indication (FMD)

Use

Provides fuse blown indication with fuse links without fuse blown indication strikers. Suitable for use with BS88, DIN and UL type fuses.

Principle

The Fuse Melting Device (FMD) detects the operation of a fuse and provides a signal via: a relay and 1 LED (FMD10) or a bi-stable relay and 3 LEDs (FMD30).

The FMD can be DIN rail or back plate mounted close to the Fuserbloc, directly mounted on the FUSERBLOC, or it can be door mounted to provide information directly on the front of a panel.

References

For FUSERBLOC 63 to 1250A - size 000 to 4

Nb of LEDs	Operating voltage	Reference
1 (FMD10)	120 - 260 VAC	3899 1120
1 (FMD10)	380 - 690 VAC	3899 1380
3 (FMD30)	120 - 260 VAC	3899 3120
3 (FMD30)	380 - 690 VAC	3899 3380

Accessories

Accessories	Reference
Kit for connection accessories	3819 9120
Kit for connection accessories	3829 9120

Relay characteristics

Rating (A)	Relay operating current I _e (A)	
	AC-15	DC-13
63 ... 1250	2.5 A	0.2

Connection to the control circuit

6.35 mm fast-on terminal.

Mechanical characteristics

30 000 operations.



DDMM for cylindrical fuses



DDMM for NH fuses



1 LED version (FMD10)

3 LED version (FMD30)

Cage terminals

Use

Connection of bare copper cables onto the terminals (without lugs).

References

Rating max (A)	Frame size	No. of poles	Reference
CD 20 ... 63	0 ... 12	2 / 3 / 4 P	integrated
100 ... 160	13/14	3 P	5400 3016
100 ... 160	13/14	4 P	5400 4016
250	15	3 P	5400 3025
250	15	4 P	5400 4025
400	16	3 P	5400 3040
400	16	4 P	5400 4040




access_053_a_1_cat

Connections

Rating (A)	Flexible cable cross-section (mm ²)	Rigid cable cross-section (mm ²)	Flexible bar width (mm)	Stripped over (mm)
100 ... 160	16 ... 95	16 ... 95	13	22
250	16 ... 185	16 ... 185	18	27
400	50 ... 240	50 ... 300	20	34

Dimensions

Rating (A)	A	A1	C	R	ØX	X1	Z
100 ... 160	47.5	22.5	25	20	8.5	M12	10
250	62	31.5	31.5	25	10.5	M16	14
400	71.5	32	38	32	10.5	M20	15

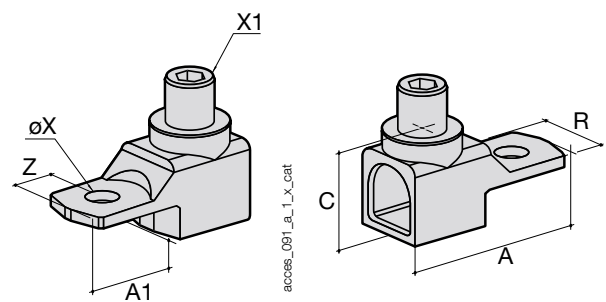

access_091_a_1_x_cat

access_092_a_1_x_cat

Handle key interlocking accessories

Use

Locking in position 0 of the direct, front or right side operation:

- using a padlock (not supplied) in direct right side operation: integrated into the handle,

- using a padlock (not supplied): right-side or front operation switch from 32 to 1250 A, factory integrated

- using a padlock (not supplied) in external operation.

Locking using RONIS EL 11 AP lock (not supplied)

Rating (A)	Frame size	Operation	Figure n°	Reference
CD 20 ... 1250	0 ... 18	external front	2	1499 7701
32 ... 63	1/2	direct	1	3629 7903
100 ... 400	3 ... 6	direct	1	3629 7913
630 ... 1250	17 ... 18	direct		3829 7923

Locking using K-type CASTELL lock (not supplied)

Rating (A)	Frame size	Operation	Figure n°	Reference
CD 20 ... 1250	0 ... 18	external front	3	1499 7702

Locking using FS-type CASTELL lock (not supplied)

Rating (A)	Frame size	Operation	Figure n°	Reference
CD 20 ... 1250	0 ... 18	external front	3	1499 7703

Locking using XOP (not supplied)

Rating (A)	Frame size	Operation	Reference
CD 20 ... 1250	0 18	external front	1499 7702




Fig. 1

access_042_a_1_x_cat




Fig. 2

access_156_a_1_x_cat




Fig. 3

access_157_a_1_x_cat

Label holder

Use

Recognisable self-adhesive label allowing identification of the devices.

Dimensions W x H (mm)	Nb of pieces in KIT	Reference
18 x 13	5	7769 9999



access_044_a_1_cat

FUSERBLOC

Fuse combination switches

for industrial fuses up to 1250 A

Characteristics according to IEC 60947-3

20 to 100 A

Thermal current I_{th} (40°C)	20 A	25 A	CD 32 A	CD 32 A	32 A	50 A	63 A	100 A
BS88/DIN fuse size	A1/-	-/10 x 38	-/10 x 38	A1/14 x 51	A1/-	-/14 x 51	A2-A3/00C	A4*/22 x 58
Frame size for direct operation	0	0	0	0	1	1	2	3
Switch body size for front and side operation	0	0	0	0	11	11	12	13
Rated insulation voltage U_i (V)	800	800	800	800	750	750	750	750
Rated impulse withstand voltage U_{imp} (kV)	8	8	8	8	8	8	8	8

Rated operational currents I_e (A)

Rated voltage	Utilisation category	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾
400 VAC	AC-22 A / AC-22 B	20/20	25/25	32/32	32/32	32/32	50/50	63/63	100/100
400 VAC	AC-23 A / AC-23 B	20/20	25/25	32/32	32/32	32/32	50/50	63/63	100/100
690 VAC	AC-22 A / AC-22 B	20/20	25/25	32/32	32/32	32/32	50/50	63/63	100 ⁽²⁾ /100 ⁽²⁾
690 VAC	AC-23 A / AC-23 B	20/20	25/25	32/32	32/32	32/32	50/50	63/63	100 ⁽²⁾ /100 ⁽²⁾
220 VDC	DC-20 A / DC-20 B			-/32		32/32	50/50	63/63	100/100
220 VDC	DC-21 A / DC-21 B		-/25 ⁽⁴⁾			32/32	40/40	40/40	100/100
440 VDC	DC-20 A / DC-20 B					32 ⁽³⁾ /32 ⁽³⁾	50 ⁽³⁾ /50 ⁽³⁾	63 ⁽³⁾ /63 ⁽³⁾	100 ⁽³⁾ /100 ⁽³⁾
440 VDC	DC-21 A / DC-21 B					32 ⁽³⁾ /32 ⁽³⁾	40 ⁽³⁾ /40 ⁽³⁾	40 ⁽³⁾ /40 ⁽³⁾	100 ⁽³⁾ / 100 ⁽³⁾

Operational power in AC-23 (kW)

At 400 VAC without pre-break in AC ⁽¹⁾⁽⁵⁾	9/9	11/11	15/15	15/15	15/15	25/25	30/30	51/51
At 690 VAC without pre-break in AC ⁽¹⁾⁽⁵⁾	15/15	22/22	25/25	25/25	25/25	45/45	55/55	90/90

Reactive power (kvar)

At 400 VAC ⁽⁵⁾	8	11	15	15	15	23	28	45
---------------------------	---	----	----	----	----	----	----	----

Fuse protected short-circuit withstand BS88/DIN (kA rms prospective)

Prospective short-circuit (kA rms) ⁽⁶⁾	80/-	-/100	-/100	80/100	80/100	-/100	80/100	80/100
Associated fuse rating (A) ⁽⁶⁾	20/-	-/25	-/32	32/32	32/32	-/50	63/63	100/100

Short-circuit capacity

Rated peak withstand current (kA peak) ⁽⁶⁾	5.5	5.5	5.5	5.5	9	7.6	10.6	20
---	-----	-----	-----	-----	---	-----	------	----

Fuse selection (maximum fuse size)**

SOCOMECS BS88 - Standard max	6A10 0020	6012 0025	6012 0032	6A10 0032	6A10 0032		6A30 0063	6A40 0100
SOCOMECS BS88 - Motor max	6A1M 0032	6013 0025	6013 0032	6A1M 0063	6A1M 0032		6A3M 0080	6A4M 0125
SOCOMECS DIN - Distribution (gl - gG)						6022 0050	6600 0063	6032 0100
SOCOMECS DIN - Motor (aM)						6023 0050	6601 0063	6033 0100
BUSSMANN - Standard max	NITD 20			NITD 32	NITD 32		BAO 63	CEO 100
BUSSMANN - Motor max	NITD 20M32			NITD 32M63	NITD 32M63		BAO 63M80	CEO 100M125
LAWSON - Standard max	NIT 20			NIT 32	NIT 32		TIS 63	TCP 100
LAWSON - Motor max	NIT 20M32				NIT 20M32		TIS 63M80	CTFP 100M125
GE - Standard max	NIT 20			NET 32	NET 32		TIS 63	TCP 100
GE - Motor max	NIT 20M32			NET 32M63	NET 32M63		TIS 63M80	OCP 100M125

Connection

Minimum Cu cable cross-section (mm ²)	2.5	2.5	2.5	2.5	6	6	10	25
Maximum Cu cable cross-section (mm ²)	16	16	16	16	25	25	25	95
Maximum busbar width (mm)								20
Min. / Max. tightening torque min (Nm)	2/-	2/-	2/3	2	2.5/3	2.5/3	2.5/3	8.3/13

Mechanical characteristics

Durability (number of operating cycles)	20 000	20 000	20 000	20 000	10 000	10 000	10 000	10 000
Weight of 3 P switch (kg)	0.48	0.48	0.48	0.50	0.80	0.80	1	1.5
Weight of 4 P switch (kg)	0.50	0.50	0.50	0.52	1	1	1.3	2
Weight of 1 P extra (kg)					0.2	0.2	0.3	0.5
Frame pitch (mm)					32	27	32	36

(1) Category with index A = frequent operation - Category with index B = infrequent operation.

(2) With terminal shrouds or terminal screen.

(3) 4-pole device with 2 pole in series by polarity.

(4) 3-pole device with 2 poles "+" in series and 1 pole "-".

(5) The power value is given for information only, the current values vary from one manufacturer to another.

(6) For a rated operational voltage $U_b = 400$ VAC.

* For fuse size A4: max diameter 31 mm.

** Please ensure that fuse let through current does not exceed short-circuit capacity of the switch (kA peak).

125 to 200 A

Thermal current I_{th} (40°C)	125 A	125 A	160 A	CD 160 A	160 A	160 A	CD 200 A	200 A
NFC/DIN fuse size	-/22 x 58	-/00	-/00	A3-A4*/-	A4/0	B1-B2/-	A3-A4*/-	B1-B2/-
Frame size for direct operation	3	3	3		4	4		5
Switch body size for front and side operation	13	13	13	13	14	14	13	15
Rated insulation voltage U_i (V)	750	750	750	750	750	750	750	750
Rated impulse withstand voltage U_{imp} (kV)	8	8	8	8	8	8	8	8

Rated operational currents I_e (A)

Rated voltage	Utilisation category	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾
400 VAC	AC-22 A / AC-22 B	125/125	125/125	160/160	160/160	160/160	160/160	200/200	200/200
400 VAC	AC-23 A / AC-23 B	125/125	125/125	160/160	160/160	160/160	160/160	200/200	200/200
690 VAC	AC-22 A / AC-22 B	125 ⁽²⁾ /125 ⁽²⁾	125 ⁽²⁾ /125 ⁽²⁾	160 ⁽²⁾ /160 ⁽²⁾	160 ⁽²⁾ /160 ⁽²⁾	160 ⁽²⁾ /160 ⁽²⁾	160 ⁽²⁾ /160 ⁽²⁾	160 ⁽²⁾ /160 ⁽²⁾	200 ⁽²⁾ /200 ⁽²⁾
690 VAC	AC-23 A / AC-23 B	100 ⁽²⁾ /100 ⁽²⁾	100 ⁽²⁾ /100 ⁽²⁾	125 ⁽²⁾ /125 ⁽²⁾	125 ⁽²⁾ /125 ⁽²⁾	125 ⁽²⁾ /125 ⁽²⁾	125 ⁽²⁾ /125 ⁽²⁾	125 ⁽²⁾ /125 ⁽²⁾	160/200 ⁽³⁾
220 VDC	DC-20 A / DC-20 B	125/125	125/125	160/160	160/160	160/160	160/160	160/160	200/200
220 VDC	DC-21 A / DC-21 B	100/100	100/100	125/125	125/125	125/125	125/125	125/125	200/200
440 VDC	DC-22 A / DC-22 B	125 ⁽³⁾ /125 ⁽³⁾	125 ⁽³⁾ /125 ⁽³⁾	160 ⁽³⁾ /160 ⁽³⁾	160 ⁽³⁾ /160 ⁽³⁾	160 ⁽³⁾ /160 ⁽³⁾	160 ⁽³⁾ /160 ⁽³⁾	160 ⁽³⁾ /160 ⁽³⁾	200 ⁽³⁾ /200 ⁽³⁾
440 VDC	DC-23 A / DC-23 B	100 ⁽³⁾ /100 ⁽³⁾	100 ⁽³⁾ /100 ⁽³⁾	125 ⁽³⁾ /125 ⁽³⁾	160 ⁽³⁾ /160 ⁽³⁾	125 ⁽³⁾ /125 ⁽³⁾	125 ⁽³⁾ /125 ⁽³⁾	125 ⁽³⁾ /125 ⁽³⁾	200 ⁽³⁾ /200 ⁽³⁾

Operational power in AC-23 (kW)

At 400 VAC without pre-break in AC ⁽¹⁾⁽⁴⁾	63/63	63/63	80/80	80/80	80/80	80/80	80/80	80/80	100/100
At 690 VAC without pre-break in AC ⁽¹⁾⁽⁴⁾	90/90	90/90	110/110	110/110	110/110	110/110	110/110	110/110	150/185

Reactive power (kvar)

At 400 VAC ⁽⁴⁾	55	55	75	70	75	75	90	90
---------------------------	----	----	----	----	----	----	----	----

Fuse protected short-circuit withstand (kA rms prospective)

Prospective short-circuit (kA rms) ⁽⁵⁾	-/100	-/100	-/100 (50)	50/-	80/100	80/100	50/-	80/-
Associated fuse rating (A) ⁽⁵⁾	-/125	-/125	-/125 (160)	160/-	160/160	160/160	200/-	200/-

Short-circuit capacity

Rated peak withstand current (kA peak) ⁽⁵⁾	20	20	20	20	22.7	22.7	20	32.5
---	----	----	----	----	------	------	----	------

Fuse selection (maximum fuse size)**

SOCOMECS BS88 - Standard max				6A40 0160	6A40 0160	6B20 0160	6A40 0200	6B20 0200
SOCOMECS BS88 - Motor max				6A4M 0160	6A4M 0160	6B1M 0200	6A4M 0315	6B2M 0315
SOCOMECS DIN - Distribution (gl - gG)	6032 0125	6692 0125	6692 0160		6702 0160			
SOCOMECS DIN - Motor (aM)	6033 0125	6693 0125	6693 0160		6703 0160			
BUSSMANN - Standard max				DEO 160	DEO 160	DD 160	DEO 200	DD 200
BUSSMANN - Motor max				CEO 100M160	DEO 100M200	CD 100M200	DEO 200M315	DD 200M315
LAWSON - Standard max				CTFP 160	TFP 160	TF 160	TF 200	TF 200
LAWSON - Motor max				CTCP 100M160	TCP 100M200	TCP 100M200	TC 200M315	TC 200M315
GE - Standard max				TCP 100	TFP 160	TF 160	TF 200	TF 200
GE - Motor max				OCP 100M160	TCP 100M201	TC 100M200	TF 200M315	TF 200M315

Connection

Minimum Cu cable cross-section (mm ²)	35	35	35	35	50	50	35	95
Maximum Cu cable cross-section (mm ²)	95	95	95	95	95	95	95	240
Maximum busbar width (mm)	20	20	20	20	20	20	20	32
Tightening torque min (Nm)	8.3/13	8.3/13	8.3/13	8.3/13	8.3/13	8.3/13	8.3/13	20/26

Mechanical characteristics

Durability (number of operating cycles)	10 000	10 000	10 000	10 000	10 000	10 000	10 000	10 000
Weight of 3 P switch (kg)	1.5	1.5	1.8	1.8	1.8	1.8	1.8	3.2
Weight of 4 P switch (kg)	2	2	2.3	2.3	2.3	2.3	2.3	4.5
Weight of 1 P extra (kg)	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.3
Frame pitch (mm)	36	36	36	36	50	50	36	60

(1) Category with index A = frequent operation - Category with index B = infrequent operation.

(2) With terminal shrouds or phase barrier.

(3) 4-pole device with 2 poles in series per polarity.

(4) The power value is given for information only, the current values vary from one manufacturer to another.

(5) For a rated operational voltage $U_n = 400$ VAC.

** Please ensure that fuse let through current does not exceed short-circuit capacity of the switch (kA peak).

FUSERBLOC

Fuse combination switches

for industrial fuses up to 1250 A

Characteristics according to IEC 60947-3 (continued)

250 to 1250 A

Thermal current I_{th} (40°C)	250 A	315 A	400 A	630 A	800 A	800 A	1250 A
NFC/DIN fuse size	B1-B2-B3/1	B1-B2-B3/-	B1-B2-B3-B4/2	C1-C2/3	C1-C2-C3/3	-/4	D1/4
Frame size for direct operation	5	6	6	17	17	18	18
Switch body size for front and side operation	15	16	16	17	17	18	18
Rated insulation voltage U_i (V)	750	800	1000(800*)	1000	1000	1000	1000
Rated impulse withstand voltage U_{imp} (kV)	8	8	12(8*)	12	12	12	12

Rated operational currents I_e (A)

Rated voltage	Utilisation category	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾	A/B ⁽¹⁾
400 VAC	AC-22 A / AC-22 B	250/250	315/315	400/400	630/630	800/800	800/800	1250/1250
400 VAC	AC-23 A / AC-23 B	250/250	315/315	400/400	630/630	800/800	800/800	1000/1250
690 VAC	AC-22 A / AC-22 B	250 ⁽²⁾ /250 ⁽²⁾	315 ⁽²⁾ /315 ⁽²⁾	400/400	500/630	800/800	800/800	800/1250
690 VAC	AC-23 A / AC-23 B	250 ⁽²⁾ /250 ⁽²⁾	250 ⁽²⁾ /315 ⁽²⁾	315/400	315/400	630/630	800/800	800/1250
220 VDC	DC-20 A / DC-20 B	250/250	250/250	400/400	630/630	800/800	800/800	1250/1250
220 VDC	DC-21 A / DC-21 B	200/200	200/200	315/315	630/630	800/800	800/800	1250/1250
440 VDC	DC-22 A / DC-22 B	250 ⁽³⁾ /250 ⁽³⁾	250 ⁽³⁾ /250 ⁽³⁾	315 ⁽³⁾ /315 ⁽³⁾	400 ⁽³⁾ /630 ⁽³⁾	800 ⁽³⁾ /800 ⁽³⁾	800/800	1250 ⁽³⁾ /1250 ⁽³⁾
440 VDC	DC-23 A / DC-23 B	200 ⁽³⁾ /200 ⁽³⁾	200 ⁽³⁾ /200 ⁽³⁾	250 ⁽³⁾ /315 ⁽³⁾	400 ⁽³⁾ /630 ⁽³⁾	800 ⁽³⁾ /800 ⁽³⁾	800/800 ⁽³⁾	1000 ⁽³⁾ /1000 ⁽³⁾

Operational power in AC-23 (kW)

At 400 VAC without pre-break in AC ⁽¹⁾⁽⁴⁾	132/132	160/160	220/220	355/355	450/450	450/450	560/560
At 690 VAC without pre-break in AC ⁽¹⁾⁽⁴⁾	220/220	220/295	220/295	295/400	400/400	400/400	400/475

Reactive power (kvar)

At 400 VAC ⁽⁴⁾	115	145	185	290	365	355	460
---------------------------	-----	-----	-----	-----	-----	-----	-----

Fuse protected short-circuit withstand (kA rms prospective)

Prospective short-circuit (kA rms) ⁽⁵⁾	80/100	80/-	80/50	80/100	80/100	-/100	-/100
Associated fuse rating (A) ⁽⁵⁾	250/250	315/-	400/400	630/630	800/800	-/800	-/1250

Short-circuit capacity

Rated peak withstand current (kA peak) ⁽⁵⁾	32.5	40	40	70	80	80	90
---	------	----	----	----	----	----	----

Fuse selection (maximum fuse size)**

SOCOMECS BS88	6B20 0250	6B30 0315	6B40 0400	6C20 0630	6C30 0800		
SOCOMECS BS88	6B2M 3015	6B3M 0400	6B4M 0500				
SOCOMECS DIN	6712 0250		6722 0400	6732 0400		6746 0800	6746 1200
SOCOMECS DIN	6713 0250		6723 0400	6733 0400		6747 0800	6747 1200
BUSSMANN	ED 250	ED 315	ED 400	FF 630	GF 800		
BUSSMANN	DD 200M315	ED 315M400	ED 400M500				
LAWSON	TKF 250	TKF 315	TMF 400	TTM 630	TLM 800		
LAWSON	TF 200M315	TKF 315M400	TMF 400M500				
GE	TKF 250	TKF 315	TMF 400	TTM 630	TLM 800		
GE	TF 200M315	TKF 315M355	TMF 400M450				

Connection

Minimum Cu cable cross-section (mm ²)	95	185	185	2 x 150	2 x 185		
Maximum Cu cable cross-section (mm ²)	240	240	240	2 x 300	2 x 300	4 x 185	4 x 185
Maximum busbar width (mm)	32	45	45	63	63	80	80
Tightening torque min (Nm)	20/26	20/26	20/26	40/45	40/45	40/45	40/45

Mechanical characteristics

Durability (number of operating cycles)	10 000	10 000	10 000	8 000	8 000	5 000	5 000
Weight of 3 P switch (kg)	3.2	4.8	4.8	16	17	25	25
Weight of 4 P switch (kg)	4.5	6.1	6.1	20	21.5	30	30
Weight of 1 P extra (kg)	1.3	1.3	1.3			3	3
Frame pitch (mm)	60	66	66	94	94	120	120

(1) Category with index A = frequent operation - Category with index B = infrequent operation.

(2) With terminal shrouds or terminal screen.

(3) 4-pole device with 2 pole in series by polarity.

(4) The power value is given for information only, the current values vary from one manufacturer to another.

(5) For a rated operational voltage $U_e = 400$ VAC.

* 400 A direct operation switch.


** Please ensure that fuse let through current does not exceed short-circuit capacity of the switch (kA peak).

Dimensions

External operation


NFC and DIN CD 25 to CD 32 A in size 10 x 38

External front operation

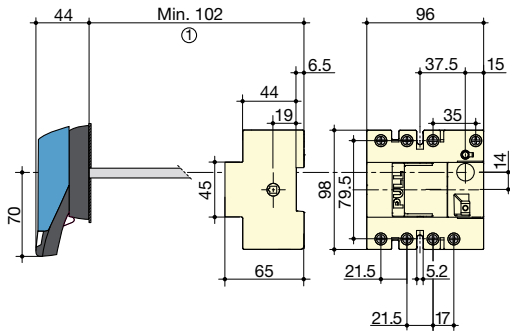


1. With 1 U-type AC: 130 mm.
 With 2 U-type AC: 155 mm.

External side operation

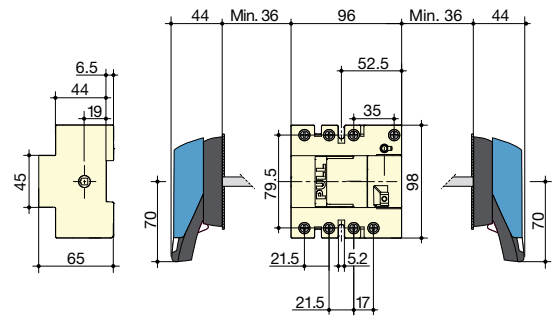


BS88 CD 20 to CD 32 A in size A1 - NFC and DIN 32 A in size 14 x 51

External front operation

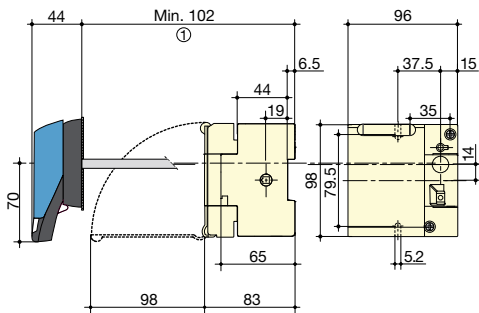


1. With 1 U-type AC: 130 mm.
 With 2 U-type AC: 155 mm.

External side operation

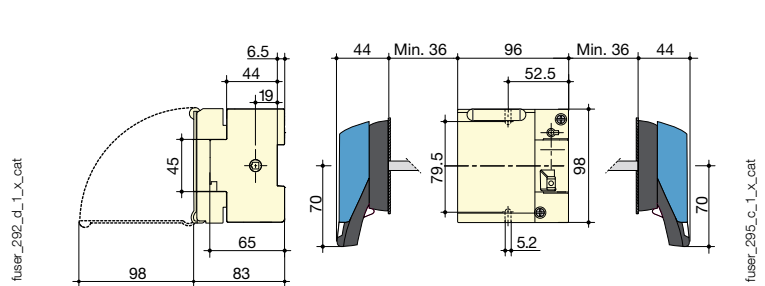

BS88 CD 20 to CD 32 A in size A1 - NFC and DIN 25 to 32 in size 10 x 38 and 14 x 51

External front operation fuse combination changeover

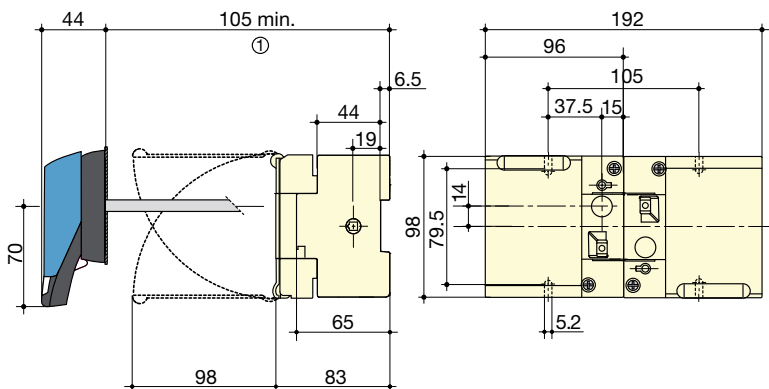

1. With 1 U-type AC: 130 mm
 With 2 U-type AC: 155 mm.

FUSERBLOC



Fuse combination switches

for industrial fuses up to 1250 A

Dimensions (continued)

External operation

BS88 32 to 250 A - NFC and DIN 50 to 250 A

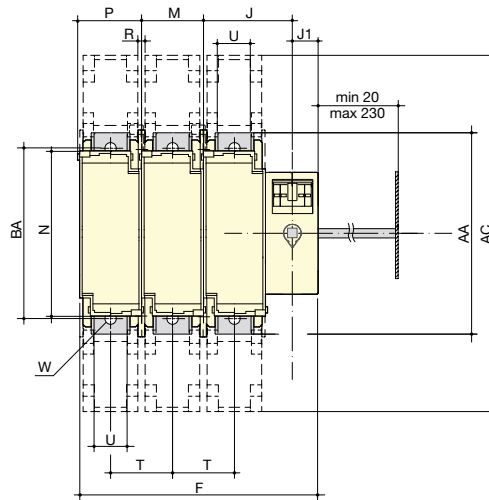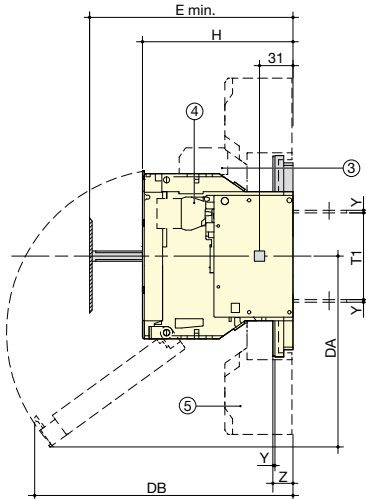


1. Position TEST.
2. Rear connection (option)
3. 1 or 2 CA type DDM
4. 1 or 8 CA NO/NC pre-break.
5. Terminal shrouds.

fuser_417_a_1_x_cat

Rating (A)	NFC/DIN Fuse size	BS88 Fuse size	Frame size	Overall dimensions E min.	Terminal shrouds AC	Switch body						Switch mounting						Connection							
						F 3p.	F 4p.	H	J	J1	BC	DA	DB	M	N	P	R	T	T1	U	W	Y	Z	AA	BA
32		A1	11	100	-	121	148	87	45	18	70	85	153	27	106	31	6	27	59	12	-	2	-	118	-
50	14 x 51	-	11	100	-	121	148	87	45	18	70	85	153	27	106	31	6	27	59	12	-	2	-	118	-
63	00C	A2-A3	12	125	-	136	168	116	50	18	70	159	145	32	106	36	5.4	32	59	12	-	2	-	118	-
100	22x58	A4	13	135	268	148	184	116	54	18	125	141	187	36	127	40	5.4	36	62	20	8.5	2.5	19.5	162	141
125	22x58	-	13	135	268	148	184	116	54	18	125	141	179	36	127	40	5.4	36	62	20	8.5	2.5	19.5	162	141
125	00	-	13	135	268	148	184	126	54	18	125	141	193	36	127	40	5.4	36	62	20	8.5	2.5	19.5	162	141
160	00	-	13	135	268	148	184	126	54	18	125	141	193	36	127	40	5.4	36	62	20	8.5	2.5	19.5	162	141
CD 160 CD 200	-	A3-A4	13A	145	268	148	184	139	54	18	125	141	-	36	130	40	5.4	36	78	18	8.5	3	20	162	141
160	0	A4-B1-B2	14	145	268	190	240	136	64	18	125	174	229	50	140	54	5.4	50	62	20	8.5	2.5	19.5	162	141
200	-	B1-B2	15	154	345	234	294	146	86	25	125	185	251	60	162	64	6.4	60	84	32	11	2.5	19.5	195	166
250	1	B1-B2-B3	15	154	345	234	294	146	86	25	125	185	251	60	162	64	6.4	60	84	32	11	2.5	19.5	195	166




BS88 315 to 400 A (size B1-B2-B3-B4) - DIN 400 A (size 2)

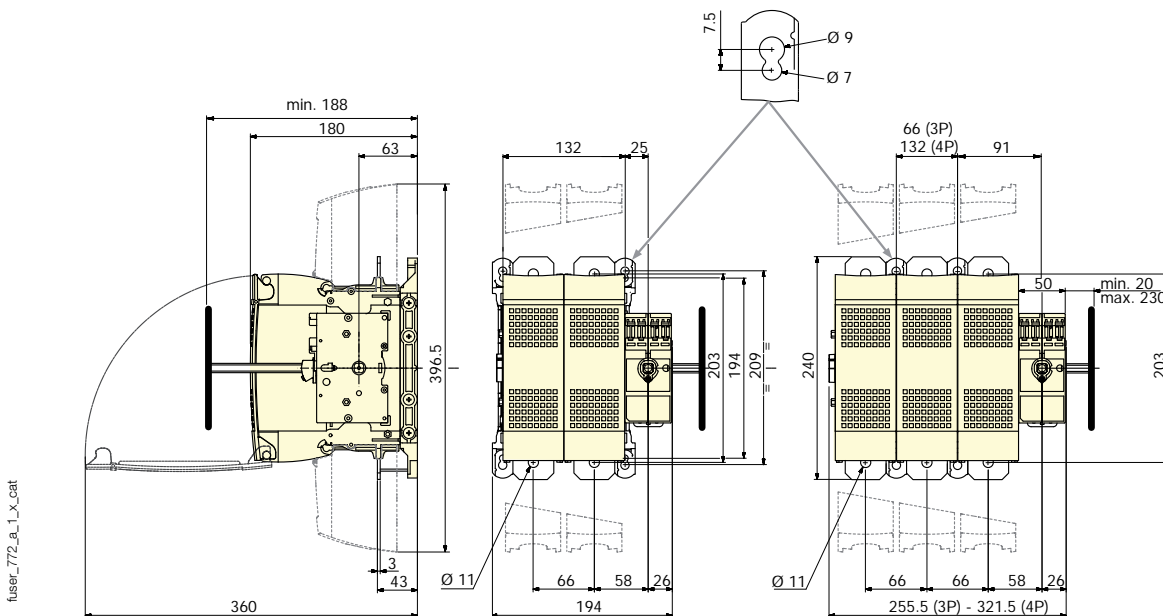

fuser_772_a_1_x_cat

BS88 - External front operation fuse combination changeover

32 to 400 A

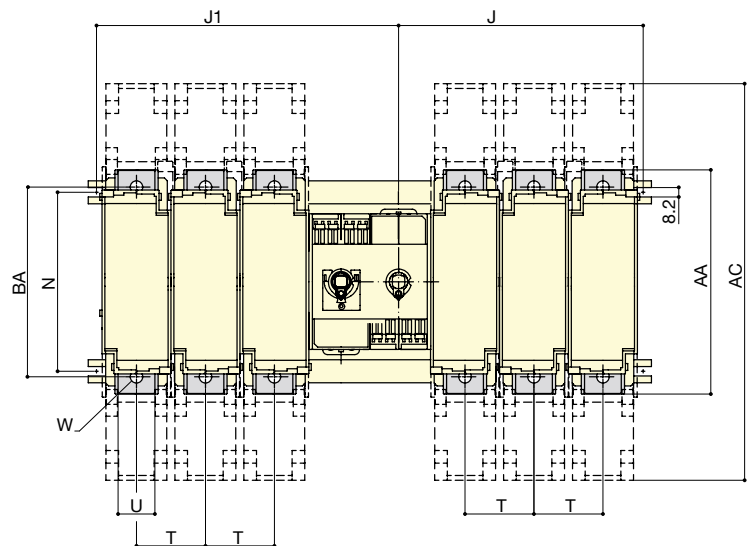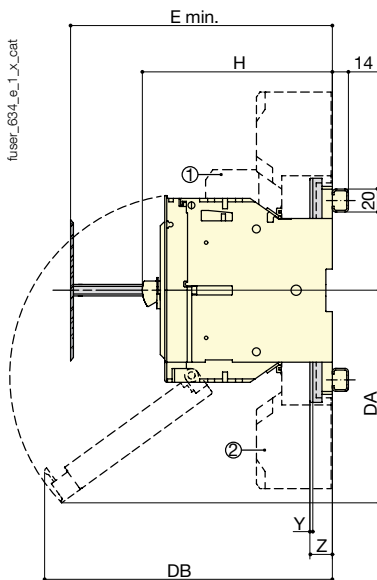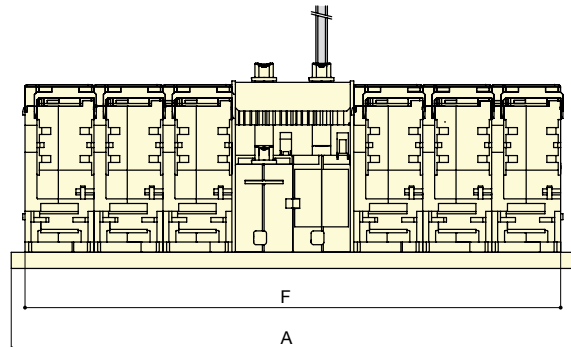

A. S1 handle: 32 and 63 A
B. S1 handle: 100 to 400 A
C. Door drilling

1. Fuse blown indication not available for BS88
2. Terminal shrouds

Rating (A)	Fuse size	Frame size	Dimensions				Terminal shrouds	Switch body								Switch mounting		Connection							
			A 3 P	A 4 P	E min	E max		F 3 P	F 4 P	H	J 3 P	J 4 P	J 1 3 P	J 1 4 P	DA	DB	N	T	U	W	Y	Z	AA	BA	
32	A1	11	264	318	100 ⁽¹⁾	146 ⁽¹⁾		242	296	87	102	129	138	165	85	153	90	27						118	
63	A2-A3	12	294	358	124	145		272	336	116.5	121	153	157	189	159	145	90	32						118	
100	A4	13	318	390	124	145	268	296	368	116 ⁽²⁾	133	169	169	205	141	179	128	36	20	8.5	2.5	19.5	162	141	
CD 160	A3-A4	13 A	318	390	145	225	268	296	368	139	133	169	169	205			128	36	18	8.5	3	20	162	141	
160	A4	14	402	502	124	225	268	380	480	136.5	176	226	212	262	174	229	128	50	20	8.5	2.5	19.5	162	141	
160	B1-B2	14	402	502	130	225	268	380	480	136.5	176	226	212	262	174	229	128	50	20	8.5	2.5	19.5	162	141	
CD 200	A3-A4	13 A	318	390	145	225	268	296	368	139	133	169	169	205			128	36	18	8.5	3	20	162	141	
200	B1-B2	15	490	610	130	225	345	468	588	146	213	273	263	323	185	251	155	60	32	11	2.5	19.5	195	166	
250	B1-B2-B3	15	490	610	154	225	345	468	588	146	213	273	263	323	185	251	155	60	32	11	2.5	19.5	195	166	
315	B1-B2-B3	16	526	658	154	225	355	504	636	149	231	297	281	347	200	260	168	66	50	11	3	20	205	175	
400	B1-B2-B3-B4	16	526	658	157	225	355	504	636	149	231	297	281	347	200	260	168	66	50	11	3	20	205	175	

(1) 1 AC: + 23.5 mm / 2 AC: + 47 mm.
(2) 132 mm with 2 AC.

FUSERBLOC




Fuse combination switches

for industrial fuses up to 1250 A

Dimensions (continued)

NFC and DIN - External front operation fuse combination changeover

50 to 400 A

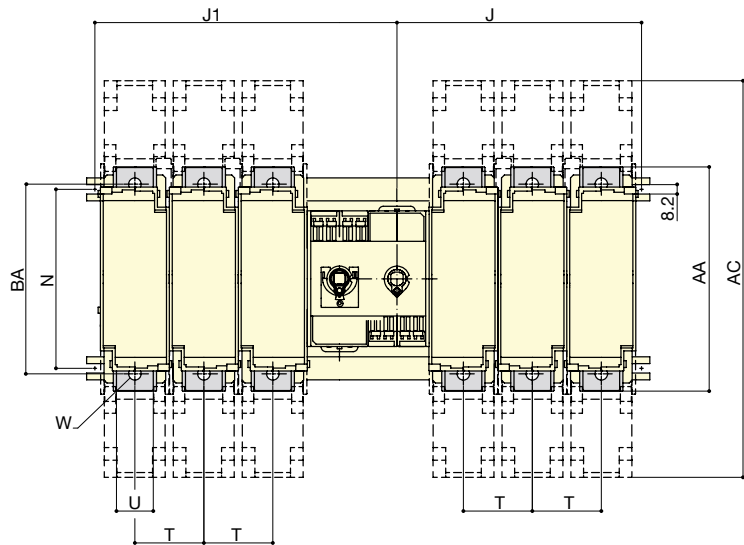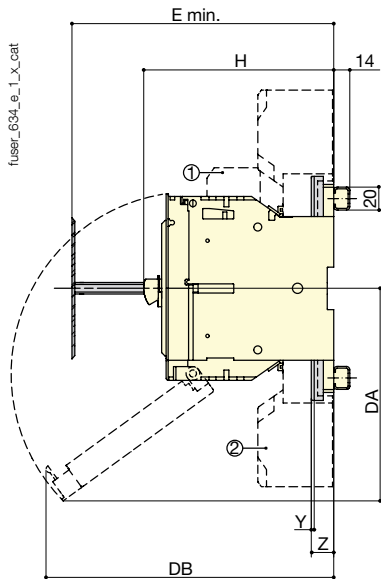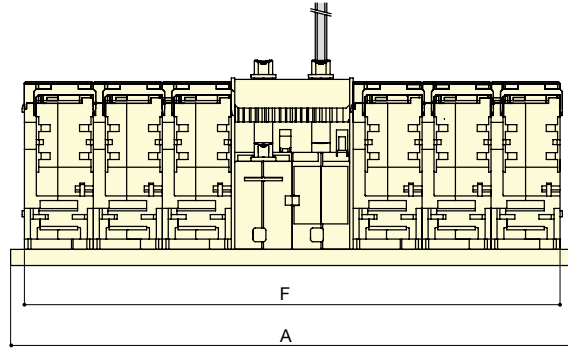

A. S1 handle: 50 and 63 A
 B. S2 handle: 100 to 400 A
 C. Door drilling


1. Fuse blown indication not available for BS88
 2. Terminal shrouds

Rating (A)	Fuse size	Frame size	Overall dimensions				Terminal shrouds		Switch body								Switch mounting		Connection					
			A 3p	A 4p	E min	E max	AC	F 3 P	F 4 P	H	J 3 P	J 4 P	J1 3 P	J1 4 P	DA	DB	N	T	U	W	Y	Z	AA	BA
50	14 x 51	11	264	318	100 ⁽¹⁾	146 ⁽¹⁾		121	148	87 ⁽¹⁾	102	129	138	165	85	153	90	27						118
63	00C	12	294	358	125	145		136	168	116.5 ⁽²⁾	121	153	158	189	159	145	90	32					118	
100	22 x 58	13	318	390	135	145	268	148	184	116 ⁽²⁾	133	169	169	205	141	187	128	36	20	8.5	2.5	19.5	162	141
125	22 x 58	13	318	390	135	145	268	148	184	116 ⁽²⁾	133	169	169	205	141	179	128	36	20	8.5	2.5	19.5	162	141
125	00	13	318	390	135	145	268	148	184	126.5	133	169	169	205	141	193	128	36	20	8.5	2.5	19.5	162	141
160	00	13	318	390	135	145	268	148	184	126.5	133	169	169	205	141	193	128	36	20	8.5	2.5	19.5	162	141
160	0	14	402	502	145	225	268	190	240	136.5	176	226	212	262	174	229	128	50	20	8.5	2.5	19.5	162	141
250	1	15	490	610	154	225	345	234	294	146	213	273	263	323	185	251	155	60	32	11	2.5	19.5	195	166
400	2	16	526	658	157	225	355	252	318	149	231	297	281	347	200	260	168	66	50	11	3	20	205	175


(1) 1 AC: +23.5 / 2 AC: +47
 (2) 132 with 2 AC

Direct operation

NFC CD 25 to CD 32 A in frame size 0 / fuse size 10 x 38

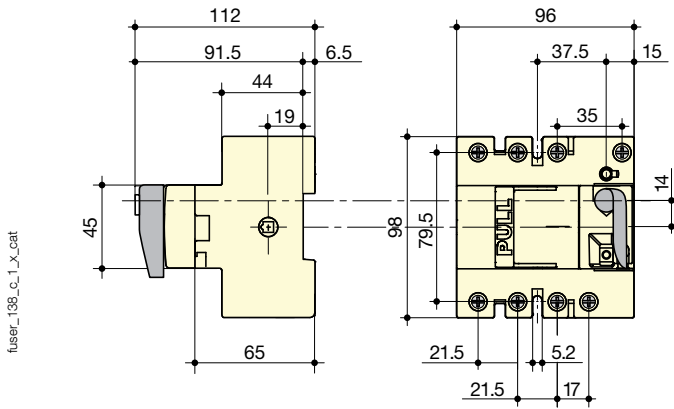

BS88 CD 20 to CD 32 A in frame size 0 / fuse size A1 - NFC CD 32 A in frame size 0 / fuse size 14 x 51

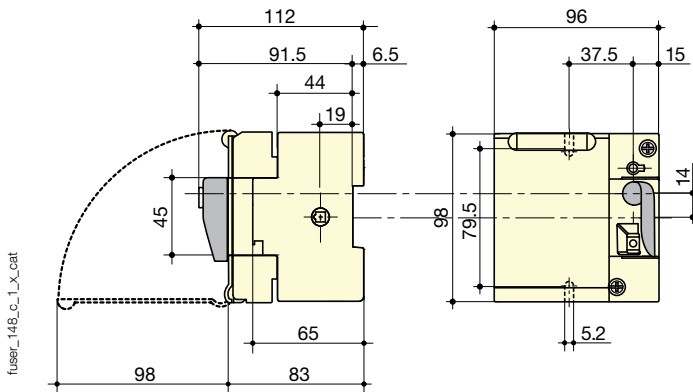

FUSERBLOC


Fuse combination switches

for industrial fuses up to 1250 A

Dimensions (continued)

Direct operation (continued)

BS88 32 to 400 A - NFC and DIN 50 to 400 A

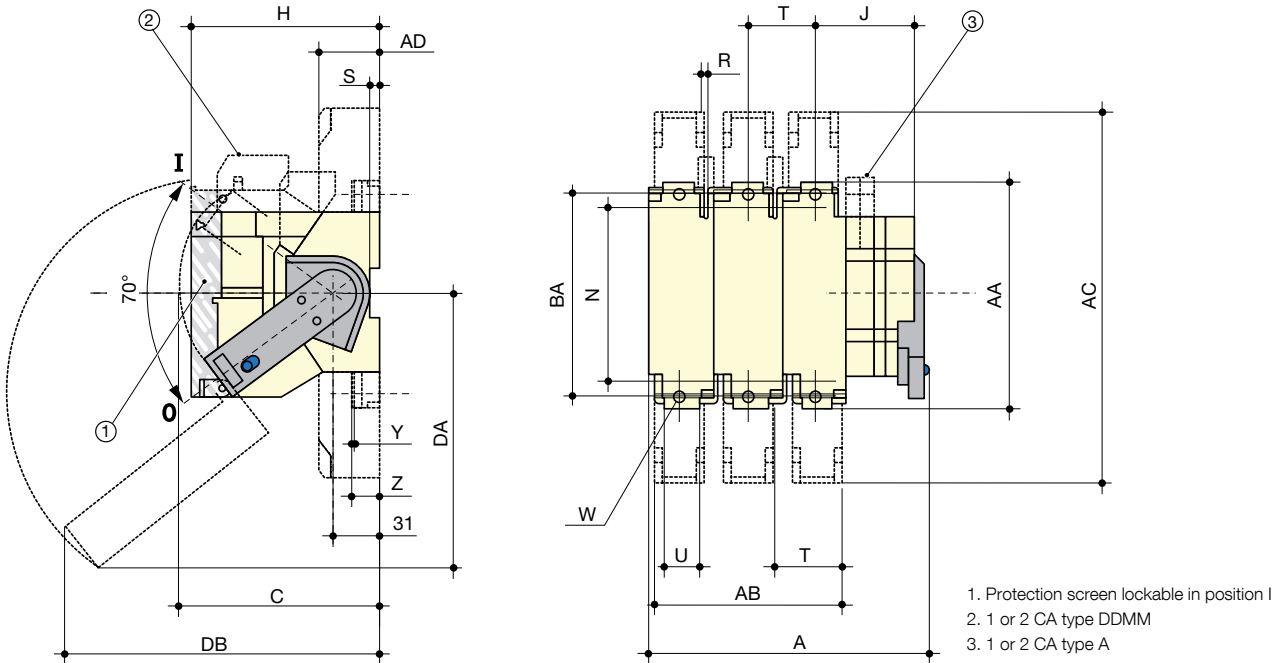


fuser_064_b_1_LX_cat

Rating (A)	NFC/DIN Fuse size	BS88 Fuse size	Frame size	Overall dimensions			Terminal shrouds				Switch body				Switch mounting			Connection							
				A 3p.	A 4p.	C	AB 3p.	AB 4p.	AC	AD	H	J	DA	DB	N	R	S	T	U	W	Y	Z	AA	BA	
32	-	A1	1	118	145	134	-	-	-	-	87	33.5	-	-	106	5.4	6.5	27	-	-	-	-	118	-	
50	14 x 51	-	1	118	145	134	-	-	-	-	87	33.5	-	-	106	5.4	6.5	27	-	-	-	-	118	-	
63	00C	A2-A3	2	133	165	134	-	-	-	-	116	36	159	145	106	5.4	6.5	32	-	-	-	-	118	-	
100	22 x 58	A4	3	150	186	173	108	144	268	44	116	38	-	-	127	5.4	-	36	20	8.5	2.5	19.5	162	141	
125	22 x 58	-	3	150	186	173	108	144	268	44	116	38	-	-	127	5.4	-	36	20	8.5	2.5	19.5	162	141	
125	00	-	3	150	186	173	108	144	268	44	126	38	141	193	127	5.4	-	36	20	8.5	2.5	19.5	162	141	
160	00	-	3	150	186	173	108	144	268	44	126	38	141	189	127	5.4	-	36	20	8.5	2.5	19.5	162	141	
CD 160	-	A3-A4	3A	152	188	173	108	144	268	44	139	38	-	-	130	5.4	-	36	20	8.5	3	19.5	162	141	
160	-	A4	4	150	186	173	108	144	268	44	116	38	-	-	127	5.4	4	50	20	8.5	2.5	19.5	162	141	
160	0	B1-B2	4	192	242	173	136	172	268	44	136	45	174	229	140	5.4	-	50	20	8.5	2.5	19.5	162	141	
CD 200	-	A3-A4	3A	152	188	173	108	144	268	44	139	38	-	-	30	5.4	-	36	20	8.5	3	19.5	162	141	
200	-	B1-B2	5	192	242	173	136	172	345	44	123	45	-	-	140	5.4	-	60	32	8.5	2.5	19.5	195	166	
250	1	B1-B2-B3	5	253	313	173	180	240	345	65	146	81	185	251	162	6.4	-	60	32	11	2.5	19.5	195	166	
315	-	B1-B2-B3	6	253	313	173	180	240	355	65	146	81	185	251	162	6.4	-	66	32	11	2.5	19.5	195	175	
400	2	B1-B2-B3-B4	6	271	337	173	192	258	355	65	149	86	200	260	172	6.4	-	66	50	11	3	20	205	175	

External and direct operation

BS88 630 to 800 A - DIN 630 to 1250 A

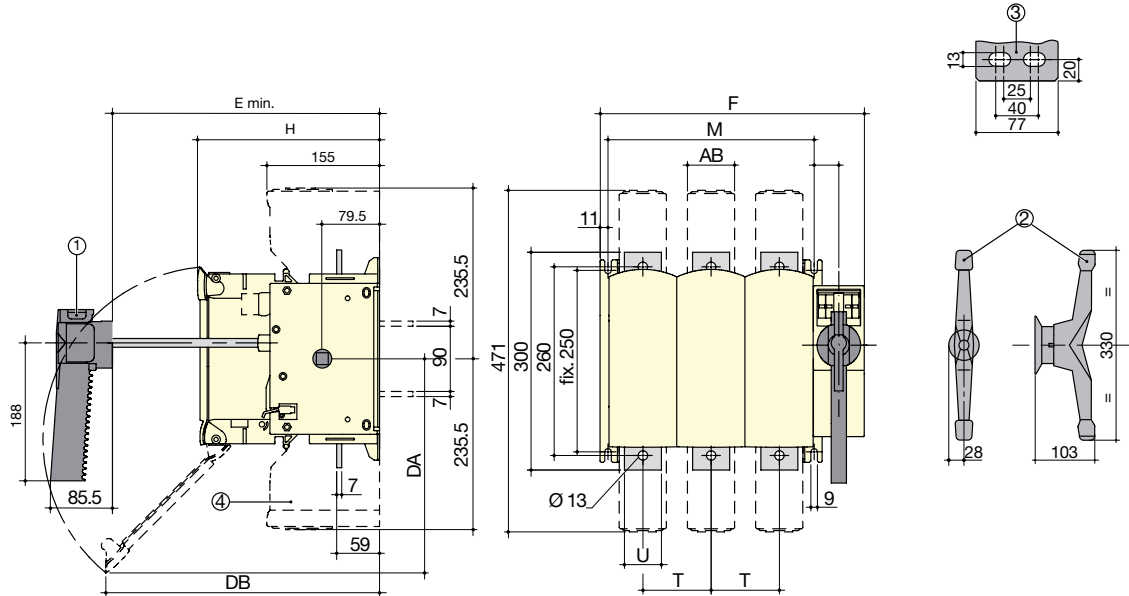

1. For handle frame size 17.
2. For handle frame size 18.
3. Connection terminals for frame size 18.
4. Terminal shrouds.

Rating (A)	DIN Fuse size	BS88 Fuse size	Frame size	Overall dimensions		Switch body					Switch mounting		Connection		Terminal shrouds
				E min	F 3p.	F 4p.	H	DA	DB	M 3p.	M 4p.	T	U	AB	
630	3	C1-C2	17	265	364	458	250	300	380	284	378	94	51	65	
800	3	C1-C2-C3	17	265	364	458	250	300	380	284	378	94	51	65	
800	4	-	18	304	442	562	289	355	295	362	482	120	77	88	
1250	4	D1	18	304	442	562	289	355	295	362	482	120	77	88	

fuser_415_g_1_x_cat






FUSERBLOC

Fuse combination switches

for industrial fuses up to 1250 A

Dimensions for external operation handles






BS88 - 32 to 63 A - NFC and DIN - 25 to 63 A

Handle type	Front operation		Side operation	
	Direction of operation	Door drilling	Direction of operation	Door drilling
S1 type Box size 0 				






fuser_712_a_1_gb_cat

fuser_713_a_1_gb_cat

BS88 / NFC and DIN - 100 to 400 A







Handle type	Front operation		Side operation	
	Direction of operation	Door drilling	Direction of operation	Door drilling
S2 type Box size 11-16 				

BS88 / NFC and DIN - 630 to 800 A

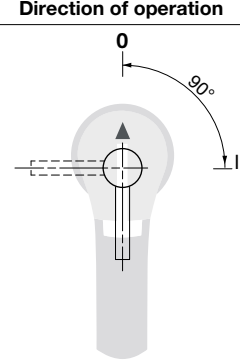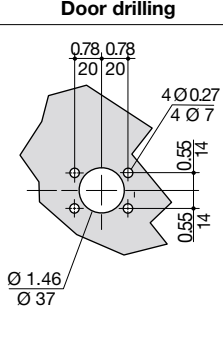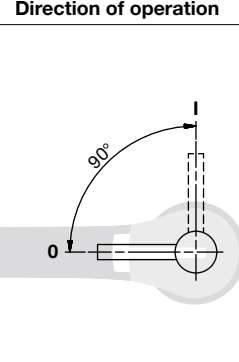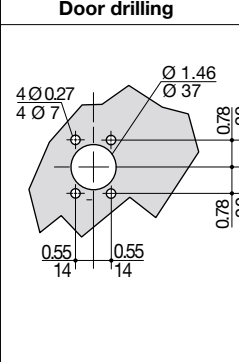Handle type	Front operation		Side operation	
	Direction of operation	Door drilling	Direction of operation	Door drilling
S3 type Box size 17 				

fuser_714_a_1_gb_cat

BS88 / NFC and DIN - 800 to 1250 A

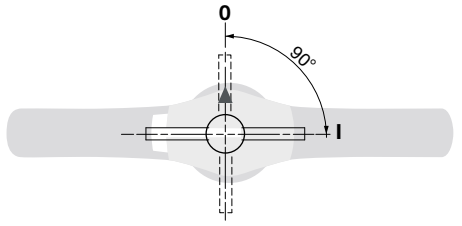Handle type	Front operation Direction of operation	Side operation Direction of operation	Door drilling
<p>S3 type Box size 18</p>  <p>Ø3.07 Ø78</p> <p>210 61</p>		 <p>90° 0</p>	 <p>4 Ø 7 Ø 37 14 14 20 20</p>
<p>S4 type</p>  <p>Ø78</p> <p>350 60</p> <p>fuser_715_a_1_gb_cat</p>	 <p>90° 0</p>		 <p>4 Ø 7 Ø 37 14 14 20 20</p>

SECTION 12.4

PRESSURE RELIEF DEVICE: ABB/COMEM 50M

(MANUFACTURER DETAILS - 8 PAGES)

Pressure Relief Device - M

M

They are widely used in large distribution transformers and traction transformers.

COMEM "M" pressure relief devices are used to control pressures inside tanks. They are used where accidental, instantaneous and uncontrolled increases in pressure may create the danger of explosion. They are designed to discharge the pressure increases that have taken place to the exterior in a very short time period (a few thousandths of a second).

They are widely used in the metal tanks of oil-cooled electric transformers. Sudden and violent short circuits inside these tanks, in fact, instantly generate an enormous amount of gas with a great increase in interior pressures. If the pressure cannot discharge to the exterior there is danger that the transformer may explode, with all the possible harm and damages this may cause. This danger can be prevented by installing one or more pressure relief device with discharge sizes proportional to the volume of oil contained in the transformer. It is always good practice to install these pressure relief devices in all situations where internal pressure values must not exceed specific safety limits.

Total pressure relief completely opening

Pressure relief device opening is total each time the pressure relief device operates for pressure settings between 20 and 90 kPa. The discharge opening area, for each pressure relief device operation, is equal to that for higher pressure settings even when pressure settings are lower than 20 kPa. If, however, pressures are generated inside the tank that are much higher than the setting then the spring, further compressed, allows the closing disk to create even larger discharge areas when it operates.

Operating performance

Nominal operating pressure: the pre-fixed overpressure value shall be agreed between supplier and purchaser within the standard range from 20 up to 90 kPa, with 10 kPa steps, with a tolerance of - 5 kPa to + 7 kPa. For model 50M the standard operating pressure range comes up to 200kPa, with 10kPa steps.



Construction

Our pressure relief devices are totally protected against external corrosion and against penetration of foreign bodies between cover and protective cap. This ensures perfect operating efficiency even for extended periods of time.

“M” pressure relief device

These consist of a flanged body and a corrosion-proof aluminium alloy disk. A brass rod that holds the spring is applied to the central part of the disk. There are two gaskets in the pressure relief device: a special shaped upper gasket and a lip seal.

When the pressure relief device is closed the upper gasket is pressed against the disk. The shape of the gasket permits a perfect seal even if the disk lifts 1-2 mm. The disk also makes a seal against the lip seal gasket as it moves upwards. If, due to interior pressure, the disk rises beyond this amount then the upper seal is no longer maintained while the lip seal remains.

At this instant the surface of the washer invested by internal pressure is multiplied in area as is the total force applied on the spring. This causes total and instantaneous opening of the pressure relief device which consequently discharges excess pressures to the exterior.

When pressure has been discharged the disk, pushed back by the spring, lowers down and closes the valve. As the disk moves downwards it first closes against the side gasket and then against the upper gasket.

This latter gasket, because of its special shape, is pressed down 1- 2 mm. and the disk moves further down, breaking the seal on the lip seal gasket. This releases any pressure that may have been trapped between the two gaskets. Now the pressure relief device is ready to work.

Routine tests

It is necessary to carry on operational tests, with compressed air:

- to check the correct functioning of the device at operating pressure values
- to check the functioning of the optic signal and of the electric contacts.

Installation guidelines

Our “M” pressure relief devices come in 2 sizes and have different discharge areas. This allows users to select the type that is best suited for the volume of oil contained in the tank. The following table gives guideline values:

Volume of oil tank:	Type of pressure relief device
up to 3000 dm ³	50 M*
up to 25000 dm ³	125 M*

* These guideline sizes are based on experience.

We recommend using multiple pressure relief devices when oil volumes exceed these levels. It is always good practice to use multiple pressure relief device with smaller discharge areas rather than a single pressure relief device with a large area. The reason for this, in the case of transformers, is that it is better to install one pressure relief device above each winding column since these are the points where maximum interior pressures are generated in case of a short circuit. Instantaneous pressure relief device opening implies direct contact between the closing disk and oil. For this reason the pressure relief device are equipped with a screw to bleed out air that may accumulate during oil tank filling procedures.

Oil tightness duct

It is a good practice to prevent harm to persons or property from violent jets of hot oil evacuating from the pressure relief device, for pressure relief device discharges to be ducted towards points properly designed to receive the hot oil. The protection of the environment is also another important target which has to be pursued by everybody. Our protection duct allows to drain the oil evacuated by the pressure relief device. The perfect hydraulic tightness of the system guarantees that not any drop of oil is dispersed in the environment, but collected through a pipe in a tank (pipe and tank are not supplied). The sealing oil duct is made of die-casted aluminium; a terminal flanged tube made of steel is also provided if someone wants to weld the pipeline. O-ring gaskets have been adopted for the duct sealing. Detailed assembling instructions are supplied with the equipment.

Pressure Relief Device - M



Visual signal that the pressure relief device is open

Pressure relief devices are equipped with a visual signal that shows when they have opened. This signal consists of a red knob that protrudes from the central part of the duct when the pressure relief device has opened. Just press it down in order to make it go back to its normal position and reset the switches, too.

Electrical signalling switch

Maximum 3 "pressure relief device open signal" contacts can be mounted on request. These are a fast tripping limit switch with switching contact contained inside a watertight room IP 65. The contacts simultaneously act with the visual signal.

Contact diagram

- FIRST SWITCH (terminals 12-14-11)
change-over contact:
 - 14-11 normally open
 - 11-12 normally closed
- SECOND SWITCH (terminals 22-24-21)
change-over contact:
 - 23-21 normally open
 - 21-22 normally closed
- THIRD SWITCH (terminals 32-34-31)
change-over contact:
 - 34-31 normally open
 - 31-32 normally closed

The switches have the following characteristics:

Specifications:


Breaking and making capacity (NO and NC contacts)		
Voltage	Uninterrupted current (making capacity)	Interrupted current (breaking capacity)
24 VDC to 220 VDC	2 A	100 mA L/R < 40 ms
230 VAC	2 A	2 A cos φ > 0.5

Other characteristics:

- The pressure relief device is supplied with a "locking system" which allows the pressure relief device to be blocked during the transformer oil leakage test. The locking system has been tested to withstand max 2 bar pressure and can also be used during the transformer transport.
- WARNING!:** the locking system must be removed before powering-up the transformer.
- The pressure relief device is supplied with a M25x1.5 cable gland.
- Colour: RAL 7001.

Outer surface protection

External surfaces are protected against weather corrosion. Aluminum alloy components are non-corroding and their surfaces are protected with a double layer of paint offering high level protection against all atmospheric agents and resisting temperature variations between -40 °C and +100 °C. Special painting for severe climate applications is also available on request.


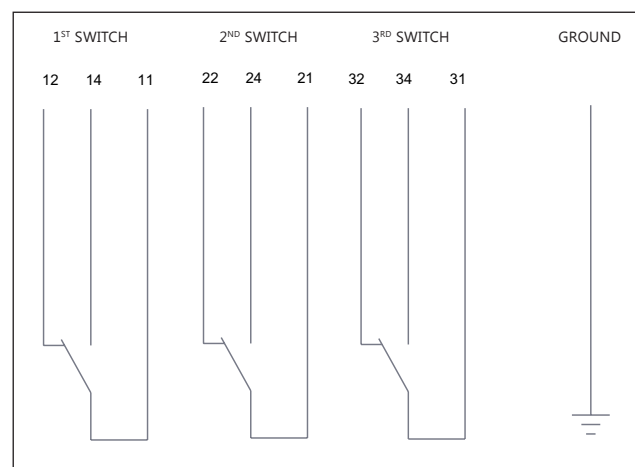





Pressure Relief Device - M

Overall dimensions

Type 50M

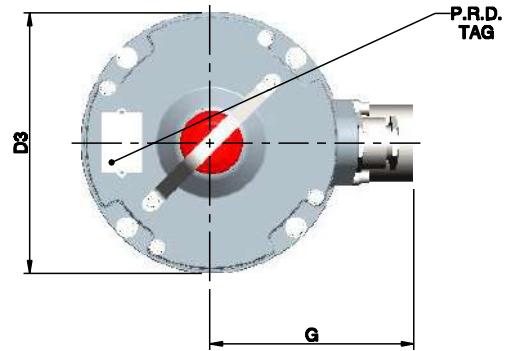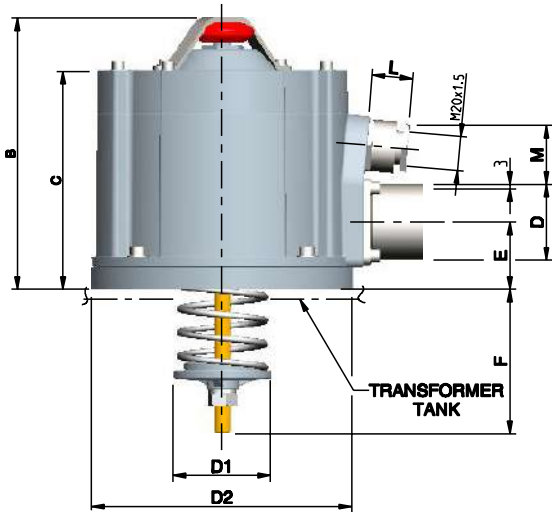

50M




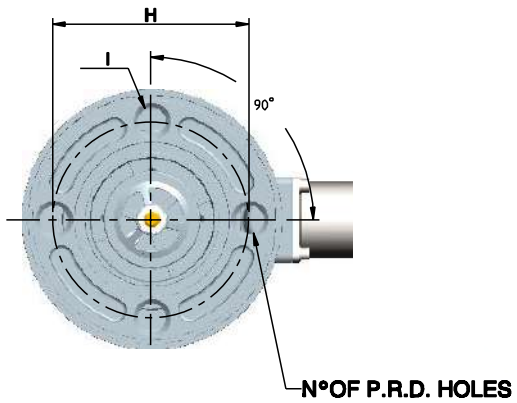


Type	B	C	D	D1	D2	D3	E	F20KPA *	F70KPA *	G	H	I	L	M	kg
50 M	170	139	Ø48.3	Ø62	Ø165	Ø166	41.5	95	60	130	Ø125	Ø18	23	38	2.1

* F = the dimension varies with set pressure

Overall dimensions


Type 125 M8 and 125 M6

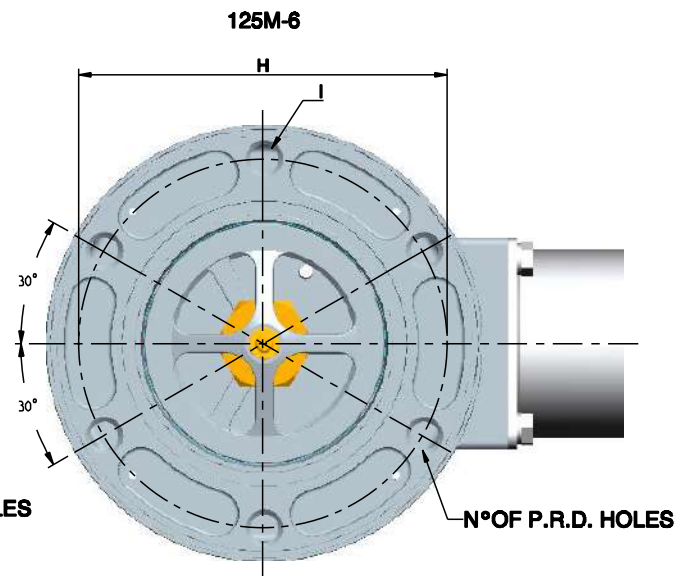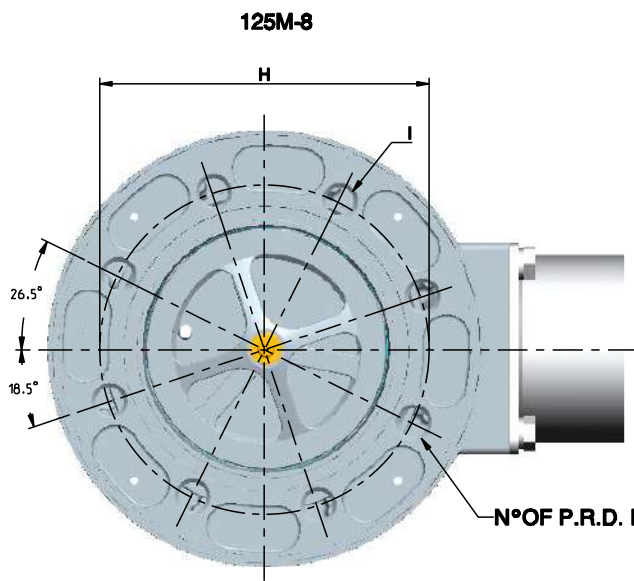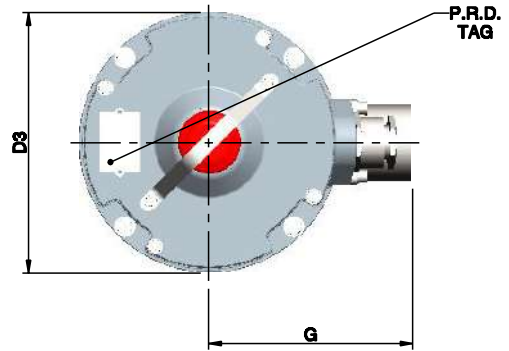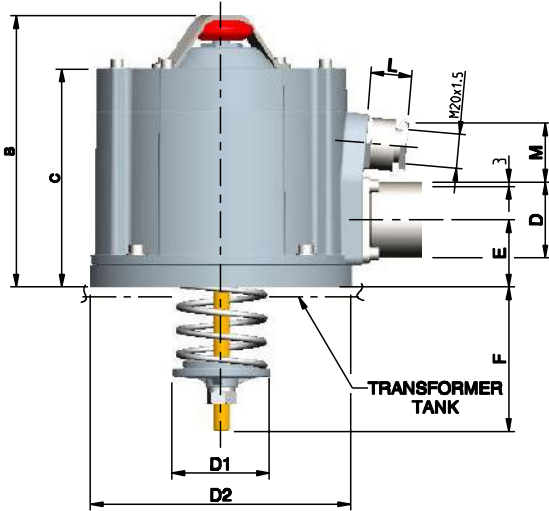

Type	B	C	D	D1	D2	D3	E	F20KPA	F70KPA	G	H	I	No. of holes
125 M-8	278	228	Ø120	Ø153	Ø278	Ø278	86	175	80	230	Ø210	Ø18	8
125 M-6	278	228	Ø120	Ø153	Ø278	Ø278	86	175	80	230	Ø235	Ø18	8

Pressure Relief Device - M

Assembling sequence

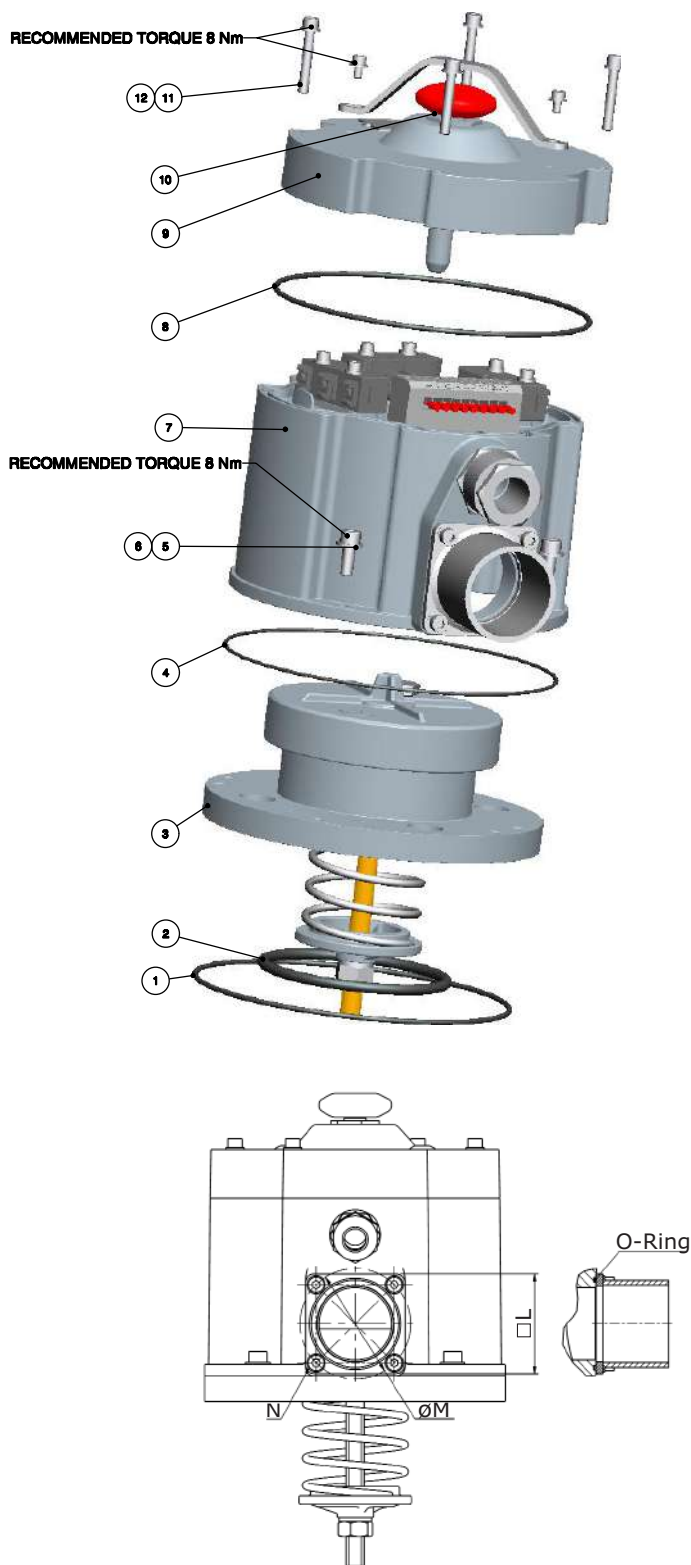

Type 50 M

Ref.	Q.ty	Code	Description
1	1	5G0D003600*	GASKET O.R. 3600
2	1	5G0D000183*	GASKET O.R. 6337
3	1	-	50M SAFETY VALVE
4	1	5G0D002637	GASKET O.R. 2637
5	1	5V51106012	UNI 5931 M6X12 FIXING SCREW
6	1	5400800861	WASHER
7	1	-	OIL DUCT 50M
8	1	5G0D003600	GASKET O.R. 3600
9	1	-	OIL DUCT COVER 50M
10	1	-	VISUAL SIGNAL
11	1	5V50605035	UNI 5931 M5X35 FIXING SCREW
12	1	5RG0600050	WASHER

Type 125 M-8

Ref.	Q.ty	Code	Description
1	1	5G0D041050**	GASKET O.R. 41050
2	1	5G0L000227**	GASKET O.R. 8650
3	1	-	125M-8 SAFETY VALVE
4	1	5G0D041050**	GASKET O.R. 41050
5	1	5V50606060	UNI 5931 M6X60 FIXING SCREW
6	1	5400800861	WASHER
7	1	-	OIL DUCT 125M
8	1	5G0D041100	GASKET O.R. 41100
9	1	-	OIL DUCT COVER 125M
10	1	-	VISUAL SIGNAL
11	1	5V50605035	UNI 5931 M5X35 FIXING SCREW
12	1	5RG0600050	WASHER

Type 125 M-6

Ref.	Q.ty	Code	Description
1	1	5G0D041050**	GASKET O.R. 41050
2	1	5G0L000227**	GASKET O.R. 8650
3	1	-	125M-6 SAFETY VALVE
4	1	5G0D041050**	GASKET O.R. 41050
5	1	5V50606060	UNI 5931 M6X60 FIXING SCREW
6	1	5400800861	WASHER
7	1	-	OIL DUCT 125M
8	1	5G0D041100	GASKET O.R. 41100
9	1	-	OIL DUCT COVER 125M
10	1	-	VISUAL SIGNAL
11	1	5V50605035	UNI 5931 M5X35 FIXING SCREW
12	1	5RG0600050	WASHER

* ALTERNATIVE PLANE GASKET CODE 5C0V412501

** ALTERNATIVE PLANE GASKET CODE 5C0V452900

Type	□L	ØM	N	O-Ring
50 M	55	61	4 Screws M5x12	5G0D002187
125 M-8	135	152	4 Screws M12x25	5G0D004475
125 M-6	135	152	4 Screws M12x25	5G0D004475

Order sheet

Number of pieces			
Model	50 M <input type="checkbox"/>	125 M-8 <input type="checkbox"/>	125 M-6 <input type="checkbox"/>
Contacts	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3
Pressure setting 20±90 kPa Up to 200kPA for 50M only	Value kPa		
For use in:	Moderate salinity areas acc. to ISO 12944		<input type="checkbox"/>
	Off-shore areas acc. to ISO 12944		<input type="checkbox"/>
Gaskets type	Viton <input type="checkbox"/>	silicone oils and/or high temperature -10°C up to + 150°C	
	NBR -40°C <input type="checkbox"/>	mineral oils and low temperature -40°C up to + 120°C	


DEHYDRATING BREATHER: BROWNELL TYPE R1

(MANUFACTURING DATA - 5 PAGES)
(FITTING INSTRUCTIONS - 2 PAGES)
(SAFETY DATA SHEETS - 11 PAGES)

SECTION
12.5



Transformer Breathers

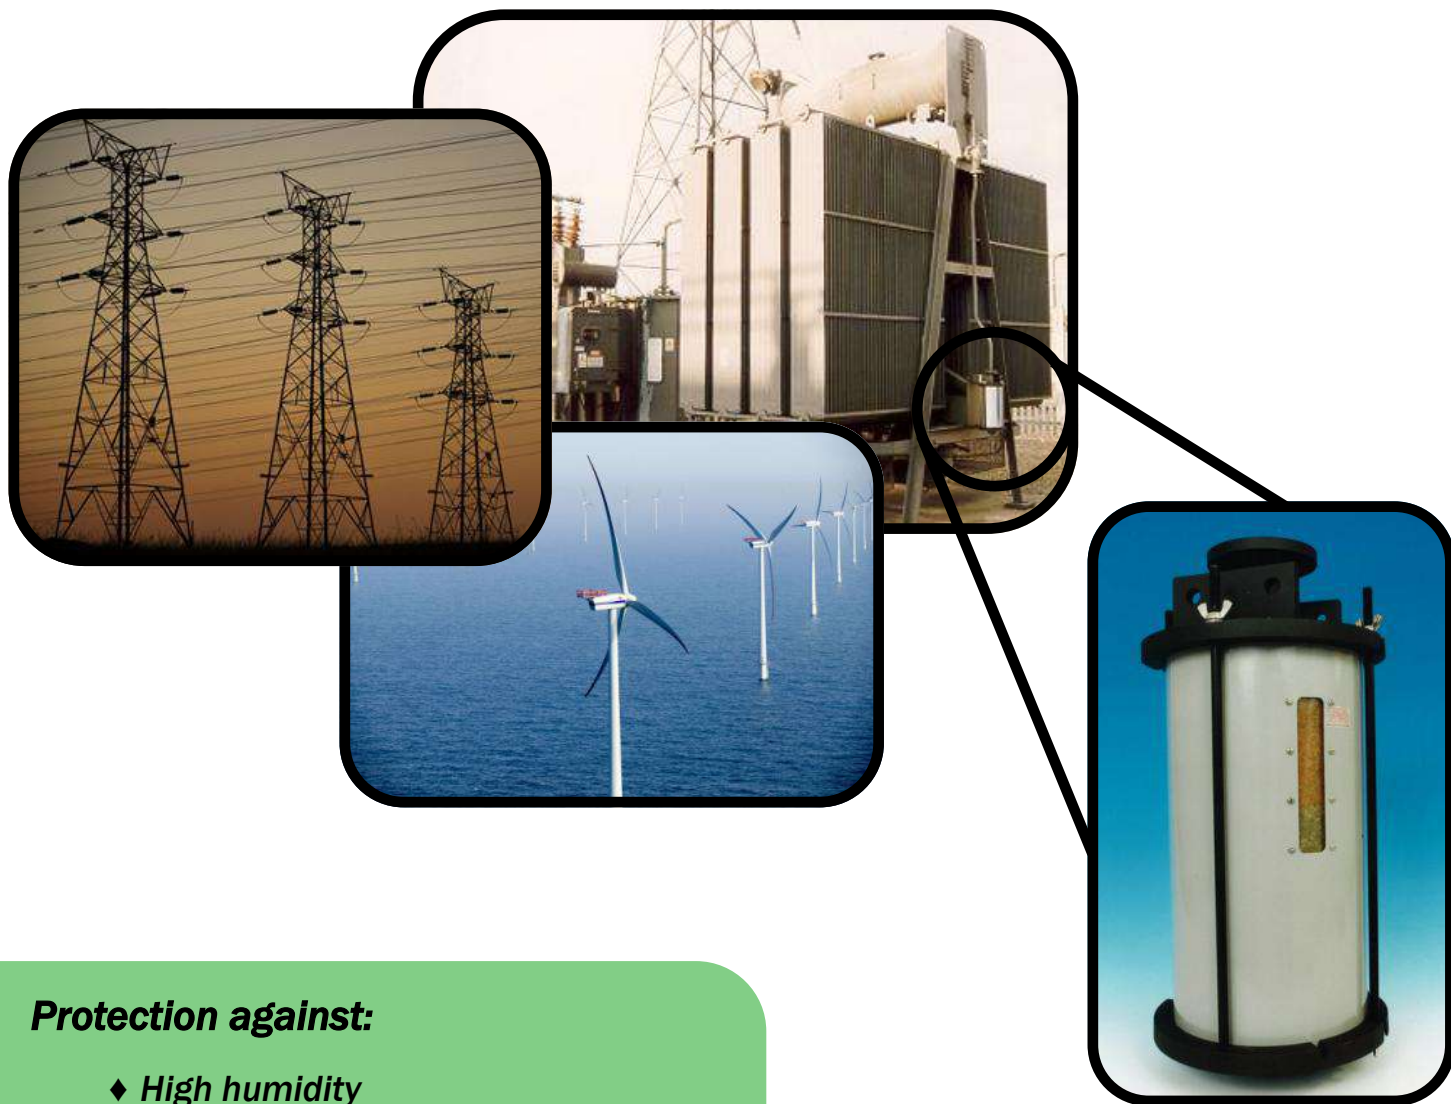

Protection against:

- ◆ *High humidity*
- ◆ *Water condensation*
- ◆ *Pressure variations*
- ◆ *Dielectric loss*
- ◆ *Mould growth*
- ◆ *Outgassing*


Key Technical Features

- High performance plastic or metal construction
- Simple installation
- ISO9001/2008 design approved
- Suitable for 1250 kVA to 750 mVA Transformers
- Low dusting beaded ENVIROGEL adsorbent
- Up to 25% adsorption capacity
- Definitive colour change saturation indication
- IP 65 rating
- Operating temperature range -50°C to $+70^{\circ}\text{C}$
- Vandal proof
- Weather resistant
- All round visual saturation indicator




Size R Transformer Breather

Typical Electrical Breakdown in Transformers

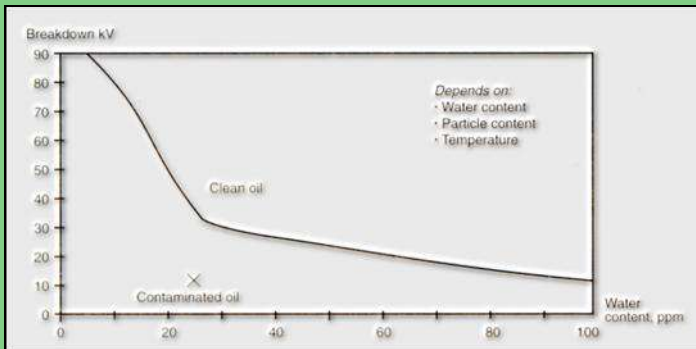

The insulation value of oil can deteriorate dramatically as it becomes contaminated with water.

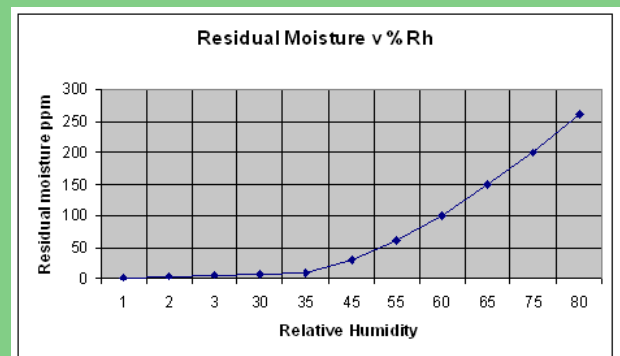

Water content of oil increases as it is exposed to high relative humidity

Rechargeable Transformer Breathers



V, W Transformer Breathers

BROWNELL Transformer Breathers provide clear visibility of the ENVIROGEL through a shatter-proof, UV stabilised polycarbonate cylinder or window.

Two-way, low pressure valves are fitted in the base of the breather, to ensure that atmospheric air enters the desiccant charge when a negative pressure differential occurs within the transformer being protected.


BROWNELL Transformer Breathers are filled with ENVIROGEL, self-indicating desiccant.

The ENVIROGEL is orange in colour when active, turning green when saturated. This allows a visible assessment of the condition of the ENVIROGEL. Various sizes and packs of ENVIROGEL are available for refilling the Transformer Breathers.

BROWNELL have more than 40 years experience in the design, manufacture and testing of types of humidity control equipment and moisture measuring instruments. Please contact our Technical Services Division for further information.



Robust construction Transformer Breathers


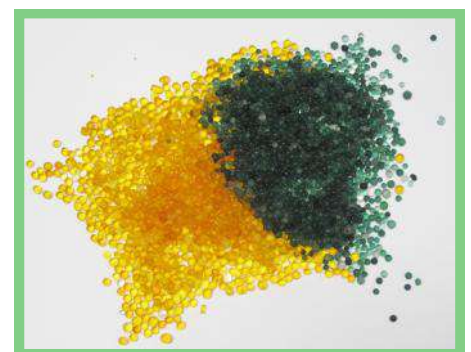


The ENVIROGEL: orange in colour when active, turning green when saturated

Sizes R, R1, R2, S, T & U

The top pipe connector (3/4" Female Pipe Thread) is also the filling and emptying point. The beaded, self-indicating ENVIROGEL should be replaced once the colour has changed from orange to green, as indicated on the label attached to the breather. All threads conform to BS21 and ISO7-1. Full installation and maintenance instructions are supplied with each BROWNELL Transformer Breather.

Size	Max. Oil Contents	Weight of Desiccant	Overall Length (A)	Overall Diameter (B)
R	1500 Litres	0.60 Kg	158mm	108mm
R1	3000 Litres	1.20 Kg	260mm	108mm
R2	4750 Litres	1.90 Kg	362mm	108mm
S	1130 Litres	0.45 Kg	170mm	127mm
T	2250 Litres	0.90 Kg	270mm	127mm
U	4500 Litres	1.80 Kg	470mm	127mm

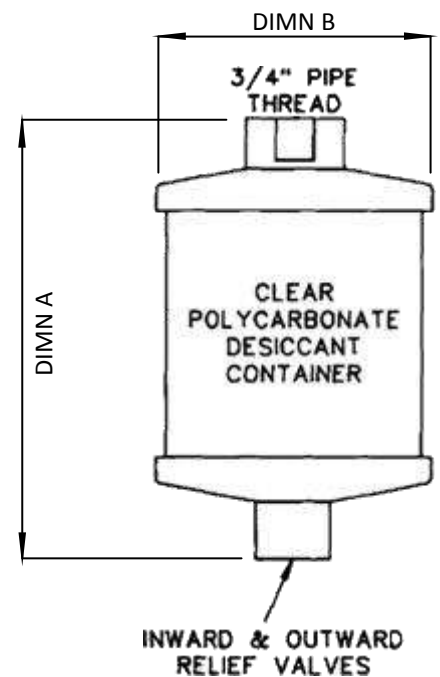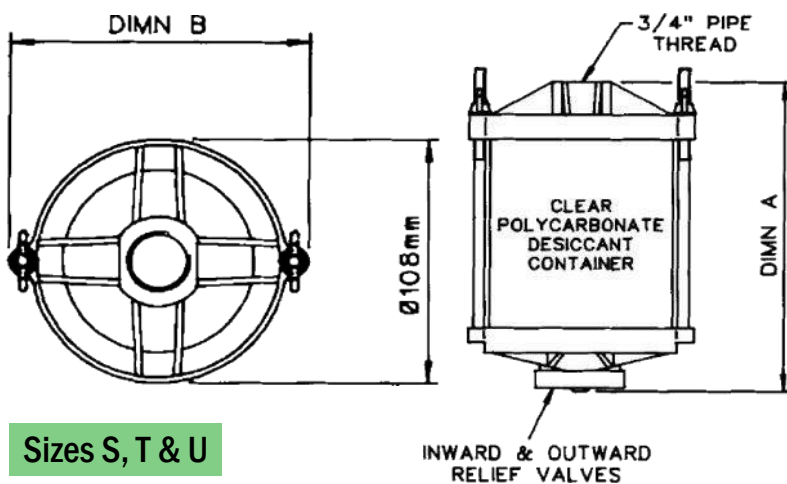

Quick Change

- ◆ ENVIROGEL cartridges can be refilled, replaced or reactivated
- ◆ Rapid cartridge replacement
- ◆ No special tools required
- ◆ Minimum downtime and maintenance
- ◆ Ideal for planned maintenance cycles



Transformer Breathers can be changed in a matter of minutes with Brownell's replacement cartridges. (Size W illustrated)

FAQs

Q: Can I fit a Transformer Breather, which has a larger ENVIROGEL capacity than my existing Transformer Breather?

A: Yes, for example you can use a Size R1 Transformer Breather to replace an R type which will significantly increase the time between ENVIROGEL maintenance.

Q: Are there any specific safety considerations when handling Transformer Breathers and ENVIROGEL?

A: We recommend when handling ENVIROGEL, suitable precautions are taken (as with any potentiality dust generating material) an approved respiratory mask is used.

Q: What is the recommended method for disposing of used ENVIROGEL?

A: We suggest that used ENVIROGEL is disposed of at a registered landfill site in accordance with local authority regulations.

Q: How can I reactive saturated ENVIROGEL?

A: Following the safety procedures for handling ENVIROGEL. Heating the ENVIROGEL for 3-4 hours at 95°C will recover 95% of the adsorption capacity.



INSTALLATION, OPERATING & MAINTENANCE INSTRUCTIONS

FOR BLD9662/01-3 TRANSFORMER BREATHERS

Description

The S, T & U Transformer Breathers consist of a top moulding with metal adaptor, a refillable desiccant container with stainless steel guard and a bottom moulded assembly which houses the inlet and outlet relief valve. All items are clamped together by two-threaded tie rods.



Installation

The Breather is supplied with a threaded sealing plug, which is fitted into the atmosphere air inlet on the top moulding. This is to prevent any water vapour ingress whilst in store. This plug should be removed immediately prior to the top moulding (with adaptor) being screwed to the air vent pipe of the equipment. The thread size of the metal adaptor on the top moulding of the breather is $\frac{3}{4}$ inch BSPP Female. When fitting the breather to the transformers pipe it should only be fitted by the metal adaptor, the transformer breather must not be twisted from the body or the supporting tie rods as this will damage the end mouldings.



The breather is now ready to use.

Since the change from oil seal bowls to relief valves no other work is involved in the installation as the valves prevent any water vapour ingress from the atmosphere.

Operation

Periodic inspection should be carried out to monitor the condition of the desiccant charge. The breathers are charged with ENVIROGEL desiccant. This material changes in colour from orange to green as it becomes saturated with water vapour. When the colour change reaches the indicator line on the label on the desiccant container, it should be re-charged with fresh ENVIROGEL.

Desiccant

All Brownell transformer breathers are filled with non carcinogenic silica gel called ENVIROGEL. For more information about ENVIROGEL go to www.envirogel.co.uk

Maintenance

The only maintenance necessary to keep the breather in a fully active condition is the replacement of the spent desiccant as follows:

1. Loosen the wing nuts on the tie rods until the desiccant container and guard can be removed from between the top and bottom mouldings.
2. Remove the top perforated cover and empty the spent desiccant from the container. This material may be disposed of in a normal landfill site.

3. Fill the container with active Envirogel desiccant (Refills of the correct grade and quantity are available from Brownell Limited). Lightly tap the container to settle the desiccant and top up if necessary.
4. Replace the perforated cover and refit the container between the top and bottom mouldings and guard ensuring that it is correctly fitted between the sealing gaskets.
5. Screw the wing nuts home, being careful not to over tighten as this can distort the moulding.

NOTE: If it is necessary to replace the complete desiccant container, instead of re-charging the existing unit, ensure that the self-adhesive aluminum foil vapour barriers are removed from the top and bottom of the container before installation.

DESICCANT REFILLS

	Size S	Size T	Size U
Refill Part No.	BL/D6750/01	BL/D6750/02	BL/D6750/03
Complete Desiccant Container Part No.	BL/D6437/01	BL/D6437/02	BL/D6437/03

As indicated above, individual refills containing sufficient Envirogel desiccant of the correct grade and volume are available. This method of supply is recommended to users who have a limited requirement.

As an alternative to individual refills for users who have a regular requirement, 25, 50 & 125kg sealed drums of the correct grade and size of desiccant are available.

It must be emphasised, however, that careful housekeeping is necessary when dispensing desiccant from bulk containers.

Ensure that the container is open for the minimum time necessary to remove the required quantity and that is properly sealed immediately after use.

Please contact our technical Support Division on 020 838 8408 or 020 8965 9281 for further information and guidance if required.

BROWNELL
L I M I T E D

Unit 2, Abbey Rd Industrial Park
Commercial Way, Park Royal
London, NW10 7XF

Tel: **020 8965 9281** Fax: **020 8965 3239**

E-Mail: info@brownell.co.uk
Website: www.envirogel.co.uk
Website: www.tankventdryer.com



Safety Data Sheet

According to Regulation (EC) No 1907/2006 (REACH)

BROWNELL
L I M I T E D

Trade Name: Brownell Limited

Product: Self-Indicating Silica Gel, Orange to Green

Version No: MCS/101/01/MSDS - 06 / EN

Revision Date: 03.01.2017

Print Date: 03.01.2017

SECTION 1: Identification of the substance/mixture and of the company/undertaking

1.1 Product identifier

Trade name or designation of the mixture	Self-Indicating Silica Gel, Orange to Green
Registered number	Not available
Synonyms Issue	Silica, amorphous, silica, precipitated and gel
Date Version	12 th May 2014
Number Revision	06
Date Supersedes	03 rd January 2017

1.2 Relevant identified uses of the substance or mixture and uses advised against

Identified uses	Desiccant. For adsorption of moisture and prevention of corrosion and mould growth
Uses advised against	No other uses are advised

1.3 Details of the supplier of the safety data sheet

Supplier Name	Brownell Limited
Address	Unit 2, Abbey Road Industrial Park, Commercial Way Park Royal London NW10 7XF
Country	UK
Telephone	+44 (0) 208 965 9281
Fax	+44 (0) 208 965 3239
Email	info@brownell.co.uk
Contact	Robert Beasley
Website	www.brownell.co.uk

1.4 Emergency telephone number +44 (0) 20 8838 8408 – (08:00 – 17:00) office hours

SECTION 2: Hazards identification

2.1 Classification of the substance or mixture

The mixture has been assessed and/or tested for its physical, health and environmental hazards and the following classification applies.

Classification according to Regulation (EC) No. 1272/2008 as amended

This substance does not meet the criteria for classification according to the Regulation (EC) 1272/2008 as amended.

Physical hazard	Not classified as a physical hazard.
Human health hazard	Not classified as a health hazard.
Environmental hazard	Not classified as an environmental hazard.

Safety Data Sheet

According to Regulation (EC) No 1907/2006 (REACH)

BROWNELL
L I M I T E D

Trade Name: Brownell Limited

Product: Self-Indicating Silica Gel, Orange to Green

Version No: MCS/101/01/MSDS - 06 / EN

Revision Date: 03.01.2017

Print Date: 03.01.2017

Addition information

Repeated exposure may cause skin dryness or cracking.
Exposure to powder or dusts may be irritating to eyes, nose and throat.

2.2 Label elements

Labelling according to Regulation (EC) No 1272/2008 [CLP/GHS]

Product identifier	Not applicable
Hazard statements	Not applicable
Precautionary statements	Not applicable
Supplemental hazard information	Not applicable
Special rules for supplemental label elements for certain mixtures	Not applicable
Additional labeling	Not applicable

2.3 Other hazards

Not applicable

SECTION 3: Composition/information on ingredients

3.1 Substances

Substance name	Silica Gel (Silicon Dioxide) >98%	Methyl Violet <0.2%	Water <2%
Index No	-	-	-
EC No	231-545-4	208-953-6	231-791-2
REACH No	JT211170-39	-	-
CAS No	(12926-00-8) 7631-86-9	548-62-9	7732-18-5

Purity	Not Applicable
Synonyms	Silica, amorphous; silica, precipitated and gel.
Stabilisers	Not Applicable
Hazard Impurities	Not Applicable

3.2 Mixtures

Additional information

Not applicable
This mixture does not contain further substances fulfilling the criteria of hazard class "acute toxicity" according to CLP regulation.

SECTION 4: First Aid measures

General information

If exposed or concerned, get medical advice/attention. Show this safety data sheet to the doctor in attendance.

4.1 Description of first aid measures

Inhalation

If dust from the material is inhaled, remove the affected person immediately from the source of exposure to fresh air, seek medical attention if symptoms develop or persist.

Safety Data Sheet

According to Regulation (EC) No 1907/2006 (REACH)

BROWNELL
L I M I T E D

Trade Name: Brownell Limited

Product: Self-Indicating Silica Gel, Orange to Green

Version No: MCS/101/01/MSDS - 06 / EN

Revision Date: 03.01.2017

Print Date: 03.01.2017

Skin contact	Wash spillage from skin with soap and water, seek medication attention if irritation develops and persists.
Eye Contact	Do not rub eyes. Rinse with water, seek medical attention if irritation develops and persists.
Ingestion	Rinse out mouth with water thoroughly; seek medical attention if symptoms occur. If ingestion of a large amount does occur, seek medical attention.

4.2 Most important symptoms and effects, both acute and delayed

Symptoms Dust may irritate the respiratory tract, skin and eyes.

4.3 Indication of any immediate medical attention and special treatment needed

Notes for the doctor Provide general supportive measures and treat symptomatically. Keep victim under observation.
Symptoms may be delayed.

SECTION 5: Firefighting measures

5.1 Extinguishing media

Suitable extinguishing media Any media suitable for the surrounding fire.
Unsuitable extinguishing media Not applicable and unused material will not burn.

5.2 Special hazards arising from the substance or mixture

Hazardous combustion products Inorganic compound, not combustible and is not considered to be a fire hazard.

5.3 Advice for firefighters

Additional information Special protective equipment for fire-fighters - Full protective clothing must be worn in case of fire and appropriate breathing equipment for surrounding fire.

SECTION 6: Accidental release measure

6.1 Personal precautions, protective equipment and emergency procedures.

For non-emergency personnel

Protective equipment Avoid inhalation of dust from the spilled material. Wear a dust mask if dust is generated above exposure limits. Wear appropriate protective equipment and clothing during clean-up. Ensure adequate ventilation.

Emergency procedures Keep unnecessary personnel away.

6.2 Environmental precautions No special precautions.

Safety Data Sheet

According to Regulation (EC) No 1907/2006 (REACH)

BROWNELL
L I M I T E D

Trade Name: Brownell Limited

Product: Self-Indicating Silica Gel, Orange to Green

Version No: MCS/101/01/MSDS - 06 / EN

Revision Date: 03.01.2017

Print Date: 03.01.2017

6.3 Methods and materials for containment and cleaning up

For containment Contain spillage, collect material using a vacuum cleaner equipped with HEPA filter and collect in suitable container for disposal.

For cleaning up Large Spills: Wet down with water and pile for later disposal. Shovel the material into waste container. Following product recovery, flush area with water.

Small Spills: Sweep up or vacuum up spillage to avoid the generation of dust during clean-up and collect in suitable container for disposal.

6.4 Reference of other sections

Additional information For personal protection, see section 8 of the SDS. For waste disposal, see section 13.

SECTION 7: Handling and Storage

7.1 Precautions for safe handling

Protective measures

Advice on safe handling Wear appropriate personal protective equipment. Do not breathe dust from this material, avoid creating any dust and contact with skin and eyes as this may cause irritation.

Fire preventions During handling electrostatic charges can accumulate, therefore static electricity and formation of sparks must be prevented, use proper bonding and/or grounding procedures.

Aerosol and dust generation preventions Keep formation of airborne dusts to a minimum. Provide appropriate exhaust ventilation at places where dust is formed.

Environment precautions No special environmental precautions required.

Advice on general occupational hygiene Observe good industrial hygiene practices.

7.2 Conditions for safe storage, including any incompatibilities

Technical measures and storage conditions Suitable for any general chemical storage area. Provide appropriate exhaust ventilation at places where dust is formed.

Packaging materials Keep all material in an air-tight container, material is hygroscopic.

Requirements for storage rooms and vessels All containers must be kept in a dry, cool place. Store in a well-ventilated place.

Hints on storage assembly:

Storage class Not Available

Materials to avoid Not Applicable

7.3 Specific end uses

Recommendations Not applicable

Specific end uses The specified uses for this material are shown in section 1 of the document.

Safety Data Sheet

According to Regulation (EC) No 1907/2006 (REACH)

BROWNELL
L I M I T E D

Trade Name: Brownell Limited

Product: Self-Indicating Silica Gel, Orange to Green

Version No: MCS/101/01/MSDS - 06 / EN

Revision Date: 03.01.2017

Print Date: 03.01.2017

SECTION 8: Exposure controls/personal protection

8.1 Control Parameters

8.1.1 Occupational exposure limits:

UK. EH40 Workplace Exposure Limits (WELs)

Substance Name	EC-No.	CAS-No.	Type	Value	Occupational exposure limit value	
					Long Term	Short Term
Silica, Amorphous – Inhalable dust	231-545-4	(12926-00-8) 7631-86-9	TWA	OES 6mg/m ³	8 Hours	-
Silica, Amorphous – Respirable dust	231-545-4	(12926-00-8) 7631-86-9	TWA	OES 2.4mg/m ³	8 Hours	-
Silica gel	231-545-4	(12926-00-8) 7631-86-9	TWA	ACGIH: TLV 10mg/m ³	8 Hours	-
Methyl Violet	208-953-6	548-62-9	TWA	ACGIH: 0.5mg/m ³	8 Hours	-

8.1.2 Biological limits values No biological exposure limits noted for the ingredient(s).

8.1.3 Exposure limits at intended use Not applicable

8.1.4 DNEL/PNEC-values DNEL / PNEC < 1 = No immediate concern

8.1.5 Risk management measures according to used control banding approach Not applicable

8.2 Exposure controls

8.2.1 Appropriate engineering controls: Engineering methods to prevent or control exposure are preferred. Methods include process or personnel enclosure, mechanical ventilation (dilution and local exhaust) and control of process conditions.

8.2.2 Personal protective equipment

Eye / Face protection:

Suitable eye protection

Wear suitable eye protection (safety glasses with side shields).

Skin protection:

Hand protection

Body protection

Suitable gloves can be recommended by the glove supplier.

Wear lab coat over normal work clothing (long sleeved shirts and long pants) is recommended.

Safety Data Sheet

According to Regulation (EC) No 1907/2006 (REACH)

BROWNELL
L I M I T E D

Trade Name: Brownell Limited

Product: Self-Indicating Silica Gel, Orange to Green

Version No: MCS/101/01/MSDS - 06 / EN

Revision Date: 03.01.2017

Print Date: 03.01.2017

Respiratory protection	Avoid inhalation of dust. Wear suitable respiratory protection equipment if working in confined spaces with inadequate ventilation or whenever there is any risk of the exposure limits being exceeded.
Thermal hazards	None known
8.2.3 Environmental exposure controls	None known

SECTION 9: Physical and chemical properties

9.1 Information on basic physical and chemical properties

Appearance:

Physical state: Solid beads

Colour: Dry: Yellow/Orange Saturated: Green

Odour: Odourless

pH	2-10 (5% Aqueous Solution)
Melting Point	>1000°C
Boiling Point	Not Applicable
Flash Point	Not Applicable
Evaporation rate	Not available
Flammability (solid, gas)	Non-flammable
Upper/lower flammability or explosive limits	
Upper explosive limits	Not Applicable
Lower explosive limits	Not Applicable
Vapour pressure	Not available
Vapour density	Not available
Relative density	2.1 (water = 1)
Solubility(ies)	Less 1.0% in weight
Partition coefficient: n-octanol/water	Not available
Auto-ignition temperature	Not available
Decomposition temperature	Not available
Viscosity	Not available
Viscosity, dynamic	Not available
Viscosity, cinematic	Not available
Explosive properties	Not available
Oxidising properties	Not available

9.2 Other information:

Physical hazards

Explosives:	Not available
Flammable gases:	Not applicable
Flammable aerosols:	Not applicable
Oxidising gases:	Not available
Gases under pressure:	Not available

Safety Data Sheet

According to Regulation (EC) No 1907/2006 (REACH)

BROWNELL
L I M I T E D

Trade Name: Brownell Limited

Product: Self-Indicating Silica Gel, Orange to Green

Version No: MCS/101/01/MSDS - 06 / EN

Revision Date: 03.01.2017

Print Date: 03.01.2017

Flammable liquids:	Not applicable
Flammable solids:	Not applicable
Self-reactive substances and mixtures	Not available
Pyrophoric liquids	Not available
Pyrophoric solids	Not available
Self-heating substances and mixtures	Not available
Substances or mixtures which, in contact with water emit flammable gases	Not available
Oxidising liquids	Not available
Oxidising solids	Not available
Organic peroxides	Not available
Metal corrosion	Not available

SECTION 10: Stability and reactivity

10.1 Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport
10.2 Chemical stability	Material is stable under normal conditions and hygroscopic
10.3 Possibility of hazardous reactions	No dangerous reaction known under conditions of normal use
10.4 Conditions to avoid	Not available
10.5 Incompatible materials	Not available
10.6 Hazardous decomposition products	No hazardous decomposition products are known

SECTION 11: Toxicological information

11.1 Information on toxicological effects

11.1.1 Substances

Acute toxicity: Animal data

Substance	Effect dose / concentration	Value	Species
Acute oral toxicity	LD50	>15,000mg/kg	Rat
Acute dermal toxicity	LD50	>5,000mg/kg	Rabbit
Acute inhalation	LC50	>0.139mg/1/14h	Rat

Skin corrosion/irritation	No data available
Eye damage/irritation	No data available

Safety Data Sheet

According to Regulation (EC) No 1907/2006 (REACH)

BROWNELL
L I M I T E D

Trade Name: Brownell Limited

Product: Self-Indicating Silica Gel, Orange to Green

Version No: MCS/101/01/MSDS - 06 / EN

Revision Date: 03.01.2017

Print Date: 03.01.2017

Sensitisation to the respiratory tract/skin	No data available
Germ cell mutagenicity	No data available
Carcinogenicity	Amorphous silica is not classifiable as to its carcinogenicity to humans (Group 3).
Reproductive toxicity	No data available
Specific target organ toxicity (single exposure)	No data available
Specific target organ toxicity (repeated exposure)	No data available
Aspiration hazard	Dust may irritate lungs. Amorphous silica is not known to cause silicosis.
Physical, chemical and toxicological characteristics	
In case of ingestion	No data available
In case of skin contact	Dust may have a drying effect on the skin.
In case of inhalation	Synthetic amorphous silica gel has little adverse effect on lungs and does not produce significant disease or toxic effect when exposure is kept below the permitted limits. However existing medical conditions (eg asthma, bronchitis) may be aggravated by exposure to dust. Effects of dust may be greater and occur at lower levels of exposure in smokers compared to non-smokers.
In case of eye contact	Dust may cause discomfort and mild irritation.
11.1.2 Mixtures	No data available
SECTION 12: Ecological information	
12.1 Toxicity	Synthetic amorphous silica is virtually inert and has no known adverse effect on the environment and not toxic to aquatic life
12.2 Persistence and degradability	The product solely consists of inorganic compounds which are not biodegradable. The methods for determining the biological degradability are not applicable to inorganic substances.
12.3 Bioaccumulative potential	Does not bioaccumulate.
12.4 Mobility in soil	Insoluble and thus presents a low mobility in most soils.
12.5 Results of PBT and vPvB assessment	This substance is not classified as PBT or vPvB according to current EU criteria.
12.6 Other adverse effects	No data available
SECTION 13: Disposal considerations	
13.1 Waste treatment methods	
Product / packaging disposal	Product can be reactivated in an oven for re-use.

Safety Data Sheet

According to Regulation (EC) No 1907/2006 (REACH)

BROWNELL
L I M I T E D

Trade Name: Brownell Limited

Product: Self-Indicating Silica Gel, Orange to Green

Version No: MCS/101/01/MSDS - 06 / EN

Revision Date: 03.01.2017

Print Date: 03.01.2017

Waste codes / waste designations according to EWC/AVV	The Waste code should be assigned in discussion between the user, the producer and the waste disposal company. This material is not classified as hazardous waste under EEC Directive 91/689/EEC.
Packaging	No data available
Waste treatment options	Disposal of in accordance with all applicable local and national regulations. This material is not classified as special waste under UK Special Waste Regulations 1996 and can be disposed of by landfill at an approved site.
Other disposal recommendations	Dispose in accordance with all applicable regulations.

SECTION 14: Transport information

14.1 UN No.	Not classified as dangerous goods under the United Nations Transport Recommendations.
14.2 UN Proper Shipping name	Not applicable.
14.3 Transport hazard class(es) Hazard label(s)	Not applicable.
14.4 Packing group	Not applicable.
14.5 Environmental hazards	Not applicable.
14.6 Special precautions for user	Not applicable.
14.7 Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code	Not applicable.
Land transport (ADR/RID)	Not regarded as dangerous goods
Inland Waterway transport (ADN)	Not regarded as dangerous goods
Sea transport (IMDG)	Not regarded as dangerous goods
Air transport (ICAO-TI / IATA- DGR)	Not regarded as dangerous goods

SECTION 15: Regulatory information

15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture

15.1.1 EU regulations

Authorisations:	Not applicable
Restrictions on use:	Not applicable

Safety Data Sheet

According to Regulation (EC) No 1907/2006 (REACH)

BROWNELL
L I M I T E D

Trade Name: Brownell Limited

Product: Self-Indicating Silica Gel, Orange to Green

Version No: MCS/101/01/MSDS - 06 / EN

Revision Date: 03.01.2017

Print Date: 03.01.2017

Other EU Regulations:

Directive 2010/75/EC on industrial emissions

Not listed

Directive 2004/42/CE on the limitation of emissions of volatile organic compounds

Not listed

Regulation (EC) No. 842/2006 on certain fluorinated greenhouse gases

Not listed

Regulation (EC) No. 1005/2009 on substances that deplete the ozone layer, Annex I

Not Listed

Regulation (EC) No. 1005/2009 on substances that deplete the ozone layer, Annex II

Not Listed

Regulation (EC) No. 649/2012 concerning the export and import of dangerous chemicals, Annex I, Part 1 as amended

Not Listed

Regulation (EC) No. 649/2012 concerning the export and import of dangerous chemicals, Annex I, Part 2 as amended

Not Listed

Regulation (EC) No. 649/2012 concerning the export and import of dangerous chemicals, Annex I, Part 3 as amended

Not Listed

Regulation (EC) No. 649/2012 concerning the export and import of dangerous chemicals, Annex V as amended

Not Listed

15.1.2 National regulations Not Available

15.2 Chemical safety assessment No Chemical Safety Assessment has been carried out.

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of New and Existing Chemicals (EINECS)	Yes

Safety Data Sheet

According to Regulation (EC) No 1907/2006 (REACH)

BROWNELL
L I M I T E D

Trade Name: Brownell Limited

Product: Self-Indicating Silica Gel, Orange to Green

Version No: MCS/101/01/MSDS - 06 / EN

Revision Date: 03.01.2017

Print Date: 03.01.2017

Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	Yes
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

SECTION 16: Other information

16.1 Indication of changes	MSDS first issued MSDS revision MSDS Revised MSDS Revised MSDS Revised	18 th April 2000 20 th November 2002 10 th December 2008 11 th October 2011 12 th May 2014
16.2 Abbreviations and acronyms	Not applicable	
16.3 Key literature references and sources for data	ECHA European Chemicals agency	
16.4 Classification for mixtures and used evaluation method according to regulation (EC) 1272/2008 [CLP]	Regulation (EU) No. 1272/2008. Classification, labelling and packaging of substances and mixtures. The product does not need to be labelled in accordance with Directive 67/548/EEC. Not classified as a hazardous substance or mixture according to Directive 1999/45/EC.	
16.5 Relevant R-, H- and EUH-phrases (number and full text)	Not applicable	
16.6 Training advice	Follow training instructions when handling this material.	
16.7 Further information	Not available.	
Disclaimer	The information provided in the SDS is correct to the best of our knowledge at the date of publication. This document is intended as a guide for safe handling, storage and use in known industrial applications. The manufacturer makes no representation, warranty or guarantee as to its accuracy, reliability or completeness nor assumes any liability for its use. It is the users responsibility to confirm in advance that the information is current, applicable and suitable to their circumstances for each particular use. No representative of ours has authority to waive this provision.	

ist POWER